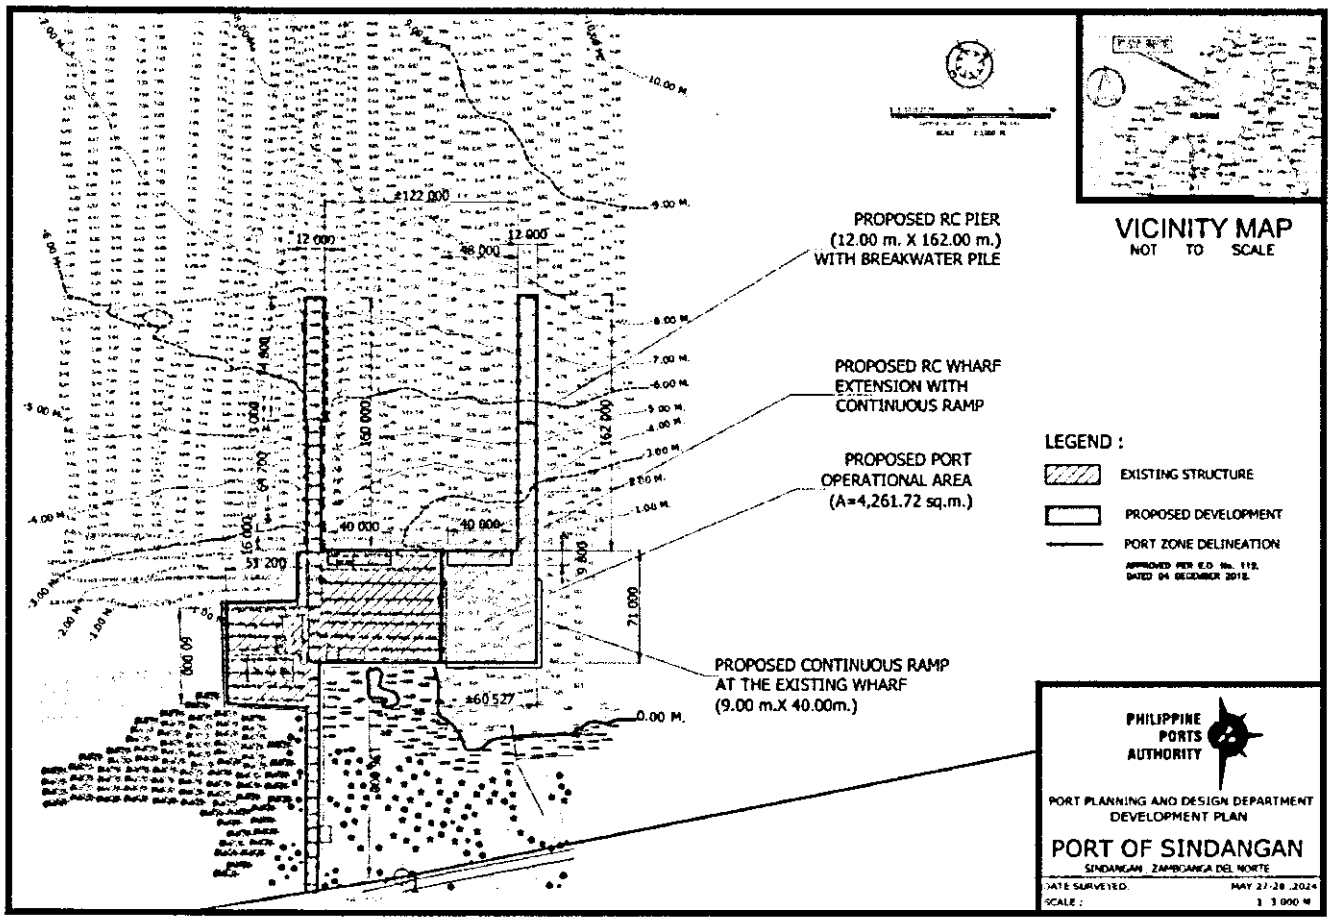
PHILIPPINE PORTS AUTHORITY

SINDANGAN PORT EXPANSION PROJECT

PORT OF SINDANGAN, SINDANGAN, ZAMBOANGA DEL NORTE
(HO-INFRA-PPDD-24-0031)



BID DOCUMENTS

AUGUST 2024

TABLE OF CONTENTS

PAGE

Glossary of Terms, Abbreviations, and Acronyms ..... iv-v

SECTION I INVITATION TO BID 1-2

SECTION II INSTRUCTIONS TO BIDDERS ..... ITB 1-6

1. Scope of Bid 1
2. Funding Information 1
3. Bidding Requirements 1
4. Corrupt, Fraudulent, Collusive, Coercive, and Obstructive Practices 1
5. Eligible Bidders 2
6. Origin of Associated Goods 2
7. Subcontracts 2
8. Pre-Bid Conference 2
9. Clarification and Amendment of Bidding Documents 3
10. Documents Comprising the Bid: Eligibility and Technical Components 3
11. Documents Comprising the Bid: Financial Component 3
12. Alternative Bids 4
13. Bid Prices 4
14. Bid and Payment Currencies 4
15. Bid Security 4
16. Sealing and Marking of Bids 4
17. Deadline for Submission of Bids 5
18. Opening and Preliminary Examination of Bids 5
19. Detailed Evaluation and Comparison of Bids 5
20. Post Qualification 5
21. Signing of Contract 6

SECTION III BID DATA SHEET ..... BDS 1-2

SECTION IV GENERAL CONDITIONS OF CONTRACT ..... GCC 1-4

1. Scope of Contract 1
2. Sectional Completion of Works 1
3. Possession of Site 1
4. The Contractor's Obligations 1
5. Performance Security 2
6. Site Investigation Reports 2
7. Warranty 2
8. Liability of the Contractor 2
9. Termination for Other Causes 2
10. Dayworks 3
11. Program of Work 3
12. Instructions, Inspections and Audits 3
13. Advance Payment 3
14. Progress Payment 3
15. Operating and Maintenance Manuals 4

SECTION V SPECIAL CONDITIONS OF CONTRACT ..... SCC 1

SECTION VI TECHNICAL SPECIFICATIONS ..... TS 1-89

Item 1: Demolition and Removal Works
1. Description 1
2. General Provisions 1
3. Execution 2

Item 2: Excavation Works
1. Scope of Work 3
2. Execution 4

Item 3: Piling works (Steel Sheet Piles)
1. Scope of Work 6
2. Material Requirements 6
3. Execution 17

Item 4: Reinforced Concrete
1. Scope of Work 20
2. Material Requirements... 26
3. Execution 32

Item 5: Piling Works (Pre-Stressed Concrete Piles)
1. Scope of Work..... 44
2. Material Requirements 44
3. Execution 45

Item 6: Rockworks
1. Scope of Work 49
2. Material Requirements 49
3. Execution 49

Item 7: Geotextile Fabric
1. Scope of Work 51
2. Material Requirements 51
3. Execution 52

Item 8: Reclamation and Fill
1. Scope of Work 53
2. Material Requirements 53
3. Execution 55

Item 9: Aggregate Sub-base course
1. Description 58
2. Material Requirements 58
3. Construction Requirements..... 58

Item 10: Aggregate Base Course
1. Description 61
2. Material Requirements 61
3. Construction Requirements..... 62

Item 11: Portland Cement Concrete Pavement
1. Scope of Work 65
2. Material Requirements 65
3. Execution..... 66

Item 12: Security Fence
1. Description 71
2. Material Requirements 71
3. Construction Requirements..... 72

Item 13: Drainage Works
1. Scope of Work 74
2. Material Requirements 74
3. Execution..... 75

Item 14: Mooring and Fendering System
1. Scope of Work 77
2. Material Requirements 77
3. Execution..... 81

Item 15: Electrical Works
1. Scope of Work 82
2. Material Requirements 83

3. Execution 85

Item 16: Project Billboard
1. Specification 86
2. Standard Project Billboard 87
3. Billboard Frame 88

Item 17: Safety Signages and Barricades
1. Description 89
2. Specifications 89

SECTION VII DRAWINGS (APPROVED PLANS) ..... PD 1-2

SECTION VIII BILL OF QUANTITIES AND ATTACHMENTS ..... BQ 1-32

1a Bid Summary 1-1
1b Bill of Quantities 1
2. Annex 1 (Basis of Payments) 9
3. Annex 2 (Facilities to be Provided) 20
4. Annex 3 (Minimum Equipment Requirements) 21
5. Annex 4 (Construction Safety and Health Requirements) 22
6. Annex 5 (Minimum Testing Requirements) 23

SECTION IX Checklist of Technical and Financial Documents ..... CL 1-2

SECTION X BIDDING FORMS ..... BF 1-22

1. Bid Form 1
2. Statement of all On-going Government and Private Contracts, including contracts awarded but not yet started 3
3. Statement of the Bidder's Single Largest Completed Contracts (SLCC) Similar to the Contract to be Bid 4
4. Experience Record on Similarly Completed Projects 5
5. Financial Data 6
6. List of Contractor's Personnel 7
7. List of Contractor's Equipment Units 8
8. Omnibus Sworn Statement for Sole Proprietorship 9
9. Omnibus Sworn Statement for Partnership or Cooperative 11
10. Omnibus Sworn Statement for Corporation or Joint Venture 13
11. Bid-Securing Declaration 15
12. Construction Methodology 16
13. Manpower Schedule 18
14. Equipment Utilization Schedule 19
15. Cash Flow by Quarter and Payment Schedule 20
16. Contract Agreement 21

GLOSSARY OF TERMS, ABBREVIATIONS, AND ACRONYMS

Glossary of Terms, Abbreviations, and Acronyms

ABC – Approved Budget for the Contract.

ARCC – Allowable Range of Contract Cost.

BAC – Bids and Awards Committee.

Bid – A signed offer or proposal to undertake a contract submitted by a bidder in response to and in consonance with the requirements of the bidding documents. Also referred to as *Proposal* and *Tender.* (2016 revised IRR, Section 5[c])

Bidder – Refers to a contractor, manufacturer, supplier, distributor and/or consultant who submits a bid in response to the requirements of the Bidding Documents. (2016 revised IRR, Section 5[d])

Bidding Documents – The documents issued by the Procuring Entity as the bases for bids, furnishing all information necessary for a prospective bidder to prepare a bid for the Goods, Infrastructure Projects, and/or Consulting Services required by the Procuring Entity. (2016 revised IRR, Section 5[e])

BIR – Bureau of Internal Revenue.

BSP – Bangko Sentral ng Pilipinas.

CDA – Cooperative Development Authority.

Consulting Services – Refer to services for Infrastructure Projects and other types of projects or activities of the GOP requiring adequate external technical and professional expertise that are beyond the capability and/or capacity of the GOP to undertake such as, but not limited to: (i) advisory and review services; (ii) pre-investment or feasibility studies; (iii) design; (iv) construction supervision; (v) management and related services; and (vi) other technical services or special studies. (2016 revised IRR, Section 5[i])

Contract – Refers to the agreement entered into between the Procuring Entity and the Supplier or Manufacturer or Distributor or Service Provider for procurement of Goods and Services; Contractor for Procurement of Infrastructure Projects; or Consultant or Consulting Firm for Procurement of Consulting Services; as the case may be, as recorded in the Contract Form signed by the parties, including all attachments and appendices thereto and all documents incorporated by reference therein.

Contractor – is a natural or juridical entity whose proposal was accepted by the Procuring Entity and to whom the Contract to execute the Work was awarded. Contractor as used in these Bidding Documents may likewise refer to a supplier, distributor, manufacturer, or consultant.

CPI – Consumer Price Index.

DOLE – Department of Labor and Employment.

DTI – Department of Trade and Industry.

Foreign-funded Procurement or Foreign-Assisted Project – Refers to procurement whose funding source is from a foreign government, foreign or international financing institution as specified in the Treaty or International or Executive Agreement. (2016 revised IRR, Section 5[b]).

GFI – Government Financial Institution.

GOCC – Government-owned and/or –controlled corporation.

Goods – Refer to all items, supplies, materials and general support services, except Consulting Services and Infrastructure Projects, which may be needed in the transaction of public businesses or in the pursuit of any government undertaking, project or activity, whether in the nature of equipment, furniture, stationery, materials for construction, or personal property of any kind, including non-personal or contractual services such as the repair and maintenance of equipment and furniture, as well as trucking, hauling, janitorial, security, and related or analogous services, as well as procurement of materials and supplies provided by the Procuring Entity for such services. The term "related" or "analogous services" shall include, but is not limited to, lease or purchase of office space, media advertisements, health maintenance services, and other services essential to the operation of the Procuring Entity. (2016 revised IRR, Section 5[r])

GOP – Government of the Philippines.

Infrastructure Projects – Include the construction, improvement, rehabilitation, demolition, repair, restoration or maintenance of roads and bridges, railways, airports, seaports, communication facilities, civil works components of information technology projects, irrigation, flood control and drainage, water supply, sanitation, sewerage and solid waste management systems, shore protection, energy/power and electrification facilities, national buildings, school buildings, hospital buildings, and other related construction projects of the government. Also referred to as *civil works or works*. (2016 revised IRR, Section 5[u])

LGUs – Local Government Units.

NFCC – Net Financial Contracting Capacity.

NGA – National Government Agency.

PCAB – Philippine Contractors Accreditation Board.

PhilGEPS - Philippine Government Electronic Procurement System.

Procurement Project – refers to a specific or identified procurement covering goods, infrastructure project or consulting services. A Procurement Project shall be described, detailed, and scheduled in the Project Procurement Management Plan prepared by the agency which shall be consolidated in the procuring entity's Annual Procurement Plan. (GPPB Circular No. 06-2019 dated 17 July 2019)

PSA – Philippine Statistics Authority.

SEC – Securities and Exchange Commission.

SLCC – Single Largest Completed Contract.

UN – United Nations.

SECTION I

INVITATION TO BID

BAGONG PILIPINAS

PHILIPPINE PORTS AUTHORITY

INVITATION TO BID

FOR THE

SINDANGAN PORT EXPANSION PROJECT, PORT OF SINDANGAN, ZAMBOANGA DEL NORTE

The Philippine Ports Authority, through the Corporate Budget of the Authority for CY 2024, intends to apply the sum of **P537,726,447.67** being the Approved Budget for the Contract (ABC) to payments under the contract for the **SINDANGAN PORT EXPANSION PROJECT, PORT OF SINDANGAN, SINDANGAN, ZAMBOANGA DEL NORTE (HO-INFRA-PPDD-24-0031).** Bids received in excess of the ABC shall be automatically rejected at bid opening.

The Philippine Ports Authority now invites bids for the above Procurement Project. Completion of the Works is required in **Seven Hundred Twenty (720) calendar days** from the receipt by the successful bidder of the Notice to Proceed. Bidders should have completed a contract similar to the Project. The description of an eligible bidder is contained in the Bidding Documents, particularly, in Section II (Instructions to Bidders).

Bidding will be conducted through open competitive bidding procedures using a non-discretionary "pass/fail" criterion as specified in the 2016 Revised Implementing Rules and Regulations (IRR) of Republic Act (RA) 9184.

Interested bidders may obtain further information from the Philippine Ports Authority Bids and Awards Committee (BAC) and inspect the Bidding Documents at the address given below from 8:00 a.m. to 5:00 p.m., Monday to Friday.

A complete set of Bidding Documents may be acquired by interested Bidders on **13 August 2024** from the given address and website(s) below and upon payment of the applicable fee for the Bidding Documents, pursuant to the latest Guidelines issued by the GPPB, in the amount of **SEVENTY FIVE THOUSAND PESOS (P75,000.00).** The Procuring Entity shall allow the bidder to present its proof of payment for the fees in person.

The Philippine Ports Authority's Bids and Awards Committee will hold a Pre-Bid Conference on **23 August 2024 at 10:00 a.m.** at the PPA Function Room, 7th Floor, PPA Bldg., Bonifacio Drive, South Harbor, Port Area, Manila, which shall be open to all prospective bidders.

Bids must be duly received by the BAC Secretariat through manual submission at the office address indicated below on or before **05 September 2024 at 8:00 a.m.** Late bids shall not be accepted.

All bids must be accompanied by a bid security in any of the acceptable forms and in amount stated in ITB Clause 16.

Bid opening shall be on **05 September 2024 at 9:00 a.m.** at the 7th Floor, PPA Building, A. Bonifacio Drive, South Harbor, Port Area, Manila. Bids will be opened in the presence of the bidders' representatives who choose to attend the activity.

The Philippine Ports Authority reserves the right to reject any and all bids, declare a failure of bidding, or not award the contract at any time prior to contract award in accordance with Sections 35.6 and 41 of the 2016 revised Implementing Rules and Regulations of RA No. 9184, without thereby incurring any liability to the affected bidder or bidders.

- **Required PCAB Registration: LARGE B – Port, Harbor and Offshore Engineering**

For further information, please refer to:

BAC Secretariat, Philippine Ports Authority
5th Floor, PPA Bldg., A. Bonifacio Drive,
South Harbor, Port Area, Manila
Telephone Nos. 8 527-47-35
8 527-83-56 to 83 loc. 539
PPA Website: www.ppa.com.ph
PhilGEPS Website: www.philgeps.gov.ph

MARK JON S. PALOMAR
Chairperson, PPA Head Office Bids and Awards
Committee for Engineering Projects (HO-BAC-EP)

SECTION II

INSTRUCTIONS TO BIDDERS

1. Scope of Bid

The Procuring Entity, ***Philippine Ports Authority*** invites Bids for ***Sindangan Port Expansion Project, Port of Sindangan, Sindangan, Zamboanga del Norte*** with Project Identification Number ***HO-INFRA-PPDD-24-0031.***

The ***Sindangan Port Expansion Project, Port of Sindangan, Sindangan, Zamboanga del Norte*** is for the construction of Works, as described in Section VI (Specifications).

2. Funding Information

2.1. The ***Philippine Ports Authority*** through the source of funding as indicated below for ***CY2024*** in the amount of **₱ 537,726,447.67**.

2.2. The source of funding is:

PPA Corporate Fund.

3. Bidding Requirements

The Bidding for the Project shall be governed by all the provisions of RA No. 9184 and its 2016 revised IRR, including its Generic Procurement Manual and associated policies, rules and regulations as the primary source thereof, while the herein clauses shall serve as the secondary source thereof.

Any amendments made to the IRR and other GPPB issuances shall be applicable only to the ongoing posting, advertisement, or invitation to bid by the BAC through the issuance of a supplemental or bid bulletin.

The Bidder, by the act of submitting its Bid, shall be deemed to have inspected the site, determined the general characteristics of the contracted Works and the conditions for this Project, such as the location and the nature of the work; (b) climatic conditions; (c) transportation facilities; (c) nature and condition of the terrain, geological conditions at the site communication facilities, requirements, location and availability of construction aggregates and other materials, labor, water, electric power and access roads; and (d) other factors that may affect the cost, duration and execution or implementation of the contract, project, or work and examine all instructions, forms, terms, and project requirements in the Bidding Documents.

4. Corrupt, Fraudulent, Collusive, Coercive, and Obstructive Practices

The Procuring Entity, as well as the Bidders and Contractors, shall observe the highest standard of ethics during the procurement and execution of the contract. They or through an agent shall not engage in corrupt, fraudulent, collusive, coercive, and obstructive practices defined under Annex "I" of the 2016 revised IRR of RA No. 9184 or other integrity violations in competing for the Project.

5. Eligible Bidders

5.1 Only Bids of Bidders found to be legally, technically, and financially capable will be evaluated.

5.2 The Bidder must have an experience of having completed a Single Largest Completed Contract (SLCC) that is similar to this Project, equivalent to at least fifty percent (50%) of the ABC adjusted, if necessary, by the Bidder to current prices using the PSA's CPI, except under conditions provided for in Section 23.4.2.4 of the 2016 revised IRR of RA No. 9184.

A contract is considered to be "similar" to the contract to be bid if it has the major categories of work stated in the **BDS.**

5.3. For Foreign-funded Procurement, the Procuring Entity and the foreign government/foreign or international financing institution may agree on another track record requirement, as specified in the Bidding Document prepared for this purpose.

5.4. The Bidders shall comply with the eligibility criteria under Section 23.4.2 of the 2016 IRR of RA No. 9184.

6. Origin of Associated Goods

There is no restriction on the origin of Goods other than those prohibited by a decision of the UN Security Council taken under Chapter VII of the Charter of the UN.

7. Subcontracts

7.1. The Bidder may subcontract portions of the Project to the extent allowed by the Procuring Entity as stated herein, but in no case more than fifty percent (50%) of the Project.

The Procuring Entity has prescribed that:

Subcontracting is not allowed.

7.2. Subcontracting of any portion of the Project does not relieve the Contractor of any liability or obligation under the Contract. The Supplier will be responsible for the acts, defaults, and negligence of any subcontractor, its agents, servants, or workmen as fully as if these were the Contractor's own acts, defaults, or negligence, or those of its agents, servants, or workmen.

8. Pre-Bid Conference

The Procuring Entity will hold a pre-bid conference for this Project on the specified date and time and either at its physical address and/or through videoconferencing/webcasting as indicated in paragraph 6 of the **IB.**

9. Clarification and Amendment of Bidding Documents

Prospective bidders may request for clarification on and/or interpretation of any part of the Bidding Documents. Such requests must be in writing and received by the Procuring Entity, either at its given address or through electronic mail indicated in the **IB**, at least ten (10) calendar days before the deadline set for the submission and receipt of Bids.

10. Documents Comprising the Bid: Eligibility and Technical Components

10.1 The first envelope shall contain the eligibility and technical documents of the Bid as specified in **Section IX. Checklist of Technical and Financial Documents.**

10.2 If the eligibility requirements or statements, the bids, and all other documents for submission to the BAC are in foreign language other than English, it must be accompanied by a translation in English, which shall be authenticated by the appropriate Philippine foreign service establishment, post, or the equivalent office having jurisdiction over the foreign bidder's affairs in the Philippines. For Contracting Parties to the Apostille Convention, only the translated documents shall be authenticated through an apostille pursuant to GPPB Resolution No. 13-2019 dated 23 May 2019. The English translation shall govern, for purposes of interpretation of the bid.

10.3 A valid PCAB License is required, and in case of joint ventures, a valid special PCAB License, and registration for the type and cost of the contract for this Project. Any additional type of Contractor license or permit shall be indicated in the **BDS.**

10.4 A List of Contractor's key personnel (e.g., Project Manager, Project Engineers, Materials Engineers, and Foremen) assigned to the contract to be bid, with their complete qualification and experience data shall be provided. These key personnel must meet the required minimum years of experience set in the **BDS.**

10.5 A List of Contractor's major equipment units, which are owned, leased, and/or under purchase agreements, supported by proof of ownership, certification of availability of equipment from the equipment lessor/vendor for the duration of the project, as the case may be, must meet the minimum requirements for the contract set in the **BDS.**

11. Documents Comprising the Bid: Financial Component

11.1. The second bid envelope shall contain the financial documents for the Bid as specified in Section **IX. Checklist of Technical and Financial Documents.**

11.2. Any bid exceeding the ABC indicated in paragraph 1 of the **IB** shall not be accepted.

11.3. For Foreign-funded procurement, a ceiling may be applied to bid prices provided the conditions are met under Section 31.2 of the 2016 revised IRR of RA No. 9184.

12. Alternative Bids

Bidders shall submit offers that comply with the requirements of the Bidding Documents, including the basic technical design as indicated in the drawings and specifications. Unless there is a value engineering clause in the BDS, alternative Bids shall not be accepted.

13. Bid Prices

All bid prices for the given scope of work in the Project as awarded shall be considered as fixed prices, and therefore not subject to price escalation during contract implementation, except under extraordinary circumstances as determined by the NEDA and approved by the GPPB pursuant to the revised Guidelines for Contract Price Escalation guidelines.

14. Bid and Payment Currencies

14.1. Bid prices may be quoted in the local currency or tradeable currency accepted by the BSP at the discretion of the Bidder. However, for purposes of bid evaluation, Bids denominated in foreign currencies shall be converted to Philippine currency based on the exchange rate as published in the BSP reference rate bulletin on the day of the bid opening.

14.2. *Payment of the contract price shall be made in:*

Philippine Pesos.

15. Bid Security

15.1. The Bidder shall submit a Bid Securing Declaration or any form of Bid Security in the amount indicated in the BDS, which shall be not less than the percentage of the ABC in accordance with the schedule in the BDS.

15.2. The Bid and bid security shall be valid until **One Hundred Twenty (120) days from the date set for Bid Opening**. Any bid not accompanied by an acceptable bid security shall be rejected by the Procuring Entity as non-responsive.

16. Sealing and Marking of Bids

Each Bidder shall submit one copy of the first and second components of its Bid.

The Procuring Entity may request additional hard copies and/or electronic copies of the Bid. However, failure of the Bidders to comply with the said request shall not be a ground for disqualification.

If the Procuring Entity allows the submission of bids through online submission to the given website or any other electronic means, the Bidder shall submit an electronic copy of its Bid, which must be digitally signed. An electronic copy that cannot be opened or is corrupted shall be considered non-responsive and, thus, automatically disqualified.

17. Deadline for Submission of Bids

The Bidders shall submit on the specified date and time and either at its physical address or through online submission as indicated in paragraph 7 of the **IB**.

18. Opening and Preliminary Examination of Bids

18.1. The BAC shall open the Bids in public at the time, on the date, and at the place specified in paragraph 9 of the **IB**. The Bidders' representatives who are present shall sign a register evidencing their attendance. In case videoconferencing, webcasting or other similar technologies will be used, attendance of participants shall likewise be recorded by the BAC Secretariat.

In case the Bids cannot be opened as scheduled due to justifiable reasons, the rescheduling requirements under Section 29 of the 2016 revised IRR of RA No. 9184 shall prevail.

18.2. The preliminary examination of Bids shall be governed by Section 30 of the 2016 revised IRR of RA No. 9184.

19. Detailed Evaluation and Comparison of Bids

19.1. The Procuring Entity's BAC shall immediately conduct a detailed evaluation of all Bids rated "passed" using non-discretionary pass/fail criteria. The BAC shall consider the conditions in the evaluation of Bids under Section 32.2 of 2016 revised IRR of RA No. 9184.

19.2. If the Project allows partial bids, all Bids and combinations of Bids as indicated in the **BDS** shall be received by the same deadline and opened and evaluated simultaneously so as to determine the Bid or combination of Bids offering the lowest calculated cost to the Procuring Entity. Bid Security as required by **ITB** Clause 16 shall be submitted for each contract (lot) separately.

19.3 In all cases, the NFCC computation pursuant to Section 23.4.2.6 of the 2016 revised IRR of RA No. 9184 must be sufficient for the total of the ABCs for all the lots participated in by the prospective Bidder.

20. Post Qualification

Within a non-extendible period of five (5) calendar days from receipt by the Bidder of the notice from the BAC that it submitted the Lowest Calculated Bid, the Bidder shall submit its latest income and business tax returns filed and paid through the BIR Electronic Filing and Payment System (eFPS), and other appropriate licenses and permits required by law and stated in the **BDS**.

21. Signing of the Contract

The documents required in Section 37.2 of the 2016 revised IRR of RA No. 9184 shall form part of the Contract. Additional Contract documents are indicated in the **BDS**.

SECTION III

BID DATA SHEET

Bid Data Sheet

<table>
<tr><td>ITB Clause</td><td colspan="3"></td></tr>
<tr><td>5.2</td><td colspan="3">For this purpose, contracts similar to the Project refer to contracts which have the same Major Categories of Works which shall be:
<table>
<tr><th>Description/Clarification</th><th>Unit of Measure</th><th>Quantity (at least)</th></tr>
<tr><td>1. Pile Driving Works (Off-Shore)</td><td>l.m.</td><td>9,239</td></tr>
<tr><td>2. Reinforced Concrete Works</td><td>cu.m.</td><td>996</td></tr>
<tr><td>3. Rockworks (50-1,000 kg/pc)</td><td>cu.m.</td><td>3,422</td></tr>
<tr><td>4. Placing of fill materials</td><td>cu.m.</td><td>10,746</td></tr>
</table></td></tr>
<tr><td>7.1</td><td>Portion of Works allowed to be subcontracted:

Subcontracting is not allowed</td><td colspan="2">Maximum Percentage allowed to be subcontracted:

Subcontracting is not allowed</td></tr>
<tr><td>10.3</td><td colspan="3">For Joint Venture:
Special PCAB License</td></tr>
<tr><td>10.4</td><td colspan="3">The key personnel must meet the required minimum years of experience set below:
<table>
<tr><th>Key Personnel</th><th>General Experience</th><th>Relevant Experience (Minimum)</th></tr>
<tr><td>a. Project Manager</td><td></td><td>Five (5) years</td></tr>
<tr><td>b. Project Engineer</td><td></td><td>Three (3) years</td></tr>
<tr><td>c. Materials Engineer II</td><td></td><td>One (1) year</td></tr>
<tr><td>d. Construction Safety and Health Officer</td><td></td><td>One (1) year</td></tr>
<tr><td>e. Foreman</td><td></td><td>Five (5) years</td></tr>
</table></td></tr>
<tr><td>10.5</td><td colspan="3">The minimum major equipment requirements are the following:</td></tr>
</table>

	Please refer to Section 8, *Annex 3 Minimum Major Equipment Requirements*
12	*Value Engineering Clause:* **Not Allowed**
15.1	The bid security shall be in the form of a Bid Securing Declaration or any of the following forms and amounts: a. The amount of not less than **₱ 10,754,528.95**, if bid security is in cash, cashier's/manager's check, bank draft/guarantee or irrevocable letter of credit; b. The amount of not less than **₱ 26,886,322.38**, if bid security is in Surety Bond.
16	Each bidder shall submit one (1) original and six (6) copies of the Technical and Financial Proposals, properly labelled, book-bound, with hard cover and corresponding index tabs. Failure to comply with the requirements is a ground for the automatic disqualification of the bidder.
19.2	Partial bids: **Not Allowed**
20	*Other appropriate licenses and permits required:* **None**
21	*Other contract documents are as follows:* *Construction Schedule and S-Curve, Manpower Schedule, Construction Methods, Equipment Utilization Schedule, Construction Safety and Health Program approved by the Department of Labor and Employment and PERT/CPM or other acceptable tools of project scheduling.*

SECTION IV

GENERAL CONDITIONS OF CONTRACT

1. Scope of Contract

This Contract shall include all such items, although not specifically mentioned, that can be reasonably inferred as being required for its completion as if such items were expressly mentioned herein. All the provisions of RA No. 9184 and its 2016 revised IRR, including the Generic Procurement Manual, and associated issuances, constitute the primary source for the terms and conditions of the Contract, and thus, applicable in contract implementation. Herein clauses shall serve as the secondary source for the terms and conditions of the Contract.

This is without prejudice to Sections 74.1 and 74.2 of the 2016 revised IRR of RA No. 9184 allowing the GPPB to amend the IRR, which shall be applied to all procurement activities, the advertisement, posting, or invitation of which were issued after the effectivity of the said amendment.

2. Sectional Completion of Works

If sectional completion is specified in the **Special Conditions of Contract (SCC)**, references in the Conditions of Contract to the Works, the Completion Date, and the Intended Completion Date shall apply to any Section of the Works (other than references to the Completion Date and Intended Completion Date for the whole of the Works).

3. Possession of Site

4.1. The Procuring Entity shall give possession of all or parts of the Site to the Contractor based on the schedule of delivery indicated in the **SCC**, which corresponds to the execution of the Works. If the Contractor suffers delay or incurs cost from failure on the part of the Procuring Entity to give possession in accordance with the terms of this clause, the Procuring Entity's Representative shall give the Contractor a Contract Time Extension and certify such sum as fair to cover the cost incurred, which sum shall be paid by Procuring Entity.

4.2. If possession of a portion is not given by the above date, the Procuring Entity will be deemed to have delayed the start of the relevant activities.

The resulting adjustments in contract time to address such delay may be addressed through contract extension provided under Annex "E" of the 2016 revised IRR of RA No. 9184.

4. The Contractor's Obligations

The Contractor shall employ the key personnel named in the Schedule of Key Personnel indicating their designation, in accordance with **ITB** Clause 10.3 and specified in the **BDS**, to carry out the supervision of the Works.

The Procuring Entity will approve any proposed replacement of key personnel only if their relevant qualifications and abilities are equal to or better than those of the personnel listed in the Schedule.

5. Performance Security

5.1. Within ten (10) calendar days from receipt of the Notice of Award from the Procuring Entity but in no case later than the signing of the contract by both parties, the successful Bidder shall furnish the performance security in any of the forms prescribed in Section 39 of the 2016 revised IRR.

5.2. The Contractor, by entering into the Contract with the Procuring Entity, acknowledges the right of the Procuring Entity to institute action pursuant to RA No. 3688 against any subcontractor be they an individual, firm, partnership, corporation, or association supplying the Contractor with labor, materials and/or equipment for the performance of this Contract.

6. Site Investigation Reports

The Contractor, in preparing the Bid, shall rely on any Site Investigation Reports referred to in the **SCC** supplemented by any information obtained by the Contractor.

7. Warranty

7.1. In case the Contractor fails to undertake the repair works under Section 62.2.2 of the 2016 revised IRR, the Procuring Entity shall forfeit its performance security, subject its property(ies) to attachment or garnishment proceedings, and perpetually disqualify it from participating in any public bidding. All payables of the GOP in his favor shall be offset to recover the costs.

7.2. The warranty against Structural Defects/Failures, except that occasioned-on force majeure, shall cover the period from the date of issuance of the Certificate of Final Acceptance by the Procuring Entity. Specific duration of the warranty is found in the **SCC**.

8. Liability of the Contractor

Subject to additional provisions, if any, set forth in the **SCC**, the Contractor's liability under this Contract shall be as provided by the laws of the Republic of the Philippines.

If the Contractor is a joint venture, all partners to the joint venture shall be jointly and severally liable to the Procuring Entity.

9. Termination for Other Causes

Contract termination shall be initiated in case it is determined prima facie by the Procuring Entity that the Contractor has engaged, before, or during the implementation of the contract, in unlawful deeds and behaviors relative to contract acquisition and implementation, such as, but not limited to corrupt, fraudulent, collusive, coercive, and obstructive practices as stated in **ITB** Clause 4.

10. Dayworks

Subject to the guidelines on Variation Order in Annex "E" of the 2016 revised IRR of RA No. 9184, and if applicable as indicated in the SCC, the Dayworks rates in the Contractor's Bid shall be used for small additional amounts of work only when the Procuring Entity's Representative has given written instructions in advance for additional work to be paid for in that way.

11. Program of Work

11.1. The Contractor shall submit to the Procuring Entity's Representative for approval the said Program of Work showing the general methods, arrangements, order, and timing for all the activities in the Works. The submissions of the Program of Work are indicated in the **SCC.**

11.2. The Contractor shall submit to the Procuring Entity's Representative for approval an updated Program of Work at intervals no longer than the period stated in the **SCC.** If the Contractor does not submit an updated Program of Work within this period, the Procuring Entity's Representative may withhold the amount stated in the **SCC** from the next payment certificate and continue to withhold this amount until the next payment after the date on which the overdue Program of Work has been submitted.

12. Instructions, Inspections and Audits

The Contractor shall permit the GOP or the Procuring Entity to inspect the Contractor's accounts and records relating to the performance of the Contractor and to have them audited by auditors of the GOP or the Procuring Entity, as may be required.

13. Advance Payment

The Procuring Entity shall, upon a written request of the Contractor which shall be submitted as a Contract document, make an advance payment to the Contractor in an amount not exceeding fifteen percent (15%) of the total contract price, to be made in lump sum, or at the most two installments according to a schedule specified in the **SCC**, subject to the requirements in Annex "E" of the 2016 revised IRR of RA No. 9184.

14. Progress Payments

The Contractor may submit a request for payment for Work accomplished. Such requests for payment shall be verified and certified by the Procuring Entity's Representative/Project Engineer. Except as otherwise stipulated in the **SCC**, materials and equipment delivered on the site but not completely put in place shall not be included for payment.

15. Operating and Maintenance Manuals

15.1. If required, the Contractor will provide "as built" Drawings and/or operating and maintenance manuals as specified in the **SCC.**

15.2. If the Contractor does not provide the Drawings and/or manuals by the dates stated above, or they do not receive the Procuring Entity's Representative's approval, the Procuring Entity's Representative may withhold the amount stated in the **SCC** from payments due to the Contractor.

SECTION V

SPECIAL CONDITIONS OF CONTRACT

Special Conditions of Contract

GCC Clause	
2	*Sectional Completion:* **None**
4.1	The Procuring Entity shall give possession of all parts of the Site to the Contractor upon commencement of the project.
6	*Site Investigation Report:* **None**
7.2	*Permanent structures: Fifteen (15) years* Buildings of types 4 and 5 as classified under the National Building Code of the Philippines and other structures made of steel, iron, or concrete which comply with relevant structural codes (e.g., DPWH Standard Specifications), such as, but not limited to, steel/concrete bridges, flyovers, aircraft movement areas, ports, dams, tunnels, filtration and treatment plants, sewerage systems, power plants, transmission and communication towers, railway system, and other similar permanent structures
10	No dayworks are applicable to the contract.
11.1	The Contractor shall submit the Program of Work to the Procuring Entity's Representative within ____ days of delivery of the Notice of Award.
11.2	The amount to be withheld for late submission of an updated Program of Work is _____.
13	The provision on advance payments or mobilization fees in the terms and conditions of all contracts/ purchase orders/ job orders for goods, services and infrastructure projects that will be signed or executed shall henceforth be excluded.
14	No further instructions.
15.1	The date by which operating and maintenance manuals are required is _____. The date by which "as built" drawings are required is _____.
15.2	The amount to be withheld for failing to produce "as built" drawings and/or operating and maintenance manuals by the date required is _____.

SECTION VI

TECHNICAL SPECIFICATIONS

ITEM 01 : DEMOLITION AND REMOVAL WORKS

DESCRIPTION

The work includes the furnishing of all labor, materials and equipment required to carry out the demolition and removal of old structures, port accessories and obstructions including demolition of miscellaneous concrete curbs etc., as required for the execution of the Contract.

The Contractor shall submit the proposed methodology or procedure of demolition work with detailed drawings and calculations, if necessary, to the Engineer for approval, before the execution of the Works.

The Contractor shall keep all pavements and landing areas to and from the site of the disposal area clean and free of mud, dirt and debris during and after the execution of disposal. Disposal of debris and materials shall be as directed by the Engineer.

GENERAL PROVISIONS

1. The Contractor shall be deemed to have satisfied himself of the site conditions, and to have included in his unit prices provision for all risks that may arise during or in connection with the work.

2. The demolition shall be carried out by approved methods and equipment such as concrete breakers, gas-cutters, hydraulic jacks, compressed air disintegrators, etc., however, no blasting shall be used unless approved in writing by the Engineer and after obtaining the written permission of the concerned authorities.

3. The Contractor shall provide suitable equipment, skilled labor and appropriate temporary works such as scaffolding to ensure safety in his demolition works as well as in the adjacent area.

4. Contractor shall demolish all the structural members above the level on which the subsequent and permanent works under this Contract will begin. To this end, the temporary construction works such as excavation shall be conducted by the Contractor.

5. Materials coming from the demolition works, except general earth, shall remain the property of the Procuring Entity, the designated part of which shall be stored by the Contractor at places specified by the Engineer/ Accepting authority. Receiving copy of Turn-Over Report shall be provided.

6. In case of demolition of wharf deck and platform, the contractor shall ensure that no debris will be remained/deposited at seabed.

INTERFERENCE WITH PORT OPERATIONS

During the execution of the work, the Contractor shall not interfere with the shipping, navigation and other traffic in the port.

The Contractor shall make arrangements with the operations people on the schedule of demolition and related works to keep port operation activities undisturbed at all times.

Prior to commencement of the demolition works, the Contractor shall inform/announce to port users the schedule of disconnection of utilities.

STORAGE AND DUMPING

Prior to the commencement of the demolition work, the Engineer shall submit to the Contractor a list in which all the materials are to be salvaged and overhauled, as property of PPA, and the description of the location of their storage. Materials embedded in concrete units shall not be salvaged.

The Contractor shall separate materials to be salvaged from debris. Salvaged materials shall be loaded, transported and unloaded by the Contractor at the specified locations.

The Contractor may dump debris or extracted rocks on land areas but out of the site, which areas shall be procured and prepared at his own expense. In this case, safety measures shall be undertaken in the transporting, unloading, covering and others as requested by the Engineer.

The approximate distance of the disposal site from the project site is about five (5) kms., as designated by the PMO thru the implementing office.

EXECUTION

1. Prior to the commencement of demolition works, the alignment of the new construction works to the existing structure shall be checked.

2. The width and alignment of portion of existing structure to be demolished shall be marked by paint.

3. With these lines as guides, concrete shall be broken and reinforcing bars cut, such that panels or portions of the structure can be lifted out for disposal elsewhere outside of the operational work area.

4. Rocks removed from existing slope protection shall be stored for re-use in new construction.

5. Demolish pavements, curbs, fences, utilities, services, navigation aids and the likes as determined in the field for each project and as shown on the drawings or as directed by the Engineer.

6. Materials coming from the demolition works shall be properly disposed of by the Contractor.

SAFETY

During the course of survey and clearing, any obstacles which are recognized and seemed to be explosive or hazardous to workers shall be removed from the site by the proper Authority.

At the end of each day's work, the Contractor shall keep the workplace in safe condition and clean so that no part is in danger of falling or creating hazard to personnel or equipment.

ITEM 02 : EXCAVATION WORKS

SCOPE OF WORK

General Provisions

1. The area shall be excavated at the *required depth* as indicated on the Drawing/s.

2. The work includes furnishing of all labor, materials, plants and equipment required to complete/finish the excavation works.

Work Schedules

1. After examinations of all relevant data, coordination needs, work constrains, equipment to be used and other matters, a PERT/CPM diagram showing the detailed schedule/duration and sequences for the execution of excavation work shall be submitted to the Engineer for approval within 15 days before the proposed commencement of the Works.

2. Before the commencement of excavation works, the Contractor together with the Authority's Representatives and Surveyors shall conduct a pre-joint hydrographic and topographic survey which will form basis of actual quantity of excavated materials to be removed/excavated.

3. Prior to excavation work, the Contractor shall establish visible markers to clearly define the limits of the excavation.

EQUIPMENT/LAYOUT OF WORK

Plant

1. The Contractor shall keep on the job sufficient equipment/plant to meet the requirements of the project.

2. The equipment/plant shall be in satisfactory operating conditions and capable of efficiently performing the excavation works with safety as set forth herein and shall be subject to inspection by the Engineer at all times.

Physical Data/Layout of Work

1. The Authority does not guarantee to keep the project excavation area free from obstructions.

2. The Contractor shall conduct the work in such manner not to disrupt the port operational activities at all times.

3. The Contractor shall layout his work from the government established ranges and gauges which shall be pointed out to him prior to commencement of the excavation work but shall be responsible for all measurements in connection therewith.

4. The Contractor shall furnish, at his own expense, survey equipment, range markers, poles, buoys, etc., and labor as may be required in laying out any part of the excavation work.

5. The Contractor shall be responsible for the installation, maintenance and preservation of all gauges, ranges, platforms, excavation limit markers. Upon completion of the work, the Contractor shall promptly remove all ranges, markers, and other markers placed by him that may be detrimental to port operation.

EXECUTION

EXCAVATION WORKS

Description

1. This item shall consist of the removal of existing seabed/fill in conformity with the dimensions shown in hydrographic and topographic survey plan or as established by the Engineer.

2. The excavated suitable materials shall be used if proven to pass the requirements as backfilling materials.

3. The excavated good materials shall be stockpiled within the project site to be designated by the Engineer. The good materials shall be used for backfilling as directed by the Engineer.

Progress of Work

1. Upon mobilizing sufficient labors, materials, plants and equipment, the Contractor shall work at such hours as may be necessary, subject to existing laws, to ensure the prosecution of work in accordance with the approved schedule (PERT/CPM). If the Contractor falls behind the approved excavation schedule, the Engineer may require the Contractor to increase the number of shifts and/or equipment without extra cost to the Authority.

2. Failure of the Contractor to comply with the requirements shall be reasonable grounds to assume that the Contractor is not performing the excavation work with such diligence as will ensure completion within the specified time, in which case, the Engineer may be compelled to take steps to protect the interest of the PPA.

3. When the Contractor elects to work overtime and on Sundays and legal holidays, appropriate authority from those concern must be secured and notice of his intention to do so shall be submitted to the Engineer within the reasonable time in advance thereof.

4. The Contractor shall *submit daily excavation reports in duplicate* within two (2) days after the end of the day covered by the report duly signed by the Contractor or his duly authorized representative and the Engineer. The report shall be made in forms and to be provided by the Authority.

5. The Contractor shall take necessary measures to protect the life and health of his men in accordance with the existing laws and regulations of the Government. The Contractor shall provide safety devices to Engineer and personnel while on board the equipment/plant in performance of their official duties.

6. The Contractor shall put up and maintain such markers and buoys as will prevent any accident as a consequence of his excavation work. No liability whatsoever attaches to the Authority, if as a result of the operations or installation, an accident happens in the project area. The Contractor shall hold the Authority free and harmless against any or all claims of persons involve in such accidents.

EXCAVATED MATERIALS

1. Disposal of excavated unsuitable materials from seabed shall be transported and deposited at 10.00 kms. (minimum) away from the area to be excavated.

2. Stockpiling and usage of excavated materials from existing backfill shall be approved by the Engineer in coordination with the Agency.

Displace Materials

1. Should the Contractor, during the progress of the excavation works, lose, dump, throw overboard, sink, misplace any materials, plant, machinery or appliance which may be dangerous to or obstruct navigation and/or port operations activities, the Contractor shall immediately give notice with description and location of such obstruction to the Authority and when required, shall mark the obstruction until such time the same is removed.

2. Should the Contractor refuse, neglect or delay compliance with the above requirements, such obstructions shall be removed by the Authority and the cost of its removal shall be deducted from any money due or to become due to the Contractor or proceeded against his performance bond.

3. Any excavated materials that is deposited other than the designated area will not be paid and the Contractor shall be required to remove such misplaced materials and deposit it to where directed at his expense.

INSPECTION

1. No PPA Project Engineer or Authority's Representative is authorized to change any provisions of the excavation specifications without written authorization of the Authority.

2. Nor shall the presence or absence of a PPA project Engineer or Authority's Representative relieve the Contractor from any of his responsibilities under the Contract.

PAY LIMITS

It is to be clearly understood that no payments will be made for excavation beyond the excavation limits. The Contractor shall bear all the cost of over excavation beyond the project depth and in addition, of any remedial measures ordered by the Authority or its representative to be taken in areas over excavation is not permitted.

SOUNDINGS

1. The Contractor, in the presence or joint with the Authority's Representative and during the progress of the excavation works, shall perform continuous checking of the depth thru soundings.

2. For the purpose of work progress payments; the Contractor, jointly with the Authority's Representative and/or Surveyors, shall conduct soundings on areas subjected to excavation activities during the month or the preceding period for which payment is being claimed.

3. The Contractor will be responsible for all costs involved in the above mentioned such as costs for the survey equipment, measurement, markings, materials and other cost related thereto.

ITEM 03 : PILING WORKS (STEEL SHEET PILE)

SCOPE OF WORK

This section covers the minimum requirements for the fabrication, hauling, spotting, driving and finishing of all sheet piles to be used as containment and berthing wall/wharf.

The Contractor may however, adopt, in addition to these minimum requirements, additional provisions as may be necessary to ensure the successful prosecution of the work related to the said undertaking.

METHOD STATEMENT

Before the commencement of any piling works, the Contractor shall submit (allowing sufficient time for consideration) to the Engineer for approval a Safety Policy and a Method Statement which shall include the following information:

1. Program of Works detailing sequence and timing of individual portions of works.

2. Maximum proposed lead at any stage of driving between a pile and its neighbor and the limitations of same if hard driving is encountered.

3. Contingency plan in the event of encountering obstructions or reaching driving refusal to minimize disruption/delay especially when using pitch and drive methods.

MATERIAL REQUIREMENTS

STEEL SHEET PILES

Steel sheet piles required under this heading shall be in accordance to the required steel grade, sheet pile type (cross section), clutches, and dimensions specified on the plans. The section modulus of sheet pile per meter of wall shall not be less than the required as computed and indicated in the plans.

Steel sheet piles shall be of the type indicated on the drawings with continuous interlock.

Equivalent sheet pile system that equates or exceeded the required capacity may be used subject for approval, verifications and conditions of Engineering Office thru Design Department.

All steel sheet piles shall conform to ASTM A 328 or approved equivalent.

CONCRETE AND DOWEL BARS

Dowel bars shall be as indicated on the plans and the coping wall shall be in accordance with the Section "Reinforced Concrete" where the compressive strength at 28 days shall be 24 mpa (3,500 psi).

TIE - RODS, WAILING and FITTINGS

All components of tie-rod assemblies to be supplied, assembled and installed by the Contractor shall be in accordance with the applicable requirements of the ASTM standards. The tie-rods shall have upset treaded ends and the minimum yield point shall be as shown on the drawings.

Structural steel shapes for wailings shall be supplied, fabricated, assembled and installed by the Contractor as shown on the drawings. The sections and grade of steel shall be as shown on the drawings or approved equivalent.

Bolts for assembly of structural steel wailings and for connections or special sections shall conform to ASTM A 36, A 325, and ASTM A 307 and or as specified on the Drawings.

PROTECTIVE COATING

GENERAL

The following abbreviations and definition of terms are used in this Specification:

DFT	Dry Film Thickness
ISO	International Organization for Standardization
NACE	National Association of Corrosion Engineers
SSPC	Steel Structures Painting Council
µm	Micron
WFT	Wet Film Thickness

Definition of Terms

Company Representative	A duly appointed representative of the facility owner
"Shall"	A mandatory requirement of compliance
Spot Blast	Blasting operations carried out to remove localized corrosion, or damage, to otherwise sound coatings
Stripe Coat	Brush applied coating, usually to edges, welds, and other areas susceptible to coating breakdown
Substrate	Base material over which a protective coating is applied
Whip Blast	Light blasting carried out to abrade a surface, with minimal removal of substrate

CODES, STANDARDS AND TEST METHODS

Materials and workmanship shall comply with any requirements of any Acts or Regulations of any Statutory Authority having jurisdiction over the works. Occupational Health & Safety and Environmental legislations relevant to the works must be adhered to.

Unless noted otherwise, all works shall be performed in accordance with the current version of the relevant global standard / test method (including ASTM, ISO, NACE & SSPC), including (but not limited to) those listed below:

ASTM D4285	Indicating Oil or Water in Compressed Air
ISO 8501	Preparation of steel substrates before application of paints and related products –Visual assessment of surface cleanliness
ISO 8502	Preparation of steel substrates before application of paints and related products – Tests for the assessment of surface cleanliness
ISO 8503	Preparation of steel substrates before application of paints and related products – Surface roughness characteristics of blast-cleaned steel substrates

ISO 8504	Preparation of steel substrates before application of paints and related products – Surface preparation methods
ISO 9000 Series	Quality Management Systems Series
NACE SP0188	Discontinuity (Holiday) Testing of New Protective Coatings on Conductive Substrates
SSPC-SP1	Steel Structures Painting Council (SSPC) – Solvent cleaning
SSPC-SP6	Commercial Blast Cleaning
SSPC-SP10	Steel Structures Painting Council (SSPC) – Near-white blast cleaning
SSPC Vis 1	Steel Structures Painting Council (SSPC) –Visual standard for abrasive blast cleaned steel

WORKMANSHIP

Application

All surface preparation and coating application activities shall be carried out by suitably trained operators,
preferably with a minimum of two years' practical experience with these tasks.

The Contractor shall ensure that the supervision of application staff and all quality inspections are carried out by a suitably qualified specialist with a minimum of 3 years industry experience.

Quality Assurance

The Contractor shall compile appropriate Inspection & Test Plans for each part of the surface preparation and coating application works. These shall be submitted to the Company Representative for approval prior to the works commencing.

The Company Representative reserves the right to appoint a third party to conduct quality inspections of the coatings applied under this Specification. These inspections are in addition to those required by the Contractor. These inspections do not remove any of the Contractor's obligations under this Specification.

Non-Conformances

Any work which does not conform to the requirements of this Specification shall be repaired to the satisfaction of the Company Representative. Such work may include complete removal of the non-conforming coating, surface preparation and application of the new coating system.

Such rectification work will be at the expense of the Contractor.

Work Method

Where possible, surface preparation and coating application shall be performed when all fabrication, including attachment of secondary steelwork and brackets, is complete. Where this is not possible, work method and inspection must ensure all exposed surfaces are treated in accordance with this specification.

Surfaces which are not to be painted shall be protected from damage and overspray. These surfaces include, but are not limited to:

- Stainless steel
- Machined surfaces
- Gauge faces

Access to the Work Surfaces

Access to the work surface must be suitable so as to allow full and proper treatment of all surfaces to be coated under this specification. Scaffolding, if necessary, shall be erected in accordance with local legislative requirements. Care shall be taken to minimize damage to coated surfaces during manipulation of scaffolding / access equipment. Any damage to the applied coating shall be repaired to the full requirement of this specification.

Protection of Environment

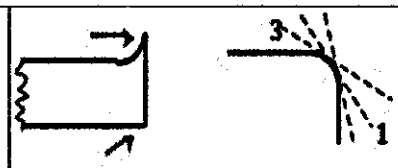
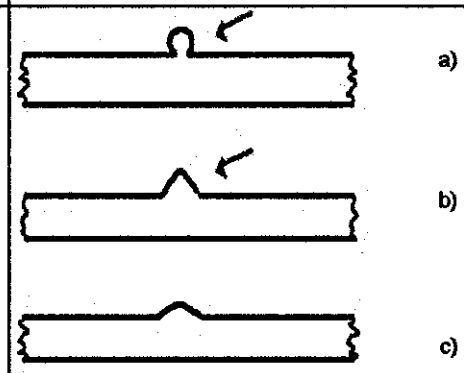




All work carried out under this specification shall be performed in accordance with local legislative and site specific requirements. Care shall be taken to eliminate impact on adjacent work areas from noise, dust, overspray and other activities. Paint, thinners, rags, empty paint cans and other refuge generated shall be disposed of thoughtfully and in accordance with local legislative requirements.

SURFACE PREPARATION

General

Prior to surface preparation activities, the steel surface to be coated shall be thoroughly cleaned to remove all oil, grease, fats, drilling and cutting compounds, and other contaminants in accordance with ISO 8504, or SSPC-SP1. Soluble salts shall be removed by thorough water washing. Where a chloride level of greater than 50 mg/m² (or less if recommended by the protective treatment supplier) as determined by ISO 8502, the substrate shall be wet abrasive blasted, high-pressure water jetted, or otherwise washed, and then reblasted. The substrate shall then be retested for chloride salt contamination, and the cleaning / reblasting process shall be repeated until the chloride level is shown to be less than the required value.

All sharp edges, corners, holes, feathering at saw cuts, or sharp irregularities shall be ground to a minimum radius of 2.0mm, where specified on the project engineering drawing. Burrs, surface shell, slag, weld spatter and other surface defects such as cracks, laminations and slag inclusions shall be repaired before the commencement of blast cleaning activities. Temporary welds shall be ground to a flush finish. Weld porosity and associated defects shall be removed by grinding and repaired/filled with weld. Please see table below for surface imperfections.

SHARP EDGE	Edges should be treated to a rounded radius of minimum 2mm, or subjected to three pass grinding or equivalent.	
WELD SPATTER	1. Remove spatter observed before blasting by grinder, chipping hammeretc. 2. For spatter observed after blasting: a) Remove with chipping hammer /scraper etc. b) Where spatter is sharp, use disc sander or grinder until obtuse c) Obtuse spatter – no treatmentrequired	
PLATE LAMINATION	Any lamination to be removed by grinder ordisc sander	
UNDERCUT	Where undercut is to a depth exceeding 1mm and a width smaller than the depth, repair by welding or grinding may be necessary	
MANUAL WELD	For welding bead with surface irregularity or with excessive sharp edges, remove by discsander or grinder	
GAS CUTSURFACE	For surfaces of excessive irregularity, remove by disc sander or grinder	

Abrasive Blast Cleaning

Blast cleaning operators shall wear approved safety clothes and equipment at all times during the blast cleaning process. Helmets shall meet all required statutory requirements and guidelines.

Work shall NOT be performed in the following circumstances:
•When the relatively humidity of the surrounding air is above 85%.

Unless otherwise stated herein, all surfaces to be coated shall be abrasive blast cleaned to Sa2½ (in accordance with ISO 8501-1); or in accordance with SSPC-SP10.

Unless otherwise stated herein, a surface profile of 50-75 microns (2 - 3 mil) shall be achieved as measured by ISO 8503. The resultant surface shall have a sharp angular profile.

The use of silica sand, flint, or ilmenite abrasives shall NOT be permitted. Steel shot alone shall not be used but a mix of steel shot and grit may be used.

The type and size of abrasive, the equipment and the procedure adopted shall be chosen to ensure the required degree of cleanliness and surface profile is achieved. The blasting medium shall be free of organic material and shall have a chloride salt content not greater than 50 ppm. The compressed air supply used for blasting shall be completely free of water and oil. The design of the compressed air system shall incorporate the appropriate number of serviceable in-line separators and traps which shall be cleaned and drained on a regular basis.

Care shall be exercised to ensure spent blast media does not impinge onto soft or freshly applied coating when blast cleaning in close proximities (e.g. on-site repair).

Welding spatter, slivers, surface shell, cracks, lamination, deep pitting and other surface defects detrimental to the performance of the protective coating system exposed by the blast cleaning process shall be removed by grinding or other approved method. Where necessary these defects shall be welded closed after grinding, and the repair ground to blend in with the adjacent surface. The repair area shall be re-blasted to re-establish the correct surface condition.

Immediately after completion of the blast cleaning process, the surface shall be dusted, vacuumed or blown down with clean dry compressed air to remove spent abrasive. Special attention shall be given to corners, intersects and horizontal areas where settlement of dust is likely to occur.

Where site abrasive blasting is required over water, preventative measures shall be employed to protect the environment from contamination by spent abrasive and blast debris. All used blast materials shall be disposed off-site in a statutory approved dumping facility.

Power Tool Cleaning (for small areas/ repair only)

Power Tool cleaning operators shall wear approved safety clothes and equipment at all times during the power tool cleaning process.

Work shall NOT be performed in the following circumstances:
- If the surface is wet, or likely to become wet after power tool and before primer application.
- On surface where the formation of condensation is likely i.e. where the surface temperature of steel is less than 3°C above dew point.
- When the relatively humidity of the surrounding air is above 85%.

Unless otherwise stated herein, all carbon steel surfaces shall be power tool cleaned using an orbital sander with cup brush followed with disc sanding pad (flap disc) having grit size ideally ranging from 80- 120, to create profile (roughness). Care should be exercised so as to not over grind the carbon steel. The objective is to leave the metal bare and generate surface profile. A bare metal power-tool cleaned surface, when viewed without magnification, shall be free of all visible oil, grease, dirt, rust, coating, oxides, mill scale, corrosion products, and other foreign material, Slight residues of rust and coating are permitted to remain in the lower portions of pits if the original surface is pitted. Acceptable variations in appearance that do not affect surface cleanliness as defined earlier include variations caused by type of steel, original surface condition, thickness of the steel, weld metal, mill or fabrication marks, heat treating, heat-affected zones, or the texture/features associated with the use of a particular power tool.

Immediately after completion of the power tool cleaning process, the surface shall be dusted, vacuumed or blown down with clean dry compressed air to remove debris from removed coatings, corrosion etc. Special attention shall be given to corners, intersects and horizontal areas where settlement of dust is likely to occur.

Care of Prepared Surfaces

The application of the prime coat to the prepared surface shall commence within four (4) hours of the commencement of the blasting process, and before any deterioration of the prepared surface occurs. The time lapse between blasting and primer application shall be recorded on the Contractor's Inspection report forms.

Blast cleaned surfaces shall be kept free of any contamination and shall not be touched by bare hands or contaminated gloves.

Any prepared surface which becomes contaminated shall be re-blasted to the specified visual condition above.

APPLICATION OF COATINGS

General

Coating application operators shall wear approved safety clothes and equipment at all times during the blast cleaning process. Respirators and associated equipment shall meet all required statutory requirements and guidelines.

Work shall NOT be performed in the following circumstances:
- If the surface is wet, or likely to become wet after blasting and before primer application.
- On surface where the formation of condensation is likely i.e. where the surface temperature of steel is less than 3°C above dew point.
- When the relatively humidity of the surrounding air is above 85%.
- When the ambient temperature, or the surface temperature, exceeds 50°C or is less than 5°C.

Immediately prior to paint application, the surface shall be dusted, vacuumed or blown down with clean dry compressed air to remove spent abrasive. Special attention shall be given to intersects and horizontal areas where settlement of dust is likely to occur.

Each coat shall be free of sags, runs, mud cracking, wrinkling, fat edges, blisters, pinholes, holidays, dry spray, entrapped foreign bodies, heavy brush marks and other similar defects consistent with a finish for industrial applications. Prior to the commencement of work, the Contractor shall produce a "reference area" for approval by the Company Representative. The reference area shall be representative of the type of surfaces being treated. Once approved by the Company Representative the reference area shall be used to determine acceptable finish quality.

All ventilation equipment required during application shall be left operating until cure of the applied coating is achieved.

Adhesion of all coats shall be sound throughout. Coatings with poor adhesion shall be removed and re- instated at the cost of the Contractor.

The Contractor acknowledges that variations in weather conditions affects minimum and maximum recoat times of coating material, and that this is taken into account when planning coating operations.

Materials

All primers and final coat shall be of the approved make, type and colour. All coats in the system applied shall be from coating manufacturer only.

Where two component paint is used, it shall be mixed at the site of application in the manner prescribed by the coating manufacturer. Mixed paint remaining unused after the coating manufacturer's prescribed pot life shall be discarded and removed from the site of application.

All colouring or tinting of paint shall be performed by the coating manufacturer.
Stripe Coating

All external edges shall be stripe coated (either spray or brush) prior to spray application of the full coat. All welds, crevices, holes, corners, and other difficult access areas shall be stripe coated by brush painted prior to spray application of the full coat. All nuts and bolts which have been specified to be painted, or which the Company Representative has instructed to be painted, shall be brush painted prior to spray application of the full coat. This process shall be repeated where necessary to ensure the correct film thickness is achieved over these areas.

Brush and Roller Application

Application by brush or roller shall be limited to small areas only. Multiple application of each coat in the system will be required to achieve the required dry film thickness. A uniform method of application shall be adopted when painting large areas. The application direction shall be towards already painted areas so as to maintain a wet edge and minimize paint joint buildup.

The paint shall be spread evenly over the entire area with the minimum practical amount of brushing. The method of application and type of brush used shall be suitable to the paint specified and the surface being painted.

The method of "laying off" shall be suitable to the paint specified and shall be executed with the minimum amount of brush marking.

Measurement of Film Thickness

Irrespective of the method of application, the Contractor shall ensure that frequent measurements of wet film thickness are taken throughout the application process. An approved wet film gauge shall be used. The level of thinner additional shall be taken into account when measuring wet film thickness to ensure the correct dry film thickness is achieved.

After each coating has cured, the dry film thickness shall be tested and recorded by the Contractor. Inspection regime and acceptance of results shall be in accordance with ISO 2808.

The minimum dry film thickness considered acceptable is that specified within the given coating system, where the measurement has been determined according to the rules in ISO 2808.

The maximum dry film thickness considered acceptable is dependent on products and systems being applied and should be determined in consultation with the coating manufacturer.

Multiple Coat Applications

The existing surface shall be treated in accordance with Section General of the Application of Coatings of this Specification. Ensure the previously coated surface is free of water, moisture, dust and dirt immediately prior to application of the successive coat.

Successive coats shall be applied only under the following conditions:
- The surface is clean and dry.
- The coating manufacturer's stated minimum recoat time has elapsed, and the maximum recoat time has not been exceeded. If the maximum recoat time has been exceeded, then pre-treatment of the surface shall be in accordance with the coating manufacturer's recommendation.
- Damaged and non-conforming areas in the previous coating have been made good.

Transport and Handling

Particular care shall be taken to avoid damage to coatings in handling and transport. Coated items shall not be handled until the coating has cured in accordance with the manufacturer's instructions. Coated items shall be handled and transported in a manner that will not chip, abrade or otherwise damage the finished coatings. All slings, lifting devices, dunnage, packing, tie-downs, and the like, shall be of a type that is designed to achieve this end.

No sign writing, stenciling, or marking whatsoever shall be applied to painted surfaces of plant, machinery and equipment unless specifically approved by the Company Representative. Such markings shall be compatible with the specified coating system.

Rectification and Touch-up Painting

Surfaces where the paint coating has been damaged or marked in any way shall be touched up or repainted in accordance with the coating manufacturer's instructions, this Specification, and as otherwise approved by the Company Representative. Repairs performed after installation require special attention to ensure blast media, paint overspray, fumes and other contaminants, do not affect adjacent work areas.

The treatment shall be:
• Pre-clean the damaged area in accordance with Section General of Surface Preparation on this Specification.
• Remove the damaged coating back to a sound adherent surface in accordance with Section Abrasive Blast Cleaning of Surface Preparation on this Specification.
• Spot abrasive blast clean the damaged area
• Feather back the repair area by a minimum 50mm overlap by sanding or sweep blasting.
• Clean surface to remove dust.
• Build up the repair area using the same type of paints and same dry film thickness as were originally specified in the appropriate section of this Specification.

INSPECTION AND TESTING

Initial Inspection

The procedure associated with the surface preparation and application of each coating shall, in the first instance, be carried out in the presence of the Contractor's site supervisor, the Company Representative or any other technical representative.

Once the procedure for each stage of the operation has been witnessed and approved, these procedures shall then apply to all similar operations unless subsequently varied by the Company Representative. Work subsequently identified as being carried out using procedures not previously approved shall be rejected or improved at the sole discretion of the Company Representative.
The Contractor shall give the Company Representative a minimum of five (5) working days' notice of the intention to paint the steel work.

Contractor Inspection

The Contractor shall ensure that all work is inspected, and appropriate testing carried out progressively to ensure that it is in accordance with the specified requirements. Inspection and testing records shall be maintained on a daily basis. As a minimum, these reports shall include appropriate information concerning the following:

- Job identification;
- Surface preparation performed and equipment used;

- Surface profile measurement;
- Coating applied and equipment used;
- Material used, batch number, colour, mix ratio and thinner;
- Application details including which coat was applied, wet film thickness and dry film thickness of each coat;
- Weather conditions including air temperature, surface temperature, relative humidity, dew point, wind conditions and general weather conditions. These measurements shall be taken immediately prior to surface preparation and application work, and then every four (4) hours, or whenever a change in the weather conditions is apparent.

Inspection & Test Plans (ITP) shall be compiled and submitted to the Company Representative prior to any work commencing. In addition, the Contractors facility and inspection records shall be made available to the Company Representative for inspection of the works at any time during the performance of the contract.

Inspection by Company Representative

Steelwork will be inspected by the Company Representative at each stage of the coating operation in this case, after surface preparation, prior to application of each coat, and following final topcoat application. Additional inspection will also be conducted after any touch up coats that may be required.

The Company Representative may, at their discretion, vary the frequency of inspection. This may involve the waiver of inspection for a specific step in the operation. Such a waiver shall not be deemed as the precedent to determine the frequency of any future inspection.

Inspection performed by the Company Representative, as well as any waiver of inspection, shall not relieve the Contractor of the obligation to perform their own supervision and inspection of surface preparation and coating application operations as required by this Specification.

Test Methods

The following, but not limited to, test methods shall be used for inspection of the surface preparation and coating application operations:

Compressed Air Quality

Prior to using compressed air, the quality of air downstream of the separator shall be tested in accordance with ASTM D4285. The test shall be performed at the beginning of each shift and at four (4) hourly intervals. The test also shall be made after any interruption of the air compressor operation or as required by the Company Representative. The air shall be used only if the blotter test indicates no visible contamination, oil, or moisture. If contaminants are evident, the equipment deficiencies shall be corrected and the air stream shall be retested. Separators shall be bled continuously. All lines shall be tested individually prior to use. Surfaces which are determined to have been blasted, blown down, or applied using contaminated air shall be re- cleaned to remove oil, grease, and contaminants and new coatings applied using clean air.

Surface Profile

Surface profile shall be tested after every blasting operation. Surface profile shall be measured in accordance with ISO 8503. The tape shall be included in the test reports for future reference.

Salt Contamination Test (Surface)

Surface Salt Contamination Test on surface shall be tested after every blasting operation. Test method in accordance with ISO 8502-6 and 9 results shall be recorded, value shall be 10 micrograms/cm2 or below.

Dust Assessment Test

Dust contamination on substrate prior to application of primer and subsequent coats shall be tested in accordance with ISO8502-3, dust quantity must be less than or equal to Class 2 of ISO 8502-3 Dust Quantity Rating. Test results shall be included in the test reports for future reference.

Wet Film Thickness

Wet film thickness shall be tested during the application operation of all coats in any given coating system. Wet film thickness shall be measured in accordance with ISO 2808.

Dry Film Thickness

Dry film thickness shall be tested following application of each coat within the system, and following application of the final coat. Dry film thickness shall be measured in accordance with ISO 2808. An electronic gauge (Elcometer 345 or similar) shall be used. Calibration of the gauge shall be performed weekly or as required using certified calibration plates. Refer Section 8.6 for acceptance criteria details.

Continuity "Holiday" Testing

Steelwork shall be fully tested for holidays and pinholes. Since thickness is more than 500 microns, High Voltage (Spark) Holiday Test based on NACE SP0188-2006 Discontinuity (Holiday) Testing of New Protective Coatings on Conductive Substrates shall be used.

PROTECTIVE COATING SYSTEMS

	Product Name	Coat Type	Site OR Shop	Application Method	VS %	WFT micron	DFT micron	TSR*1 m2/l	Overcoating Interval at 25C Min - Max	Pot Life at 25C	Thinner
1	Interzone 954 Subsea, Abrasion Resistant and Splash Zone -Modified Epoxy	Full Coat	Shop/ site	Airless Spray, Brush, Roller	85	471	400	1.7	5.5 Hr - 7 D	45 Mir	GTA220
2	Interzone 954 Subsea, Abrasion Resistant and Splash Zone -Modified Epoxy	Full Coat	Shop/ site	Airless Spray, Brush, Roller	85	471	400	1.7	5.5 Hr - 7 D	45 Mir	GTA220
							800				

TSR*1 – Theoretical Spreading Rate.

WELDING REQUIREMENTS

Welding works shall be in accordance to AWSD9.1.

EXECUTION

MARKING

The pile shall be marked on with durable paint indicating:

1. Serial Number, marked close to both ends
2. Date of Arrival, marked same as (1)
3. Length of pile, marked same as (1)
4. Meters mark in two faces, throughout the length

DOCUMENTS TO BE SUBMITTED

1. Steel Pipe manufacturing plan (Steel pipe production plan, welding method, welding material, production location, production method, transportation, etc.)
2. Design plan
3. Manufacturing process
4. Shipment method and stacking plan
5. Steel pipe inspection certificate
6. Size inspection record
7. Radiographic Test record

STEEL SHEET PILES

The Contractor shall submit to the Engineer three (3) copies of test reports by the approved steel mill certifying that the steel sheet pile meets the requirements specified in these technical specifications.

TIE-ROD AND ANCHORAGE

The tie-rod assembly shall be horizontally aligned to the required degrees, unbending and tight all throughout its length thru the anchorage.

Placed adequate filling materials/rocks/false-work behind the anchorage system to counter the forces applied during back-filling works.

The required spacing of tie-rod are maximum while the required lengths are minimum.

Embedment of tie-rod shall not be less than 1.50m.

REINFORCED CONCRETE

The requirements regarding testing of concrete and reinforcement used in the reinforced concrete piles and sheet piles shall be in accordance with Section "Reinforced Concrete".

STORAGE AND HANDLING

1. Piles may be stored in open air but on wooden sleepers to be placed in a manner so as not to cause excessive bending.

2. All piles shall be carefully lifted at the location of the lifting points as indicated in the Drawings. Other practical and convenient methods may be used subject to the approval of the Engineer.

DRIVING OF PILES

A diesel or hydraulic pile hammer shall be used for driving the steel pipe piles.

The required weight of ram for the diesel or hydraulic pile hammer ranges from 2.5 to 3.5 tons or at least 25% (1/4) of the weight of longest pile.

Piles driven shall be held firmly in position in axial alignment with the hammer by means of leads of adequate length. Approved cushions shall be provided to the pile butts.

BEARING POWER OF PILES

Each pile shall be driven to attain not less than the required minimum bearing power shown in the pile schedule, as determined by the Hiley's Formula as follows:

For Diesel Pile Hammer : $$R = \frac{1}{6} \times \frac{2WH}{S + 2.54}$$

where : R = allowable bearing capacity of pile (tf)

W = weight of ram (tf)

H = fall of ram (cm)

S = set (cm)

In case of the use of hydraulic pile hammer, the computed minimum bearing power shall be submitted to the Port Planning and Design Department (PPDD) and shall be evaluated and approved by the Designing Engineer.

DRIVING RECORDS

The Contractor shall keep complete and accurate piling records. Two (2) signed copies of these records shall be submitted to the Engineer not more than 48 hours from the date of works detailed therein. The pile records shall always be submitted with sufficient time for the Engineer's approval.

The records shall contain the following information:

1. Pile reference number

2. Pile type and Steel Grade

3. Pile Length

4. Commencing surface level and final toe level

5. Depth driven, time, date when piles were driven

6. Where required the number of blows to drive each 250 mm over the last 2.5 meter shall be recorded

7. Comments regarding unusual/unexpected driving conditions

INTERRUPTED DRIVING

When driving is stopped before final penetration is reached and/or refusal is attained, the record of pile penetration shall be taken only after a minimum of 30 cm. (12 in.) total penetration has been obtained on resumption of driving.

DAMAGED AND MISDRIVEN PILES

Any pile damaged by improper driving or driven out of its proper location, or driven out of elevation fixed on the plans, shall be corrected correspondingly at the Contractor's expense.

The method to be adopted shall be at the discretion of the Engineer and approved by the Authority.

ITEM 04 : REINFORCED CONCRETE

SCOPE OF WORK

All works falling under this Section shall include reinforced concrete for all kinds and parts of any reinforced concrete structure.

GENERAL PROVISIONS

1. Full cooperation shall be given to the other trades to install embedded items. Suitable templates or instructions will be provided for setting, items shall have been inspected, and tests for concrete or other materials or for mechanical operations shall have been completed and approved.

2. The following publications of the issues listed below, but referred to thereafter by basic designation only, form as an integral part of this Specification to the extent indicated by the reference thereto:

   a. American Concrete Institute (ACI) Standards:

ACI 117	Standard Specifications for Tolerances for Concrete Construction and Materials
ACI 121R	Quality Management System for Concrete Construction
ACI 201.2R	Guide to Durable Concrete
ACI 211.1	Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete
ACI 214R	Recommended Practice for Evaluation of Strength Test Results of Concrete
ACI 301	Specifications for Structural Concrete
ACI 304.2R	Placing Concrete by Pumping Methods
ACI 304R	Guide for Measuring, Mixing, Transporting, and Placing Concrete
ACI 305R	Hot Weather Concreting
ACI 306.1	Standard Specification for Cold Weather Concreting
ACI 308R	Guide to Curing Concrete
ACI 309R	Guide for Consolidation of Concrete
ACI 311.4R	Guide for Concrete Inspection
ACI 318M	Metric Building Code Requirements for Structural Concrete and Commentary

ACI 347 Guide to Formwork for Concrete

ACI SP-15 Field Reference Manual: Standard Specifications for Structural Concrete with Selected ACI and ASTM References

ACI SP-2 ACI Manual of Concrete Inspection

b. American Society for Testing and Materials (ASTM) Publications:

ASTM C 150 Standard Specification for Portland Cement

ASTM C 114 Standard Method for Chemical Analysis of Hydraulic Cement

ASTM C 185 Standard Method for Air Content of Hydraulic Cement

ASTM C 115 Standard Test Method for Fineness of Portland Cement by the Turbidimeter

ASTM C 204 Standard Test Method for Fineness of Hydraulic Cement by Air-Permeability Apparatus

ASTM C 151 Standard Test Method for Autoclave Expansion of Portland Cement

ASTM C 109 Standard Test Method for Compressive Strength of Hydraulic Cement Mortars

ASTM C 266 Standard Test Method for Time of Setting of Hydraulic-Cement Paste Gilmore Needles

ASTM C 191 Standard Test Method of Time Setting of Hydraulic Cement by Vicat Needle

ASTM C 33 Standard Specification for Concrete Aggregates

ASTM C 136 Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates

ASTM C 117 Standard Test Method for Materials Finer than 75 micron (No. 200) Sieve in Mineral Aggregates by Washing

ASTM C 29 Standard Test Method for Bulk Density (Unit Weight") and Voids in Aggregate

ASTM C 128 Standard Test Method for Density, Relative Density (Specific Gravity), and Absorption of Fine Aggregates

ASTM C 87 Standard Test Method for Effect of Organic Impurities in Fine Aggregate on Strength of Mortar

ASTM C 88 Standard Test Method for Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate

ASTM C 142	Standard Test Method for Clay Lumps and Friable Particles in Aggregates
ASTM C 97	Standard Test Method for Absorption and Bulk Specific Gravity of Dimension Stone
ASTM C 127	Test Method for Specific Gravity and Absorption of Coarse Aggregate
ASTM C 535	Standard Test Method for Resistance to Degradation of Large-Size Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C 88	Standard Test Method for Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate
ASTM C 131	Test Method for Resistance to Degradation of Small-size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C 94	Standard Specification for Ready-Mixed Concrete
ASTM D 512	Chloride Ion in Water
ASTM D 516	Sulfate Ion in Water
ASTM A 615	Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
ASTM A 370	Standard Test Methods and Definitions for Mechanical Testing of Steel Products
ASTM A 510	Standard Specification for General Requirements for Wire Rods and Coarse Round Wire, Carbon Steel
ASTM A 6	Standard Specification for General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling
ASTM C 31	Standard Practice for Making and Curing Concrete Test Specimens in the Field
ASTM C 39	Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens
ASTM C 172	Standard Practice for Sampling Freshly Mixed Concrete
ASTM C 192	Standard Practice for Making and Curing Concrete Test Specimens in the Laboratory
ASTM C 293	Standard Test Method for Flexural Strength of Concrete (Using Simple Beam with Center-Point Loading)
ASTM C 78	Standard Test Method for Flexural Strength of Concrete (Using Simple Beam with Third-Point Loading)
ASTM C 42	Standard Test Method for Obtaining and Testing Drilled Cores and Sawed Beams of Concrete

ASTM C 174 Standard Test Method for Measuring Thickness of Concrete Elements Using Drilled Concrete Cores

ASTM C 143 Standard Test Method for Slump of Hydraulic-Cement Concrete

ASTM C 494 Standard Specification for Chemical Admixtures for Concrete

ASTM C 1017 Standard Specification for Chemical Admixtures for use in Producing Flowing Concrete

ASTM C 171 Standard Specification for Sheet Materials for Curing Concrete

ASTM C 309 Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete

ASTM 5329 Standard Test Methods for Sealants and Fillers, Hot Applied, For Joints and Cracks in Asphaltic and Portland Cement Concrete Pavements

ASTM D 5167 Standard Practice for Melting of Hot Applied Joint and Crack Sealant and Filler for Evaluation

ASTM A 706 Standard Specification for Low-Alloy Steel Deformed and Plain Bars for Concrete Reinforcement

ASTM A 966 Standard Test Method for Magnetic Particle Examination of Steel Forgings using Alternating Current

ASTM C 1064 Standard Test Method for Temperature of Freshly Mixed Hydraulic-Cement Concrete

ASTM C 1077 Standard Practice for Laboratories Testing Concrete and Concrete Aggregates for use in Construction and Criteria for Laboratory Evaluation

ASTM C 1107 Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)

ASTM C 1116 Standard Specification for Fiber-Reinforced Concrete

ASTM C 1157 Standard Specification for Hydraulic Cement

ASTM C 138 Standard Test Method for Density ("Unit Weight"), Yield, and Air Content (Gravimetric) of Concrete

ASTM C 173 Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method

ASTM C 260 Standard Specification for Air-Entraining Admixtures for Concrete

ASTM C 295 Petrographic Examination of Aggregates for Concrete

ASTM C 33 Standard Specification for Concrete Aggregates

ASTM C 42 Standard Test Method for Obtaining and Test Drilled cores and Sawed Beams of Concrete

ASTM C 469 Static Modulus of Elasticity and Poisson's Ratio of Concrete in Compression

ASTM C 595 Standard Specification for Blended Hydraulic Cements

ASTM C1116 Standard Specification for Fiber-Reinforced Concrete and Shotcrete

ASTM C 1751 Preformed Expansion Joint Fillers for Concrete Paving and Structural Construction. (Non-extruding and Resilient Bituminous Types).

ASTM D 1179 Fluoride Ion in Water

ASTM D 1190 Standard Specification for Concrete Joint Sealer, Hot-Applied Elastic Type

ASTM D 1751 Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Non-extruding and Resilient Bituminous Types)

ASTM E 329 Standard Specification for Agencies Engaged in the Testing and/ or Inspection of Materials used in Construction

c. American Welding Society (AWS)

D 12 Welding Reinforcing Steel, Metal Inserts and Connections in Reinforced Concrete Construction.

d. Philippine National Standard (PNS)

PNS 49 Steel Bars for Concrete Reinforcement

e. DPWH Standard Specifications

e. All other standards hereinafter indicated.

f. The edition or the revised version of such codes and standards current at the date twenty-eight (28) days prior to date of bid submission shall apply. During Contract execution, any changes in such codes and standards shall be applied after approval by the Owner.

SUBMITTALS

1. Test Reports and Certificates shall be furnished, and approval received before delivery of certified or tested materials to the Project Sites.

a. Submit Test Reports for the following:

a.1 Concrete mixture proportions

Submit copies of test reports by independent test labs conforming to ASTM C 1077 showing that the mixture has been successfully tested to produce concrete with the properties specified and that mixture will be

suitable for the job conditions. Test reports shall be submitted along with the concrete mixture proportions. Obtain approval before concrete placement. Fully describe the processes and methodology whereby mixture proportions were developed and tested and how proportions will be adjusted during progress of the work to achieve, as closely as possible, the designated levels of relevant properties.

a.2 Aggregates

Submit test results for aggregate quality in accordance with ASTM C 33. Where there is potential for alkali-silica reaction, provide results of tests conducted in accordance with ASTM C 227 or ASTM C 1260. Submit results of all tests during progress of the work in tabular and graphical form as noted above, describing the cumulative combined aggregate grading and the percent of the combined aggregate retained on each sieve.

a.3 Admixtures

Submit test results in accordance with ASTM C 494 and ASTM C 1017 for concrete admixtures, ASTM C 260 for air-entraining agent, and manufacturer's literature and test reports for corrosion inhibitor and anti-washout admixture. Submitted data shall be based upon tests performed within 6 months of submittal.

a.4 Cement

Submit test results in accordance with ASTM C 150 Portland cement. Submit current mil data.

a.5 Water

Submit test results in accordance with ASTM D 512 and ASTM D 516.

b. Submit Certificates for the following:

b.1 Curing concrete elements

Submit proposed materials and methods for curing concrete elements.

b.2 Form removal schedule

Submit proposed materials and methods for curing concrete elements.

b.3 Concrete placement and compaction

Submit technical literature for equipment and methods proposed for use in placing concrete. Include pumping or conveying equipment including type, size and material for pipe, valve characteristics, and the maximum length and height concrete will be pumped. No adjustments shall be made to the mixture design to facilitate pumping.

Submit technical literature for equipment and methods proposed for vibrating and compacting concrete. Submittal shall include technical literature describing the equipment including vibrator diameter, length, frequency, amplitude, centrifugal force, and manufacturer's description of the radius of influence under load. Where flat work is to be cast, provide similar information relative to the proposed compacting screed or other method to ensure dense placement.

b.4 Mixture designs

Provide a detailed report of materials and methods used, test results, and the field test strength (fcr) for marine concrete required to meet durability requirements.

2. The Contractor shall submit shop drawings and erection drawings for formwork and scaffolding at least 14 days prior to commencing the work.

Each shop drawing and erection drawing shall bear the signature of a Contractor's qualified Engineer. Details of all proposed formwork to be prefabricated and formwork to produce special finishes shall be submitted to the Engineer for approval before any materials are ordered. If the Engineer so requires, samples of proposed formworks shall be constructed, and concrete placed at the Contractor's expense so that the proposed methods and finished effect can be demonstrated.

The Contractor shall submit shop drawings showing reinforcing bar placing and bar lists for the Engineer's approval. Such shop drawings shall show also supplemental bars for forming, strengthening frames of bars of sufficient rigidity to withstand forces during placing concrete. If necessary, shaped steel may be added to improve rigidity of the frame of bar.

Such shop drawings shall clearly indicate bar sizes, spacing, location and quantities of reinforcement, mesh, chairs, spacers and other details to be as per ACI Manual of Standard Practice for Detailing Reinforced Concrete Structures.

Details shall be prepared for placement of reinforcement where special conditions occur, including most congested areas and connection between pre-cast concrete and concrete in-situ.

All shop drawings shall be reviewed by the Engineer within seven (7) days after receiving them. At least two (2) days prior to pouring concrete, the Contractor shall submit to the Engineer a pouring permit for his inspection and approval.

MATERIAL REQUIREMENTS

CEMENT

Unless otherwise specified in the Drawings, only one (1) brand of cement shall be used for any individual structure. In determining the approved mix, only Portland cement shall be used as the cementitious material.

1. Portland Cement: ASTM C 150

Type I (for general use in construction)

ADMIXTURE (IF NECESSARY)

Unless otherwise required by field conditions, admixture may be used subject to the expressed approval of the Engineer. The cost of which shall already be included in the unit cost bid of the Contractor for the concrete.

1. Air Entraining Admixture shall conform to ASTM C 260.
2. Admixture other than air entraining agent shall conform to ASTM C 494.
3. Admixture containing chloride ions, or other ions producing deleterious effect shall not be used.

AGGREGATES

1. Crushed Coarse Aggregate

Conforming to ASTM C 33 and having nominal sizes passing 38.0 mm to 19.0 mm, 19.0 mm to 9.5 mm to No. 4 sieve. The material shall be well graded between the limits indicated and individually stockpiled. It shall be the Contractor's responsibility to blend the materials to meet the gradation requirements for various types of concrete as specified herein.

Nominal sizes for combined gradation shall be as follows:

ASTM Sieves	Nominal Size of Coarse Aggregates			
	% by Weight Passing			
	40mm	25mm	19mm	10mm
50.0mm (2")	100	-	-	-
38.0mm (1 1/2")	95 - 100	100	-	-
31.8mm (1 1/4")	-	90 - 100	100	-
25.0mm (1")	-	-	90 - 100	-
19.0mm (3/4")	35 - 70	25 - 90	-	100
16.0mm (5/8")	-	-	20 - 55	85 - 100
9.5mm (3/8")	10 - 30	0 - 10	0 - 10	0 - 20
No. 4	0 - 5			

2. Fine Aggregate

ASTM C 33 except for gradation which has been revised to meet local conditions unless otherwise required by the Engineer, grading of find aggregate shall be as follows:

ASTM Sieves	% by Weight Passing
9.5mm (3/8")	100
No.4	90 - 100
No. 8	80 - 100
No. 16	50 - 90
No. 30	25 - 60
No. 50	5 - 30
No. 100	0 - 10

a. Grading of fine aggregates shall be reasonably uniform and fineness modulus thereof shall not vary more than 0.2 from that of the representative sample in which mix proportions of concrete are based.

b. Due care shall be taken to prevent segregation.

WATER

The mixing water shall be clear and apparently clean. If it contains quantities or substances that discolor it or make it smell or taste unusual or objectionable, or cause suspicion, it shall not be used unless service records of concrete made with it (or other information) indicated that it is not injurious to the quality, shall be subject to the acceptance criteria as shown in Table 6.3 and Table 6.4 or as designated by the purchaser.

When wash water is permitted, the producer will provide satisfactory proof or data of non-detrimental effects if potentially reactive aggregates are to be used. Use of wash water will be discontinued if undesirable reactions with admixtures or aggregates occur.

Table 6.3 Acceptance Criteria for Questionable Water Supplies

Test	Limits
Compressive strength, min. % Control at 7 days	90
Time of Setting deviation from control	from 1:00 earlier to 1:30 later
Time of Setting (Gillmore Test) Initial Final Set	 No marked change No marked change
Appearance	Clear
Color	Colorless

Odor	Odorless
Total Solids	500 parts/million max.
PH value	4.5 to 8.5

Table 6.4 Chemical Limitation for Wash Water

	Limits
Chemical Requirements, Minimum Concentration Chloride as $Cl^{(-1)}$ expressed as a mass percent of cement when added to the $Cl^{(-1)}$ in the other components of the concrete mixtures shall not exceed the following levels:	
1. Prestressed Concrete	0.06 percent
2. Conventionally reinforced concrete in a moist environment and exposed to chloride	0.10 percent
3. Conventionally reinforced concrete in a moist environment but not exposed to chloride	0.15 percent
4. Above ground building construction where the concrete will stay dry	No limit for corrosion
Sulfate as SO_4, ppm[A]	3,000
Alkalies as (Na_2O + 0.658 K_2O), ppm	600
Total Solids, ppm	50,000

Wash water reused as mixing water in concrete may exceed the listed concentrations of sulfate if it can be shown that the concentration calculated in the total mixing water, including mixing water on the aggregate and other sources, does not exceed that stated limits.

Water will be tested in accordance with and shall meet the suggested requirements of AASHTO T 26.

Water known to be of potable quality may be used without test.

CURING MATERIALS

1. Impervious Sheet Materials

   ASTM C 171 type, optional, except that polyethylene film, if used, shall be white opaque.

2. Burlap of commercial quality, non-staining type, consisting of 2 layers minimum.

3. Membrane Forming Curing Compound

   ASTM C 309; submit evidence that product conforms to specifications.

JOINTING MATERIALS

1. Sealant

   Sealant shall be multi-component, polyurethane base compound, gray in color, self-leveling for horizontal joints, 2-part polythremdyne, terpolymer compound, gray in color; non-sag for vertical joints.

   Sealant shall be compatible with materials in contact and to perform satisfactorily under salt water and traffic conditions and be capable of making joint watertight and allow movement 25% of the width of joint in any direction.

   Sealant shall be guaranteed against leakage, cracking, crumbling, melting, shrinkage, running, loss of adhesion for a period of five years from the date of acceptance of work.

2. Joint backing shall be expanded extruded polyethylene, low density, oval in shape to fit the joints as indicated on the drawings and to be compatible with sealant.

3. Where required, primer shall be compatible with joint materials and installed in accordance with manufacturer's instructions.

4. Joint filler shall conform to ASTM D1751 (AASHTO M213) non-extruding, resilient bituminous type. Filler shall be furnished for each joint in single piece for depth and width required for joint, unless otherwise authorized by the Engineer. When more than one piece is authorized for a joint, abutting ends shall be fastened and hold securely to shape by stapling or other positive fastening.

EPOXY BONDING COMPOUND

ASTM C 881. Provide Type I for bonding hardened concrete to hardened concrete; Type II for bonding freshly mixed concrete to hardened concrete; and Type III as a binder in epoxy mortar or concrete, or for use in bonding skid-resistant materials to hardened concrete. Provide Class B if placement temperature is between 4 and 16°C; or Class C if placement temperature is above 16°C.

REINFORCEMENT

Steel reinforcement, other than Steel for Pre-stressing, used in Reinforced Concrete, shall conform to ASTM and PNS as follows:

ASTM Designation A615 - Deformed Billet Steel Bars for Concrete Reinforcement. Minimum yield strength of 276 MPa (40,000 psi).

PNS 49 - Steel Bars for Concrete Reinforcement

TIE WIRE

Tie wire shall be plain, cold drawn annealed steel wire 1.6 mm diameter.

SAMPLES AND TESTING

1. Cement

   Sampled either at the mill or at the site of work and tested by an independent commercial or

government testing laboratory duly accredited by the Bureau of Research and Standards (BRS) of the DPWH, Department of Science and Technology (DOST) or the Department of Trade and Industry (DTI) at no additional cost to PPA. Certified copies of laboratory test reports shall be furnished for each lot of cement and shall include all test data, results, and certificates that the sampling and testing procedures are in conformance with the Specifications. No cement shall be used until notice has been given by the Engineer that the test results are satisfactory. Cement that has been stored, other than in bins at the mills, for more than 3 months after delivery to the Site shall be re-tested before use. Cement delivered at the Site and later found after test to be unsuitable shall not be incorporated into the permanent works.

2. Aggregates: Tested as prescribed in ASTM C 33

At least 28 days prior to commencing the work, the Contractor shall inform the Engineer of the proposed source of aggregates and provide access for sampling.

Gradation tests will be made on each sample without delay. All other aggregates tests required by these Specifications shall be made on the initial source samples and shall be repeated whenever there is a change of source. The tests shall include an analysis of each grade of material and an analysis of the combined material representing the aggregate part of the mix.

3. Reinforcement

Certified copies of mill certificates shall accompany deliveries of steel bar reinforcement. If requested by the Engineer additional testing of the materials shall be made at the Contractor's expense.

4. Concrete Tests

For test purposes, provide 1 set of three (3) concrete cylinder samples taken from each day's pouring and to represent not more than 75 cu.m. of concrete class or fraction thereof of concrete placed. Samples shall be secured in conformance with ASTM C 172. Tests specimens shall be made, cured, and packed for shipment in accordance with ASTM C 31. Cylinders will be tested by and at the expense of the Contractor in accordance with ASTM C 39. Test specimens will be evaluated separately by the Engineer, for meeting strength level requirements for each with concrete quality of ACI 318. When samples fail to conform to the requirements for strengths, the Engineer shall have the right to order a change in the proportions of the concrete mix for the remaining portions of the work at no additional cost to the Authority.

5. Test of Hardened Concrete in or Removed from the Structure

When the results of the strength tests of the concrete specimens indicates the concrete as placed does not meet the Specification requirements or where there are other evidences that the quality of concrete is below the specification requirement in the opinion of the Engineer, tests on cores of in-place concrete shall be made in conformance with ASTM C 42.

Core specimens shall be obtained by the Contractor and shall be tested. Any deficiency shall be corrected or if the Contractor elects, he may submit a proposal for approval before the load test is made. If the proposal is approved, the load test shall be made by the Contractor and the test results evaluated by the Engineer in conformance with Chapter 20 of ACI 318. The cost of the load tests shall be borne by the Contractor. If any concrete shows evidence of failure during the load test, or fails the load test as evaluated, the deficiency be

corrected in a manner approved by the Engineer at no additional cost to the Authority.

6. Chemical Admixtures/Additives

The admixtures/additives if approved shall conform to ASTM C 494 and ASTM C 1017. The testing shall be conducted with cement and aggregate proposed for the Project. The admixtures/additives shall be tested and those that have been in storage at the Project Site for longer than six (6) months shall not be used until proven by retest to be satisfactory.

Samples of any admixtures/additives proposed by the Contractor shall be submitted for testing at least 56 days in advance of use, which shall require approval of the Engineer. Testing of admixtures/additives proposed by the Contractor including test mixing and cylinder test shall be at the Contractor's expense.

7. Jointing Materials and Curing Compound Samples

At least 28 days prior to commencing the work, the Contractor shall submit to the Engineer for his approval samples of the following materials proposed for use together with manufacturer's certificate.

a. 10 kg of joint sealant
b. 1m length of joint filler
c. 5 li. of curing compound
d. 1m length of joint backing

The Engineer shall deliver to the Contractor his assessment on the materials within seven (7) days after receiving them.

EXECUTION

DELIVERY, STORAGE AND HANDLING OF MATERIALS

1. Cement

Do not deliver concrete until vapor barrier, forms, reinforcement, embedded items, and chamfer strips are in place and ready for concrete placement. ACI 301 and ASTM A 934 for job site storage of materials. Protect materials from contaminants such as grease, oil, and dirt. Ensure materials can be accurately identified after bundles are broken and tags removed.

Immediately upon receipt at the Site, the cement shall be stored separately in dry weathertight, properly ventilated structures with adequate provisions for prevention of absorption of moisture. Storage accommodation for concrete materials shall be subject to approval and shall afford easy access for inspection and identification of each shipment in accordance with test reports.

Cement shall be delivered to the Site in bulk or in sound and properly sealed bags and while being loaded or unloaded and during transit to the concrete mixers whether conveyed in vehicles or in mechanical means, cement shall be protected from whether by effective coverings. Efficient screens shall be supplied and erected during heavy winds.

If the cement is delivered in bulk, the Contractor shall provide, at his own cost, approved silos of adequate size and numbers to store sufficient cement to ensure continuity of work

and the cement shall be placed in these silos immediately after it has been delivered to the Site. Approved precautions shall be taken into consideration during unloading to ensure that the resulting dust does not constitute a nuisance.

If the cement is delivered in bags, the Contractor shall provide, at his own cost, perfectly waterproofed and well-ventilated sheds having a floor of wood or concrete raised at least 0.5m above the ground. The sheds shall be large enough to store sufficient cement to ensure continuity of the work and each consignment shall be stacked separately therein to permit easy access for inspection, testing and approval. Upon delivery, the cement shall at once be placed in these sheds and shall be used in the order in which it has been delivered.

Cement bags should not be stacked more than 13 bags high. All cement shall be used within two months of the date of manufacture. If delivery conditions render this impossible, the Engineer may permit cement to be used up to three (3) months after manufacturing, subject to such conditions including addition of extra cement as he shall stipulate.

2. Aggregate

All fine and coarse aggregate for concrete shall be stored on close fitting, steel or concrete stages design with drainage slopes or in bins of substantial construction in such a manner as to prevent segregation of sizes and to avoid the inclusion of dirt and other foreign materials in the concrete. All such bins shall be emptied and cleaned at intervals of every six (6) months or as required by the Engineer. Each size of aggregate shall be stored separately unless otherwise approved by the Engineer.

Stockpiles of coarse aggregate shall be built in horizontal layers not exceeding 1.2 m in depth to minimize segregation.

FORMWORK

1. Forms

Designed, constructed, and maintained so as to insure that after removal of forms the finished concrete members will have true surfaces free of offset, waviness or bulges and will conform accurately to the indicated shapes, dimensions, lines, elevations and positions. Form surfaces that will be in contact with concrete shall be thoroughly cleaned before each use.

2. Design

Studs and wales shall be spaced to prevent deflection of form material. Forms and joints shall be sufficiently tight to prevent leakage of grout and cement paste during placing of concrete. Juncture of formwork panels shall occur at vertical control joints, and construction joints. Forms placed on successive units for continuous surfaces shall be fitted in accurate alignment to assure smooth completed surfaces free from irregularities and signs of discontinuity. Temporary opening shall be arranged to wall and where otherwise required to facilitate cleaning and inspection. Forms shall be readily removable without impact, shock, or damage to the concrete.

3. Form Ties

Factory fabricated, adjustable to permit tightening of the forms, removable or snap-off metal of design that will not allow form deflection and will not spall concrete upon removal. Bolts and rods that are to be completely withdrawn shall be coated with a non-staining

bond breaker. Ties shall be of the type which provide watertight concrete.

4. Chamfering

External corners that will be exposed shall be chamfered, beveled, or rounded by mouldings placed in the forms or as indicated in the drawings.

5. Coatings

Forms for exposed surfaces shall be coated with form oil or form-release agent before reinforcement is placed. The coating shall be a commercial formulation of satisfactory and proven performance that will not bond with, stain, or adversely affect concrete surfaces, and shall not impair subsequent treatment of concrete surfaces depending upon bond or adhesion nor impede the wetting of surfaces to be cured with water or curing compounds. The coating shall be used as recommended in the manufacturer's printed or written instructions. Forms for unexposed surfaces may be wet with water in lieu of coating immediately before placing of concrete. Surplus coating on form surfaces and coating on reinforcement steel and construction joints shall be removed before placing concrete.

6. Removal of Forms shall be done in a manner as to prevent injury to the concrete and to insure complete safety of the structure after the following conditions have been met. Where the structure as a whole is supported on shores, forms for beam and girder sides, and similar vertical structural members may be removed before expiration of curing period. Care shall be taken to avoid spalling the concrete surface or damaging concrete edges. Wood forms shall be completely removed.

Minimum stripping and striking time shall be as follows unless otherwise approved by the Engineer.

Vertical sides of beams, walls, and columns, lift not 12 hours exceeding 1.2 m

Vertical sides of beams and walls, lift exceeding 1.2 m 36 hours Softlifts of main slabs and beams (props left under) 5 days

Removal of props from beams and mains slabs and other work 10 days

7. Control Test

If the Contractor proposes to remove forms earlier than the period stated above, he shall be required to submit the results of control tests showing evidence that concrete has attained sufficient strength to permit removal of supporting forms. Cylinders required for control tests shall be provided in addition to those otherwise required by this Specification. Test specimens shall be removed from molds at the end of 24 hours and stored in the structure as near the points as practicable, the same protection from the elements during curing as is given to those portions of the structure which they represent and shall not be removed from the structure for transmittal to the laboratory prior to expiration of three fourths of the proposed period before removal of forms. Cylinders will be tested by and at the expense of the Contractor. Supporting forms or shoring shall not be removed until control test specimens have attained strength of at least 160 kg/sq cm. The newly unsupported portions of the structure shall not be subjected to heavy construction or material loading.

REINFORCEMENT

1. Reinforcement

Fabricated to shapes and dimensions shown and shall be placed where indicated. Reinforcement shall be free of loose or flaky rust and mill scale, or coating, and any other substance that would reduce or destroy the bond. Reinforcing steel reduced in section shall not be used. After any substantial delay in the work, previously placed reinforcing steel for future bonding shall be inspected and cleaned. Reinforcing steel shall not be bent or straightened in a manner injurious to the steel or concrete. Bars with kinks or bends not shown in the drawings shall not be placed. The use of heat to bend or straighten reinforcing steel shall not be permitted. Bars shall be moved as necessary to avoid interference with other reinforcing steel, conduits, or embedded items. If bars are moved more than one bar diameter, the resulting arrangement of bars including additional bars necessary to meet structural requirements shall be approved before concrete is placed. In slabs, beams and girders, reinforcing steel shall not be spliced at points of maximum stress unless otherwise indicated. Unless otherwise shown in the drawings, laps or splices shall be 40 times the reinforcing bar diameter.

2. The nominal dimensions and unit weights of bars shall be in accordance with the following table:

Nominal Diameter (mm)	Nominal Perimeter (mm)	Nominal Sectional Area (sq. mm)	Unit Weight (kg/m)
10	31.4	78.54	0.616
12	37.7	113.10	0.888
16	50.3	201.10	1.579
20	62.8	314.20	2.466
25	78.5	490.90	3.854
28	88.0	615.70	4.833
32	100.5	804.20	6.313
36	113.1	1,017.60	7.991
40	125.7	1,256.60	9.864
50	157.1	1,963.50	15.413

3. Welding of reinforcing bars shall only be permitted where shown; all welding shown shall be performed in accordance with AWS D 12.1.

4. Exposed reinforcement bars, dowels and plates intended for bonding with future extensions shall be protected from corrosion.

5. Supports shall be provided in conformance with ACI 315 and ACI 318, unless otherwise indicated or specified.

6. Concrete Protection for Reinforcement

a. The minimum concrete cover of reinforcement shall be as shown below unless otherwise indicated in the drawings.

b. Tolerance for Concrete Cover of Reinforcing Steel other than Tendons.

Minimum Cover

7.5cm or more (marine structures and concrete cast against and permanently exposed to earth)

DESIGN STRENGTH OF CONCRETE

Concrete for structural parts or members such as beams, slabs, curtain wall, pile caps and fender/mooring blocks shall develop a minimum 28-day compressive cylinder strength of 24 MPa (3,500 psi) as indicated in the drawings. While for pre-stressed concrete piles a compressive strength of 35 MPa (5,000psi).

TRIAL BATCH FOR CONCRETE

Thirty (30) calendar days before the start of concreting works, the Contractor shall submit design mixes and the corresponding test result made on sample thereof. Sampling and testing shall be in accordance with the ASTM Standard procedures for sampling and testing for the particular design strength(s) required.

The particulars of the mix such as the slump and the proportionate weights of cement, saturated surface dry aggregates and water used shall be stated.

The design mix for concrete to be used shall be submitted together with at least three (3) standard cylinder samples for approval at least one (1) month prior to the start of each concreting schedule. Such samples shall be prepared in the presence of the Engineer.

Standard laboratory strength tests for the 7, 14 and 28 days periods shall be taken to all concrete samples in addition to routine field tests, at cost to the Contractor. Only design mixes represented by test proving the required strength for 7, 14 and 28 days tests shall be allowed.

The cost of sampling, handling and transporting samples from jobsite to the laboratory and the cost of subsequent tests made until the desired mix is attained shall be for the account of the Contractor.

Slump Test shall be made in conformance with ASTM C143, and unless otherwise specified by the Engineer, slump shall be within the following limits:

Structural Element	Slump for Vibrated Concrete	
	Minimum	Maximum
Pavement Concrete	25mm	50mm
Pre-cast Concrete	50mm	70mm
Lean Concrete	100mm	200mm

Sacked Concrete	25mm	50mm
All other Concrete	50mm	90mm

Sampling : Provide suitable facilities and labor for obtaining representative samples of concrete for the Contractor's quality control and the Engineer's quality assurance testing. All necessary platforms, tools and equipment for obtaining samples shall be furnished by the Contractor.

MIXING CONCRETE

1. GENERAL

a. Concrete shall be thoroughly mixed in a mixer of an approved size and type that will insure a uniform distribution of the materials throughout the mass.

b. All concrete shall be mixed in mechanically operated mixers. Mixing plant and equipment for transporting and placing concrete shall be arranged with an ample auxiliary installation to provide a minimum supply of concrete in case of breakdown of machinery or in case the normal supply of concrete is disrupted. The auxiliary supply of concrete shall be sufficient to complete the casting of a section up to a construction joint that will meet the approval of the Engineer.

c. Equipment having components made of aluminum or magnesium alloys, which would be in contact with plastic concrete during mixing, transporting or pumping of Portland cement concrete, shall not be used.

d. Concrete mixers shall be equipped with adequate water storage and a device for accurately measuring and automatically controlling the amount of water used.

e. Materials shall be measured by weighing. The apparatus provided for weighing the aggregates and cement shall be suitably designed and constructed for this purpose. The accuracy of all weighing devices except that for water shall be such that successive quantities can be measured to within one percent of the desired amounts. The water measuring device shall be accurate to plus or minus 0.5 percent. All measuring devices shall be subject to the approval of the Engineer. Scales and measuring devices shall be tested at the expense of the Contractor as frequently as the Engineer may deem necessary to ensure their accuracy.

f. Weighing equipment shall be insulated against vibration or movement of other operating equipment in the plant. When the entire plant is running, the scale reading at cut-off shall not vary from the weight designated by the Engineer by more than one percent for cement, 1-½ percent for any size of aggregate, or one percent for the total aggregate in any batch.

g. Manual mixing of concrete shall not be permitted unless approved by the Engineer.

2. MIXING CONCRETE AT SITE

a. Concrete mixers may be of the revolving drum, or the revolving blade type, and the mixing drum or blades shall be operated uniformly at the mixing speed recommended by the manufacturer.

The pick-up and throw-over blades of mixers shall be restored or replaced when any part or section is worn 20 mm or more below the original height of the manufacturer's design. Mixers and agitators which have an accumulation of hard concrete or mortar shall not be used.

b. When bulk cement is used and the volume of the batch is 0.5 m^3 or more, the scale and weigh hopper for Portland cement shall be separate and distinct from the aggregate hopper or hoppers.

The discharge mechanism of the bulk cement weigh hopper shall be interlocked against opening before the full amount of cement is in the hopper. The discharging mechanism shall be interlocked against opening when the amount of cement in the hopper is underweight by more than one percent or overweight by more than 3 percent of the amount specified.

c. When the aggregates contain more water than the quantity necessary to produce a saturated surface dry condition, representative samples shall be taken, and the moisture content determined for each kind of aggregate.

d. The batch shall be so charged into the mixer that some water enters in advance of cement and aggregates. All water shall be in the drum by the end of the first quarter of the specified mixing time.

e. Cement shall be batched and charged into the mixer by such means that it will not result in loss of cement due to the effect of wind, or in accumulation of cement on surfaces of conveyors or hoppers, or in other conditions which reduce or vary the required quantity of cement in the concrete mixture.

f. Where required, synthetic fibrous reinforcement shall be added directly to the concrete mixer after placing the sufficient amount of mixing water, cement and aggregates.

g. The entire contents of a batch mixer shall be removed from the drum before materials for a succeeding batch are place therein. The materials composing a batch except water shall be deposited simultaneously into the mixer.

h. All concrete shall be mixed for a period of not less than 3 minutes after all materials, including water, are in the mixer. During the period of mixing, the mixer shall operate at the speed for which it has been designed.

i. Mixers shall be operated with an automatic timing device that can be locked by the Engineer. The time device and discharge mechanism shall be so interlocked that during normal operation no part of the batch will be discharged until the specified mixing time has elapsed.

j. The first batch of concrete materials placed in the mixer shall contain a sufficient excess of cement, sand, and water to coat the inside of the drum without reducing the required mortar content of the mix. When mixing is to cease for a period of one hour or more, the mixer shall be thoroughly cleaned.

k. In case of rubble concrete, proper mixture and placing of concrete and stones/rocks shall be in accordance to the approved plan. Methodology of work shall be approved by the Engineer.

3. MIXING CONCRETE IN TRUCKS

a. Truck mixers, unless otherwise authorized by the Engineer, shall be of the revolving drum type, watertight, and so constructed that the concrete can be mixed to insure a uniform distribution of materials throughout the mass. All solid materials for the concrete shall be accurately measured and charged into the drum at the proportioning plant. Except as subsequently provided, the truck mixer shall be equipped with a device by which the quantity of water added can be readily verified. The mixing water may be added directly to the batch, in which case a tank is not required. Truck mixers may be required to be provided with a means by which the mixing time can be readily verified by the Engineer.

b. The maximum size of batch in truck mixers shall not exceed the minimum rated capacity of the mixer as stated by the manufacture and stamped in metal on the mixer. Truck mixing shall, unless otherwise directed, be continued for not less than 100 revolutions after all ingredients, including water, are in the drum. The mixing speed shall not be less than 4 rpm, nor more than 6 rpm.

c. Mixing shall begin within 30 minutes after the cement has been added either to the water or aggregate, but when cement is charged into a mixer drum containing water or surface-wet aggregate and when the temperature is above 32 °C, this limit shall be reduced to 15 minutes. The limitation in time between the introduction of the cement to the aggregate and the beginning of the mixing may be waived when, in the judgment of the Engineer, the aggregate is sufficiently free from moisture, so that there will be no harmful effects on the cement.

d. When a truck mixer is used for transportation, the mixing time in stationary mixer may be reduced to 30 seconds and the mixing completed in a truck mixer. The mixing time in truck mixer shall be as specified for truck mixing.

JOINTS

1. No reinforcement, corner protection angles or other fixed metal items shall be run continuously through joints containing expansion-joint filler, through crack-control joints in slabs on grade and vertical surfaces.

2. Preformed Expansion Joint Filler

a. Joints with Joint Sealant

At expansion joints in concrete slabs to be exposed, and at other joints indicated to receive joint sealant, preformed expansion-joint filler strips shall be installed at the proper level below the elevation with a slightly tapered, dressed-and-oiled wood strip temporarily secured to the top thereof to form a groove. When surface dry, the groove shall be cleaned of foreign matter, loose particles, and concrete protrusions, then filled flush approximately with joint sealant so as to be slightly concave after drying.

b. Finish of concrete at joints

Edges of exposed concrete slabs along expansion joints shall be neatly finished with a slightly rounded edging tool.