CLEARING AND DISPOSAL

Dumping or disposal of un-used excavated materials shall be coordinated to PMO. If the excavated materials are determined for disposal, the contractor will provide all necessary works and expenses for its completion in concurrence by the Engineer.

ITEM 14 : MOORING AND FENDERING SYSTEM

SCOPE OF WORK

1. The work includes furnishing of all labor, materials and equipment to complete the installation of mooring bollards and fenders in piers/wharves.

2. The work shall include the supply, transport, handling, storage and installation of fenders systems in the newly constructed piers.

3. The Contractor shall furnish and install the necessary fittings as shown on the drawings and/or specified.

Supplementary parts necessary to complete and install each item of works shall be included whether or not shown or specified. The Contractor shall furnish to relevant trades all anchors, fastenings, inserts, fittings, fixtures or the like to be installed on or required for securing the works.

The Contractor shall submit shop drawings of all fitting works prior to placing orders and commencement of any fabrication.

MATERIAL REQUIREMENTS

MOORING SYSTEM

Designated load capacity of mooring bollards shall be as shown in the drawings, and shall be referred to as the maximum load capacity. The mooring bollards shall be at rupture stage upon reaching the maximum load capacity.

Mooring bollards shall be of the dimensions, weights, capacities and designs as shown in the drawings and shall be fabricated by approved manufacturer with cast steel conforming to the requirements indicated in the plan/drawings, or approved equivalent.

The size of the bolts, nuts and washers shall be in accordance with the specifications provided in the plans/drawings. The anchor plate shall be connected to the holding down bolt as shown in the plans/drawings. All bolts, nuts, washers etc., that are exposed shall be hot-dip galvanized.

Samples of the bolts, nuts, washers and anchor plates shall be submitted to the Engineer for approval before being used in the Works.

The upper part of bollards and base plates which are not embedded in concrete shall be painted. The surface of bollards shall be cleaned thoroughly by wire brush or other means prior to painting to remove rust or any other contamination which may interfere with bond of paint to metal.

The exposed surface shall be coated with rust proof paint and finishing paint, which shall be coal-tar epoxy of 120m micron thickness in accordance with JIS K5623 or the approved standard.

Base Steel:

Chemical composition and mechanical properties of base metal to be used for fabrication of mooring bollard and its accessories shall comply with ASTM A36 and other required standard stated therein.

Concrete Foundation :

Concrete foundation for mooring bollards shall conform to the requirements of the Section concerning "Reinforced Concrete".

Visual Inspection :

All mooring bollards delivered to Site shall be inspected by the Engineer for any signs of flaws or defect inimical to usage.

Mill Test Certificates:

Two (2) copies of mill test reports shall be submitted certifying that materials meet the specified standards.

Test Inspection:

Inspection of all materials and methods of fabrication shall be carried out by the Contractor. However, the Engineer reserves the right to inspect all facilities at any time during the manufacture to ensure that the materials and workmanship are in accordance with Specifications and the best of workmanship.

FENDER SYSTEM

The rubber fenders should comply with the performance requirements specified in the table provided on the plan/drawings of Rubber Dock Fenders (RDF).

PHYSICAL PROPERTIES OF MATERIALS

The rubber for the fenders shall be of high quality natural rubber, synthetic rubber or mixed rubber blended with carbon black used in the rubber industry and shall have sufficient resilience and anti-ageing, weathering, abrasion, wear and oil resistant properties. The rubber dock fenders shall be free from bubbles, cracks and other harmful defects.

The physical properties of the rubber compound used for the fenders shall comply with the following requirements:

Physical Properties and Test Method

Test Item			Properties	Test Method	
Physical Test	Before Aging	Tensile Strength	160kg/sq.m minimum	Test piece: Dumbell No. 3	ASTM D412
		Elongation	350% minimum		ASTM D1456
		Hardness	76Hs maximum	Spring Type hardness test (Type A)	ASTM D2240
	After Aging	Tensile Strength	Not less than 80% of original value	Aging by air heating: 70±1°C x 96 hours.	ASTM D412
		Elongation			ASTM D1456
		Hardness	Not more than original value +8°		ASTM D2240
	Compression Test		30% maximum	Heat treatment: 70±1°C x 22 hours.	ASTM D395

Note: Equivalent Standards are acceptable.

FITTINGS AND ANCHORAGE

Anchor bolts and connecting hardware shall be fabricated using type of steel specified and to the required shapes and sizes shown on the approved plan/drawings.

TESTING, SAMPLING, INSPECTION, ACCEPTANCE, MARKING AND PACKAGING

Testing

All rubber dock fenders shall be tested for performance. It shall pass the required energy absorption and reaction force at a certain deflection as indicated in the plan.

The Contractor shall be required to submit test certificates showing compliance to the above requirements. The test certificates shall be certified by an independent testing institute / organization recognized by the Authority.

The standard performance testing methodology shall be Method B, to wit:

1. Fender temperature shall be stabilized at 23 degrees plus or minus 5 degrees centigrade for at least 24 hours before compression testing.

2. Break-in of fender by deflecting 3 times to rated deflection.

3. Removed load from the RDF and allow recovering for a minimum of 1 hour.

4. Deflect RDF at speed of 2-8 cm/min once to rated deflection.

The testing apparatus shall be calibrated and certified within plus or minus 1% in accordance with ISO or equivalent JIS or ASTM requirements. Calibration shall be traceable to a national/international standard and shall be performed annually by an accredited third party organization. The RDF performance testing center shall be subjected to accreditation by PPA and notation and /or certification by DPWH-BRS prior to acceptance.

Inspection

All fenders of each type shall be inspected for compliance to specified dimensions and all fenders shall be inspected by the Engineer for any sign of flaw or defect inimical to its use.

All anchor bolts and fittings shall be inspected. The material used for the fabrication of bolts and fittings shall be covered by the manufacturer's certified mill certificate and shall be verified by the Authority.

All RDF items/units shall be clearly numbered and marked indicated the following:

Acceptance Tolerance

The acceptance tolerance shall be based on the following:

1. Fender Dimension

Length	:	-2% to +4%
Width	:	-2% to +4%
Height	:	-2% to +4%
Thickness	:	-2% to +8%

2. Anchor Bolt Holes in Fender

Diameter of the Hole	:	+2.0mm
Pitch of the Hole	:	+4.0mm

3. Acceptance tolerance for all fenders supplied shall be as follows:

E = Energy absorption,	E ≥ Specified E but not less than 10% of the specified E
R = Reaction force,	R ≤ Specified R but not more than 10% of the specified R

Marking

All fender units shall be clearly numbered and marked. Each fender shall have the following markings.

1. Fender type and manufacturer's name or trade mark
2. Production serial number
3. Date of manufacture or its abbreviation
4. Main dimensions
5. Project identification as follows:

Name of Port/Project:_____

Year supplied _____

Packaging

The fenders shall be packaged on wooden crate or wrapped individually with Polypropylene sheets except when shipped containerized. The bolts and fittings should be placed in crates and suitably treated for protection when transported by sea and stored in port areas.

EXECUTION

MOORING / FENDERING SYSTEM

All units shall be installed at the locations shown on the drawings and as directed by the Engineer.

ITEM 15 : ELECTRICAL WORKS

SCOPE OF WORK

The work to be done shall consist of furnishing, delivering, and installing electrical materials / fixtures completed in accordance with all the details of the electrical works as shown on the drawings including materials, labor, tools and equipment and all incidental works as found necessary.

Refer to electrical plans/drawings for location and extent of work involved.

GENERAL REQUIREMENTS

a) All works shall be done in accordance with the requirements of the publications and agencies having jurisdiction, as well as the requirements of the approved standards.

1.	National Fire Protection Association	-	(NFPA)
2.	National Electrical Manufacturer Association	-	(NEMA)
3.	Underwriter Laboratories, Inc.	-	(UL)
4.	Philippine Electrical Code Philippine National Standard	- -	(PEC) (PNS)
5.	Federation Specification: Circuit Breaker, Molded Case, Branch Circuit and Service		
6.	American National Standard Institute	-	(ANSI)
7.	American Society for Testing and Materials	-	(ASTM)
8.	Illuminating Engineering Society	-	(IES)
9.	Light Emitting Diode	-	(LED)

b) The Contractor shall employ a licensed Registered Electrical Engineer or Master electrician to perform or to supervise and to conduct the continuous inspection of all electrical work.

c) The Contractor shall first obtain approval from the Authority before procurement, fabrication, or delivery of electrical materials to the site. Partial submittals will not be acceptable and will be returned without review. Submittals shall include the Manufacturer's Name, Trade Name, Place of Manufacture, Catalog Model or Number, Nameplate Data, Size, Layout Dimensions, Capacity, Project Specification and Paragraph Reference, Technical Society Publication References, and other information necessary to establish contract compliance of each item to be furnished.

d) All excavations fill and backfill, and concrete works involved herein shall be carried to the required elevations and shall conform to the provisions of specification under Earthwork and Concrete Construction of this tender document.

e) The materials and equipment to be furnished shall be standard products of reputable manufacturers engaged in the reproduction of such materials and equipment.

f) The Contractor shall furnish and install electrical materials as shown in the drawings. A licensed Electrical Engineer or Master Electrician is required to implement the installation of the electrical system.

g) Electrical installation shall conform to the requirements of Philippine Electrical Code (PEC) and the other approved standards.

h) The contractor shall install all electrical work with the supervision of the qualified Registered Electrical Engineer (REE) or Master Electrician. All electrical installation applications regardless of capacity and voltage whether new, addition or revision shall be accompanied by electrical plans signed and sealed by a duly licensed Professional Electrical Engineer (PEE).

i) The electrical power will be connected to the normal supply of electric cooperative where the Main Disconnected Panel (MDP) is located. While the supply voltage must be 230 volts, single phase (1Ø), and 60 hertz.

MATERIAL REQUIREMENTS

All materials shall be brand new and shall be of the approved type meeting all the requirements of the Philippine Electrical Code and bearing the Philippine Standard Agency (PSA) mark.

PRODUCTS

WIRES AND CABLES

The conductor material to be furnished and installed shall be copper wire Heat-Resistant Thermoplastic (THHN/THWN-2). All conductors shall be rated 600 volts insulation and shall be standard for all sizes.

CONDUIT AND FITTINGS

PVC conduit shall be polyvinyl chloride it shall be manufactured to schedule 40 outside diameter. All fittings and bends shall be solvent bonded using manufacturers recommended product.

PANEL BOARD

Panel board shall conform as shown on the approved plans with respect to supply characteristics, rating of main lugs or main circuit breaker, number and ratings and capacities of branch circuit breakers.

Main and branch circuit breakers for panel board shall have the rating, capacity and number of poles as shown on the approved plans. Breakers shall be thermal magnetic type solid state-type with interrupting capacity of 10,000 amperes symmetrical minimum. Breaker terminal shall be UL listed as suitable for type of conductor provided. Breaker shall be the bolt-in type (that is, bolted to the current carrying bus). Plug-in circuit breakers are not acceptable.

INTERIOR WIRING SYSTEMS

SUBMITTALS

a. Shop Drawings: Submit for the following:

1. Location of panel boards and circuit breaker

b. Manufacturer's data: Submit for the following:

1. Circuit Breakers
2. Switches
3. Panel Board

PORT LIGHTING SYSTEM

PRODUCT

LED FLOOD LIGHT FIXTURE OR EQUIVALENT

Specifications:

Rated	: 200 Watt
Input voltage	: AC 85-265V / 50-60HZ.
Luminous flux	: 22,000 LM – 24,000 LM
Color temperature	: 5500/6500K daylight.
Light source	: 4 layers of high brightness led module.
Material	: Die cast aluminum alloy housing
Beam angle	: 120 degrees.
Lifetime	: 50,000 hours
IP rating	: IP 66 Outdoor (water resistant and excellent for outdoor use)

LED ROADWAY LIGHTING FIXTURE OR EQUIVALENT

Specifications:

Rated	: 150 Watt
Input voltage	: AC 85-265V / 50-60HZ.
Luminous flux	: 21,750 LM
Color temperature	: 5500/6500K daylight.
Light source	: 4 layers of high brightness led module.
Material	: Die cast aluminum housing with high quality power-coating layer
Beam angle	: 70 ° to 135 °
Lifetime	: 40,000 hours
IP rating	: Weatherproof IP65 (ingress protection from water and dust)
Voltage	: Wide operating voltage of AC 90V-305V

10 METER STEEL TAPERED LAMP POST WITH 1.5M ANGLE BAR

Lamp Post shall be 10.0 m ht. steel tapered lamp post, furnished installed and tested as shown on the approved plans. The post/s shall be dimensioned for a wind velocity of 185 km/hr. It shall be locally fabricated or manufactured. The post shall be Hot –Dipped Galvanized, prime-coated with red lead and shall be painted at site with the final coating preferably aluminum paint to be approved by the Engineer.

Specifications:

Round steel tapered post 7" x 4" x 10mtrs with wall shaft thickness of 2.8-3.0mm with 1.5m Single cross bar type. Complete with base plate 19mm x 350mm x 350mm, stiffener plate 12mm x 10", anchor bolt 1" x 30" oal, nut and flat washer. Hot dip galvanized.

10 METER STEEL TAPERED LAMP POST WITH 1.5M SINGLE CURVE ARM

Lamp Post shall be 10.0 m ht. steel tapered lamp post, furnished installed and tested as shown on the approved plans. The post/s shall be dimensioned for a wind velocity of 185 km/hr. It shall be locally fabricated or manufactured. The post shall be Hot –Dipped Galvanized, prime-coated with red lead and shall be painted at site with the final coating preferably aluminum paint to be approved by the Engineer.

Specifications:

Round steel tapered post 7" x 4" x 10mtrs with wall shaft thickness of 2.8-3.0mm with 1m Single bracket type. Complete with base plate 18mm x 300mm x 300mm, stiffener plate 12mm x 10", anchor bolt 1" x 30" oal, nut and flat washer. Hot dip galvanized.

CONCRETE DUCT BANK

The contractor shall construct concrete duct bank as shown in the approved plan.

EXECUTION

INSTALLATION

Metering: the local electric cooperative is responsible for the supply and installation of measuring equipment, and its accessories, but it is part of the contractor responsibility and expense to contact them about this.

For the 10-meter Steel tapered lamp post with angle bar and another 10-meter Steel tapered lamp post with single curve arm shall be installed as shown on the approved plans.

Pole Setting: Depth as shown on the approved plans.

Construction of lamp post foundation shall be in accordance with the shape and dimensions as shown on the approved plans.

Excavations / backfilling required before /after installation of lamp post foundation with the trench shall conform to the provisions of Earthwork and Concrete construction.

WORKMANSHIP

The work throughout shall be executed in the best and most thorough manner under the direction of and at the satisfaction of the Registered Electrical Engineer or Master Electrician, who will interpret the intent meaning of the drawings and specification and shall have the power to reject any work and materials which in his judgment, are not in full accordance therewith.

TESTING OPERATIONS

When the electrical installation is completed, the Contractor shall test the installed electrical materials and equipment in the presence of Registered Electrical Engineer or Master Electrician. The system shall be free from any defects, shorts, or grounds. The Contractor at no extra cost shall furnish all necessary instruments and personnel required for the testing.

GUARANTEE

Upon completion and before final acceptance of the work, the Contractor shall furnish the Engineer a written guarantee stating that all works executed are free from defects on materials and workmanship. The guarantee shall be for a period of one year from the date of the final acceptance. Any work that becomes defective during the said period shall be corrected / replaced by the Contractor at his own expense in a manner satisfactory to the Authority.

ITEM 16 : PROJECT BILLBOARD

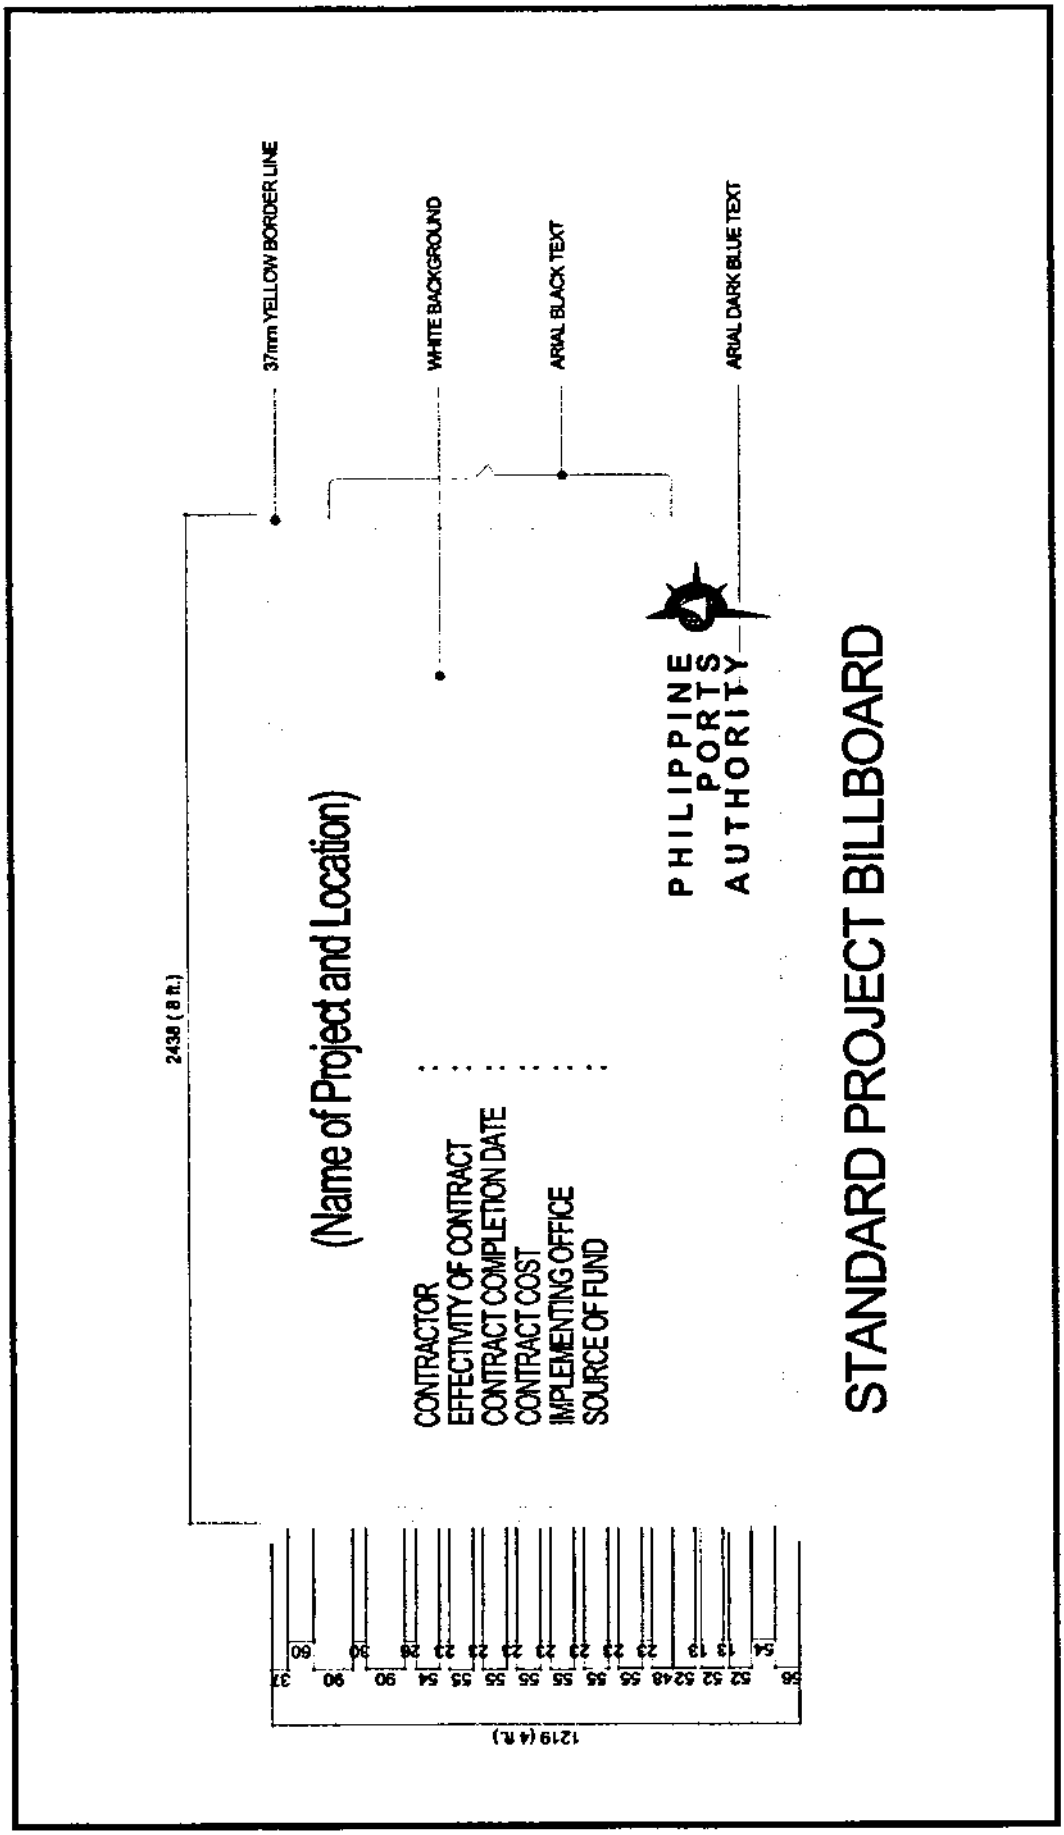
SPECIFICATION

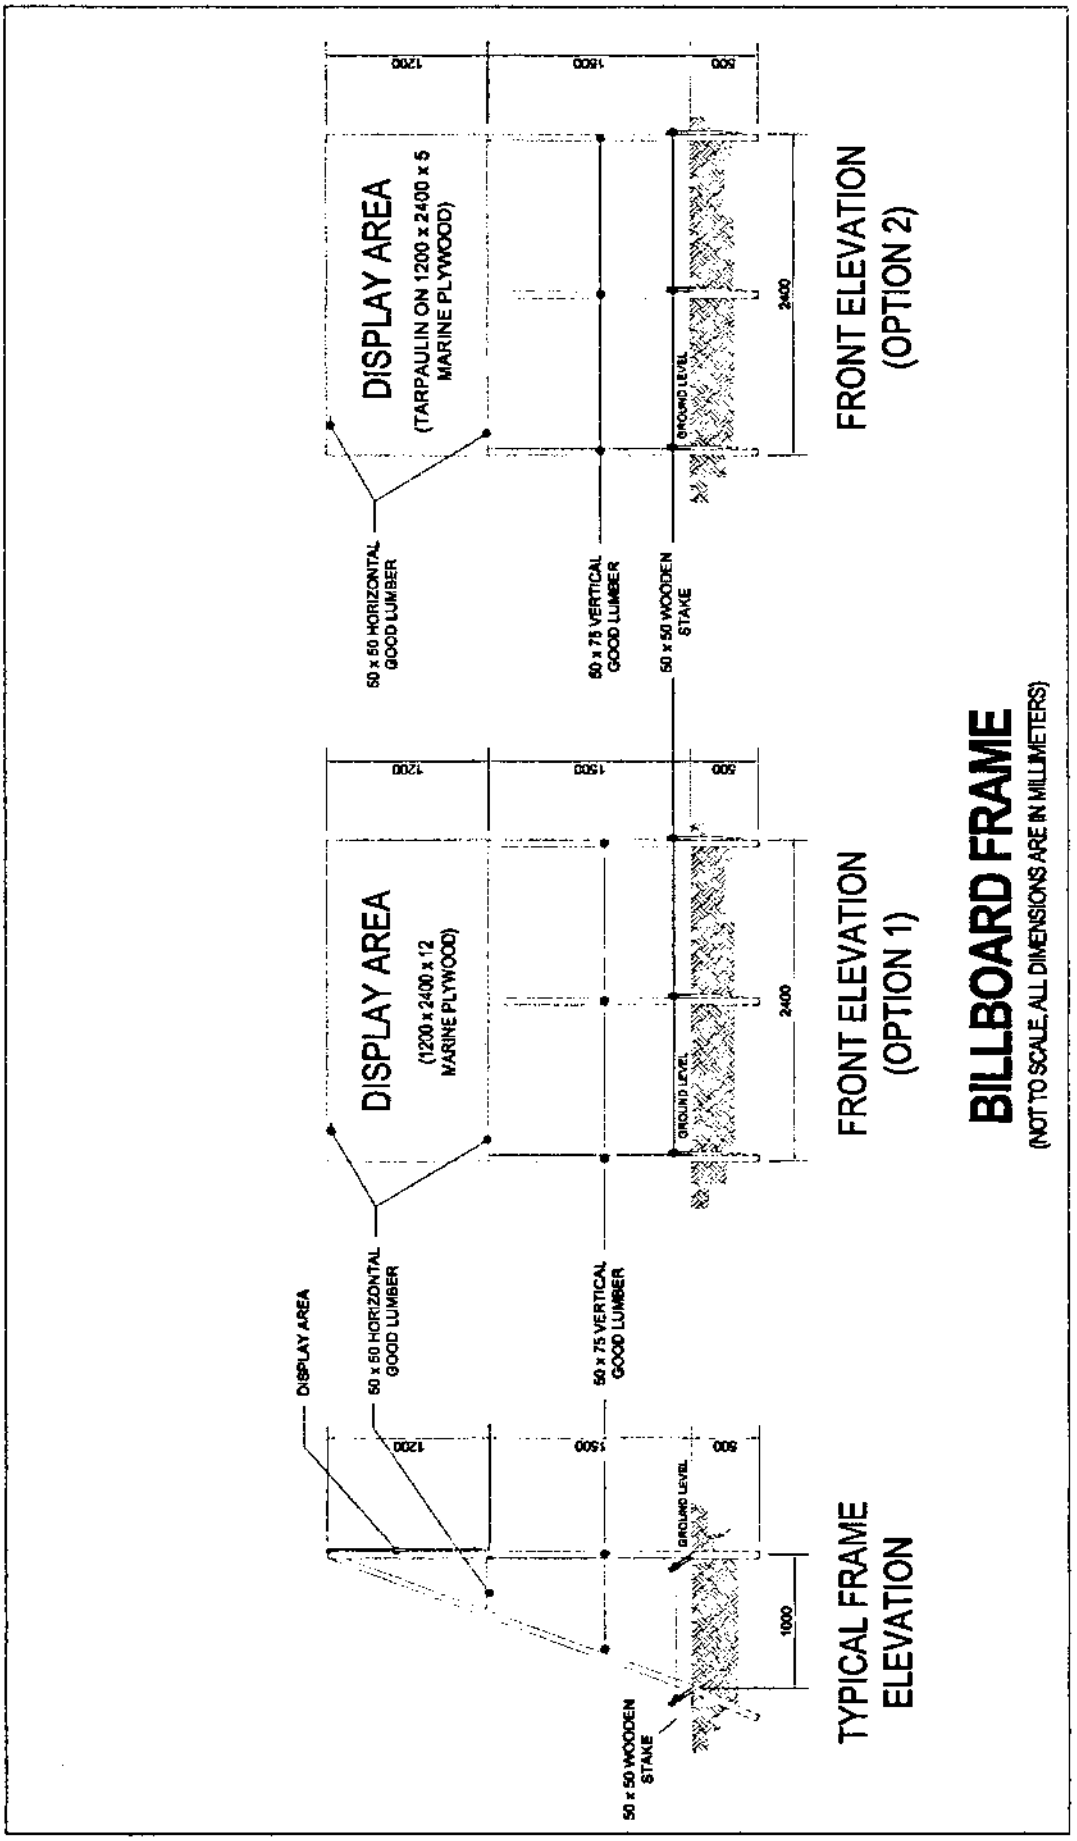
The Project Billboard shall be installed at location(s) designated by the Engineer.

The size and specifications of materials for the standard billboard shall be 4ft. x 8ft. (1,200mm x 2,400mm) using ½ inch (12mm) marine plywood or tarpaulin poster on 3/16 inch (5mm) marine plywood.

Project billboards shall not contain Name(s) and/or picture(s) of any personages.

See attached drawings for further details of the standard billboard.


STANDARD PROJECT BILLBOARD
PHILIPPINE PORTS AUTHORITY
(Name of Project and Location)
CONTRACTOR
EFFECTIVITY OF CONTRACT
CONTRACT COMPLETION DATE
CONTRACT COST
IMPLEMENTING OFFICE
SOURCE OF FUND
37mm YELLOW BORDER LINE
WHITE BACKGROUND
ARIAL BLACK TEXT
ARIAL DARK BLUE TEXT
2438 (8 ft.)
1219 (4 ft.)


BILLBOARD FRAME
(NOT TO SCALE, ALL DIMENSIONS ARE IN MILLIMETERS)
TYPICAL FRAME ELEVATION
FRONT ELEVATION (OPTION 1)
FRONT ELEVATION (OPTION 2)
DISPLAY AREA
(1200 x 2400 x 12 MARINE PLYWOOD)
(TARPAULIN ON 1200 x 2400 x 5 MARINE PLYWOOD)
50 x 50 HORIZONTAL GOOD LUMBER
50 x 75 VERTICAL GOOD LUMBER
50 x 50 WOODEN STAKE
GROUND LEVEL
1200
1500
500
2400
1000

ITEM 17 : SAFETY SIGNAGES AND BARRICADES

DESCRIPTION

This work includes the furnishing and installing of safety signages and barricades in accordance with the specifications and to the details shown below in the drawings, or as directed by the Engineer.

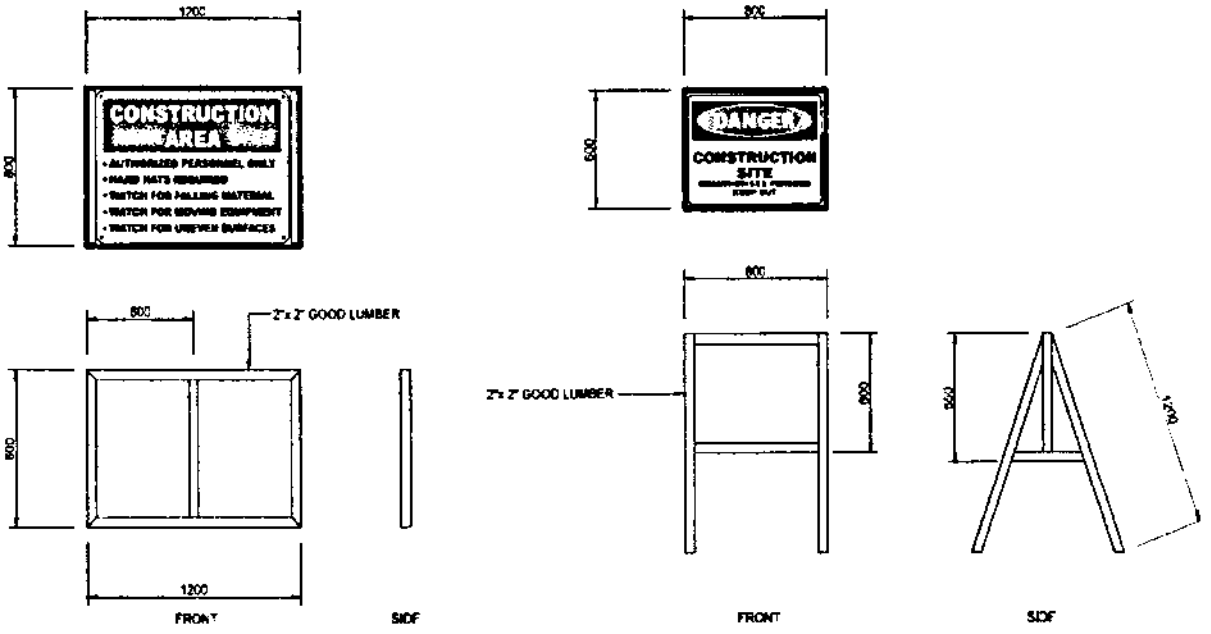
SPECIFICATION

The Signage's and Barricades shall be installed at location(s) designated by the Engineer.

The sizes of the standard signages shall be 2-2/3ft x 4ft (800mm X 1,200mm) for fixed type and 2ft x 2–2/3ft (600mm x 800mm) for mobile type. For barricade standard 2ft x 2–2/3ft (600mm x 800mm) shall be provided.

The materials to be used for signages and barricades are ½ inch (12mm) marine plywood or tarpaulin poster on 2" x 2" (50mm x 50mm) good lumber frame (see drawing below).

The printing or painting shall be the discretion of the Engineer.



STANDARD PLAN FOR SIGNAGES AND BARRICADES

SECTION VII

DRAWINGS
(APPROVED PLANS)

DRAWINGS AND APPROVED PLANS
(SEE ISSUED APPROVED PLANS)

LIST OF DRAWINGS:

PORT OPERATIONAL AREA WITH CONTINUOUS RORO RAMP

01	OF	25	-	DEVELOPMENT PLAN, VICINITY MAP, GENERAL NOTES, LIST OF DRAWINGS
02	OF	25	-	GENERAL PLAN
03	OF	25	-	PILING PLAN @ PORT OPERATIONAL AREA
04	OF	25	-	SECTION A-A
05	OF	25	-	SECTION B-B
06	OF	25	-	SECTION C-C
07	OF	25	-	SECTION D-D
08	OF	25	-	SECTION E-E
09	OF	25	-	SECTION F-F, SECTION G-G
10	OF	25	-	SECTION H-H, SECTION I-I
11	OF	25	-	SECTION J-J, PORTION SHOWING RORO RAMP REINFORCEMENT, DETAIL OF CONSTRUCTION JOINT, DETAIL OF RC DITCH
12	OF	25	-	DETAIL OF RETAINING WALLS, DETAIL OF WING WALL, DETAIL OF ANCHOR PILE WALL
13	OF	25	-	DETAIL OF MOORING BLOCK, DETAIL OF PAVEMENT, DETAIL OF ANCHOR BLOCK, INSTALLATION DETAIL OF STEEL RAMP PROTECTION
14	OF	25	-	KEY SHEET PILING PLAN, DETAIL OF TIE RODS
15	OF	25	-	DETAIL OF CATCH DRAIN MANHOLE, STORM DRAINAGE LAYOUT
16	OF	25	-	GENERAL PLAN @ PROPOSED ACCESS ROAD
17	OF	25	-	SECTION K-K, SECTION L-L

18	OF	25	-	SECTION M-M, SECTION N-N
19	OF	25	-	DETAILED SECTION STAIR LANDING, DETAIL OF BOX CULVERT, DETAIL OF LATERAL DRAIN, DETAIL OF SLOTTED RC CURB
20	OF	25	-	DETAIL OF RUBBER DOCK FENDER, DETAIL OF MOORING BOLLARD
21	OF	25	-	DETAIL OF PRE-STRESSED CONCRETE PILE
22	OF	25	-	DETAIL OF 1000MM X 14MM THK. TUBULAR STEEL SHEET PILES
23	OF	25	-	PORT LIGHTING LAYOUT PLAN, GENERAL NOTES, LEGEND
24	OF	25	-	FLOODLIGHT POST CONNECTION DETAILS, SINGLE ANGLE BAR FLOODLIGHT STEEL TAPPERED LAMP POST, SINGLE ARM CURVE STEEL TAPPERED LAMP POST WITH ROADWAY LIGHTING FIXTURE
25	OF	25	-	LOAD SCHEDULE, RISE DIAGRAM, ELECTRICAL HANDHOLE DETAIL, DETAIL OF CONCRETE PEDESTAL POST, LEGEND, DETAIL OF DUCTBANK ON GATE COMPLEX TO CONCRETE PEDESTAL POST

SECTION VIII

BILL OF QUANTITIES and ATTACHMENTS

SECTION VIII – BILL OF QUANTITIES

TABLE OF CONTENTS

		PAGE
1.	1a Bid Summary	1-1
	1b Bill of Quantities	1
2.	Annex 1 (Basis of Payments)	7
3.	Annex 2 (Facilities to be Provided)	15
4.	Annex 3 (Minimum Equipment Requirements)	16
5.	Annex 4 (Construction Safety and Health Requirements)	17
6.	Annex 5 (Minimum Testing Requirements)	18

BID SUMMARY

PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II)

Port of Plaridel, Slain, Quezon

NO.	DESCRIPTION OF WORK	AMOUNT (Pesos)
BILL NO. 1	GENERAL EXPENSES	
BILL NO. 2	REMOVAL, DISPOSAL AND EXCAVATION WORKS	
BILL NO. 3	PORT OPERATIONAL AREA WITH CONTINUOUS RORO RAMP, ACCESS ROAD & STAIRLANDING	
	BID PRICE	

Name of Firm

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Date

BILL OF QUANTITIES
PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II)
Port of Plaridel, Siain, Quezon

NO. (1)	DESCRIPTION OF WORK (2)	UNIT (3)	QTY. (4)	UNIT PRICE (Pesos) (5)	AMOUNT (Pesos) (4) x (5)
BILL NO.	**1 GENERAL EXPENSES**				
1.01	Mobilization, demobilization and cleaning	lot	1		
1.02	Rental of temporary site office and residence for the Engineer and staff	mo.	24		
1.03	Maintain temporary site office and residence for the Engineer and staff	mo.	24		
1.04	Provide Construction Safety and Health Program in the execution of the project.	mo.	24		
	TOTAL FOR BILL NO. 1				

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES
PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II)
Port of Plaridel, Sialn, Quezon

NO. (1)	DESCRIPTION OF WORK (2)	UNIT (3)	QTY. (4)	UNIT PRICE (Pesos) (5)	AMOUNT (Pesos) (4) x (5)
BILL NO.	2 REMOVAL, DISPOSAL AND EXCAVATION WORKS				
2.01	Excavate existing seabed and unsuitable materials	cu.m.	5,550		
2.02	Chip-off portion of existing R.C. Curb, and bollard seat flush to required elevation and smoothen with mortar	cu.m.	4		
2.03	Remove existing mooring bollard and turn over to the authority as directed by the Engineer	set	5		
2.04	Remove existing rubber dock fenders and turn over to the authority as directed by the Engineer	set	6		
2.05	Remove and dispose existing concrete pavement	sq.m.	35		
2.06	Excavate and backfill existing fill materials	cu.m.	238		
2.07	Remove existing security fence and turn over materials with value to the authority	l.m.	14		
	TOTAL FOR BILL NO. 2				

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES
PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II)
Port of Plaridel, Siain, Quezon

NO. (1)	DESCRIPTION OF WORK (2)	UNIT (3)	QTY. (4)	UNIT PRICE (Pesos) (5)	AMOUNT (Pesos) (4) x (5)
BILL NO.	3 PORT OPERATIONAL AREA WITH CONTINUOUS RORO RAMP, ACCESS ROAD & STAIRLANDING				
3.01	Supply and deliver to site 1000mm dia x 14mm thk steel pipe piles including connectors	m.t.	1,464		
3.02	Supply and apply polyurethane protective coating @ 1500 microns DFT	sq.m.	3,443		
3.03	Splicing of steel pipe piles including accessories	set	137		
3.04	Supply and install 9mm thk reinforcing band tip for steel pipe piles	set	137		
3.05	Handle, pitch and drive steel pipe piles	l.m.	4,110		
3.06	Supply and install steel waling and splice plate for the steel pipe piles	kg.	10,185		
3.07	Extraction of clogged materials inside the steel pipe piles	cu.m.	813		
3.08	Supply and place sand filler for steel pipe piles	cu.m.	102		
3.09	Supply and install reinforcing steel cage for the steel pipe piles	kg.	125,061		
3.10	Supply and place 3,500 psi concrete filler inside the steel pipe piles	cu.m.	1,017		
3.11	Supply and deliver to site 450mm x 450mmm PSC Anchor Piles	l.m.	1,680		
3.12	Handle, pitch and drive 450mm x 450mm PSC Anchor Piles	l.m.	1,680		

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES
PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II)
Port of Plaridel, Sta In, Quezon

NO. (1)	DESCRIPTION OF WORK (2)	UNIT (3)	QTY. (4)	UNIT PRICE (Pesos) (5)	AMOUNT (Pesos) (4) x (5)
3.13	Splicing of 450 x 450mm anchor piles	no.	42		
3.14	Chipping/cutting of newly driven PSC Anchor Piles	no.	42		
3.15	Supply and place 3,500 psi concrete for the retaining wall, wing wall, rc curb, rc ditch, mooring block, anchor pile wall, anchor block, stair landing & box culvert	cu.m.	1,407		
3.16	Supply and install steel reinforcement for the retaining wall, wing wall, rc curb, rc ditch, mooring block, anchor pile wall, anchor block, stair landing & box culvert	kg.	95,515		
3.17	Supply and place gravel bedding	cu.m.	18		
3.18	Supply and place 50-100 kg. Core rocks	cu.m.	20,399		
3.19	Supply and place 2-layer of 1000 kg. armour rocks	cu.m.	5,898		
3.20	Supply and install tie-rod of various sizes including accessories				
	a) 32mm Ø x 17.00m	set	10		
	b) 50mm Ø x 17.00m	set	134		
3.21	Supply and install geotextile fabric	sq.m.	6,333		
3.22	Supply and place sand and gravel fill	cu.m.	16,419		
3.23	Supply, spread and compact aggregate sub base course	cu.m.	4,989		
3.24	Supply, spread and compact aggregate base course	cu.m.	844		

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES
PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II)
Port of Plaridel, Sta In, Quezon

NO. (1)	DESCRIPTION OF WORK (2)	UNIT (3)	QTY. (4)	UNIT PRICE (Pesos) (5)	AMOUNT (Pesos) (4) x (5)
3.25	Construct portland cement concrete pavement (300mm thk) including dowel bars and construction joint	sq.m.	3,619		
3.26	Construct reinforced concrete pavement (300mm thk) for continuous roro ramp on fill including steel reinforcement	cu.m.	180		
3.27	Supply and lay reinforced concrete pipe including sand bedding				
	a) 600mm diameter	l.m.	82		
	b) 1,070mm diameter	l.m.	96		
3.28	Construct catch drain manhole and other accessories	no.	6		
3.29	Supply, fabricate and install 20mm thk. ASTM A572 Grade 50 Plate Machine bended including dowel bars and accessories	set	37		
3.30	Supply and deliver to site rubber dock fender (V-type, 500H x 2000L) Including accessories	set	18		
3.31	Install rubber dock fender and accessories	set	18		
3.32	Supply and deliver to site mooring bollard (35 ton cap, T-head) including accessories	set	5		
3.33	Install mooring bollards (T-head type) and accessories	set	5		

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES
PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II)
Port of Plaridel, Siain, Quezon

NO. (1)	DESCRIPTION OF WORK (2)	UNIT (3)	QTY. (4)	UNIT PRICE (Pesos) (5)	AMOUNT (Pesos) (4) x (5)
3.34	Construct reinforced concrete pedestal, ductbank, and handhole	lot	1		
3.35	Supply deliver and install port lighting system including wires, floodlight steel lamp post, floodlight fixtures and other accessories	lot	1		
3.36	Construct lateral drainage including trench grate, built-up frames, dowels and other accessories	lot	1		
	TOTAL FOR BILL NO. 3				

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BASIS OF PAYMENT FOR WORK ITEMS INCLUDED IN THE PROPOSAL

The work items included in the proposal and the basis of payments are as follows:

BILL NO. 1

GENERAL EXPENSES

Item 1.01 Mobilization, demobilization, and cleaning

The quantity to be paid for shall be the minimum equipment requirement enumerated in the bid documents mobilized, demobilized and cleaning of the site and accepted by the Engineer. The contract lump sum price shall be full compensation for furnishing all materials, labor, equipment, tools and incidentals necessary to mobilize and demobilize all the minimum equipment requirement enumerated in the bid documents including cleaning of the site. Fifty percent (50%) of the total amount shall be payable after the mobilization activity while the remaining (50%) payable after demobilization and cleaning.

Item 1.02 Rental of temporary site office and residence for the Engineer and staff

The quantity to be paid for shall be the actual rental of site office and residence for the engineer and staff and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools and incidentals necessary for the provision of temporary site office and residence for the engineer and staff.

Item 1.03 Maintain temporary site office and residence for the Engineer and staff

The quantity to be paid for shall be the actual services rendered in maintaining the site office and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools and incidentals necessary to complete the maintenance of the temporary site office and residence as well as other expenses such as provision for electric power, telephone bill, potable water supply, janitorial and security services.

Item 1.04 Provide construction safety and Health Program in the execution of the project

The quantity to be paid for shall be the actual implementation of construction safety and health program and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools and incidentals necessary to complete the implementation of the Construction Safety and Health Program, as required and approved by the Department of Labor and Employment (DOLE).

BILL NO. 2

REMOVAL, DISPOSAL AND EXCAVATION WORKS

Item 2.01 Excavate existing seabed and unsuitable materials

The quantity to be paid for shall be the actual volume in cubic meter of existing seabed and unsuitable materials to be excavated in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.02 Chip-off portion of existing R.C. Curb and bollard seat, flush to required elevation and smoothen with mortar

The quantity to be paid for shall be the actual volume in cubic meter of existing R.C. curb and bollard seat to be chipped off, flushed to required elevation and smoothen with mortar including proper disposal of debris in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.03 Remove existing mooring bollard and turn over to the authority as directed by the Engineer

The quantity to be paid for shall be the actual set of existing mooring bollard to be removed as directed by the Engineer, including turnover to the authority in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.04 Remove existing rubber dock fenders and turn over to the authority as directed by the Engineer

The quantity to be paid for shall be the actual set of existing rubber dock fender to be removed as directed by the Engineer, including turnover to the authority in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.05 Remove and dispose existing concrete pavement

The quantity to be paid for shall be the actual area in square meter of existing concrete pavement to be removed, including proper disposal of debris in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.06 Excavate and backfill existing fill materials

The quantity to be paid for shall be the actual volume in cubic meter of existing fill materials to be excavated and backfilled thereafter in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.07 Remove existing security fence and turn over materials with value to the authority

The quantity to be paid for shall be the actual length in linear meter of existing security fence to be removed including turnover of materials with value to the authority in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

BILL NO. 3

PORT OPERATIONAL AREA WITH CONTINUOUS RORO RAMP, ACCESS ROAD AND STAIRLANDING

Item 3.01 Supply and deliver to site 1000mm dia. x 14mm thk. steel pipe piles including connectors

The quantity to be paid for shall be the actual weight in metric ton of 1000mm dia x 14mm thk steel pipe piles including connectors to be supplied and delivered to site in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.02 Supply and apply polyurethane protective coating @ 1500 microns DFT

The quantity to be paid for shall be the actual area in square meter of polyurethane protective coating @ 1500 microns DFT to be supplied and applied on the steel pipe pile surfaces in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.03 Splicing of steel pipe piles including accessories

The quantity to be paid for shall be the actual set of steel pipe piles including accessories to be spliced in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.04 Supply and install 9mm thk reinforcing band tip for steel pipe piles

The quantity to be paid for shall be the actual set of 9mm thk reinforcing band tip to supplied and installed in steel pipe piles in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.05 Handle, pitch and drive steel pipe piles

The quantity to be paid for shall be the actual length in linear meter of steel pipe piles to be handled, pitched, and driven in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for

furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.06 Supply and install steel waling and splice plate for the steel pipe piles

The quantity to be paid for shall be the actual weight in kilogram of steel waling and splice plate to be supplied and installed for the steel pipe piles in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.07 Extraction of clogged materials inside the steel pipe piles

The quantity to be paid for shall be the actual volume in cubic meter of clogged materials inside the steel pipe piles to be extracted in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.08 Supply and place sand filler for steel pipe piles

The quantity to be paid for shall be the actual volume in cubic meter of sand filler to be supplied and placed in steel pipe piles in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.09 Supply and install reinforcing steel cage for steel pipe piles

The quantity to be paid for shall be the actual weight in kilogram of reinforcing steel cage to be supplied and installed in steel pipe piles in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.10 Supply and place 3,500 psi concrete filler inside the steel pipe piles

The quantity to be paid for shall be the actual volume in cubic meter of 3,500 psi concrete filler inside the steel pipe piles to be supplied and set-in-place in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.11 Supply and deliver to site 450mm x 450mm PSC Anchor Piles

The quantity to be paid for shall be the actual length in linear meter of 450mm x 450mm PSC Anchor Piles to be supplied and delivered to site in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.12 Handle, pitch, and drive 450mm x 450mm PSC Anchor Piles

The quantity to be paid for shall be the actual length in linear meter of 450mm x 450mm PSC Anchor Piles to be handled, pitched, and driven in accordance with the plans and specifications and accepted by the Engineers. The contract unit price shall

be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.13 Splicing of 450 x 450mm anchor piles

The quantity to be paid for shall be the actual number of 450 x 450mm anchor piles to be spliced in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.14 Chipping/cutting of newly driven PSC Anchor piles

The quantity to be paid for shall be the actual number of newly driven PSC Anchor piles to be chipped/cut to required elevation including disposal of debris in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.15 Supply and place 3,500 psi concrete for the retaining wall, wing wall, R.C. curb, R.C. ditch, mooring block, anchor pile wall, anchor block, stair landing & box culvert

The quantity to be paid for shall be the actual volume in cubic meter of 3,500 psi concrete to be supplied and set-in-place for the retaining wall, wing wall, R.C. curb, R.C. ditch, mooring block, anchor pile wall, anchor block, stair landing & box culvert in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.16 Supply and install steel reinforcements for the retaining wall, wing wall, R.C. curb, R.C. ditch, mooring block, anchor pile wall, anchor block, stair landing & box culvert

The quantity to be paid for shall be the actual weight in kilogram of steel reinforcements to be supplied and installed for the retaining wall, wing wall, R.C. curb, R.C. ditch, mooring block, anchor pile wall, anchor block, stair landing & box culvert in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.17 Supply and place gravel bedding

The quantity to be paid for shall be the actual volume in cubic meter of gravel bedding to be supplied and set-in-place in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.18 Supply and place 50-100 kg. Core rocks

The quantity to be paid for shall be the actual volume in cubic meter of 50-100 kg. core rocks, supplied and set-in-place in accordance with the plans and specifications and accepted by the Engineer. Hydrographic/Topographic Surveys before and after placing of core rocks shall be made to determine the actual elevations along the cross sections and the actual quantities for payment. Volume due to settlement as established using settlement plates shall also be considered for payment. The contract

unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.19 Supply and place 2-layer of 1000 kg. Armour rocks

The quantity to be paid for shall be the actual volume in cubic meter of 2-layers of 1000 kg. armour rocks, supplied and set-in-place in accordance with the plans and specifications and accepted by the Engineer. Hydrographic/Topographic Surveys before and after placing of armour rocks shall be made to determine the actual elevations along the cross sections and the actual quantities for payment. Volume due to settlement as established using settlement plates shall also be considered for payment. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.20 Supply and install tie-rod of various sizes including accessories
a.) 32mm Ø x 17.00m
b.) 50mm Ø x 17.00m

The quantity to be paid for shall be the actual set of tie-rod of various sizes including accessories to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.21 Supply and install geotextile fabric

The quantity to be paid for shall be the actual area in square meter of geotextile fabric, supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.22 Supply and place sand and gravel fill

The quantity to be paid for shall be the actual volume in cubic meter of sand and gravel fill, supplied and set-in-place in accordance with the plans and specifications and accepted by the Engineer. Hydrographic/Topographic Surveys before and after placing of sand and gravel fill shall be made to determine the actual elevations along the cross sections and the actual quantities for payment. Volume due to settlement as established using settlement plates shall also be considered for payment. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.23 Supply, spread, and compact aggregate sub-base course

The quantity to be paid for shall be the actual volume in cubic meter of aggregate sub-base course to be supplied, spread, and compacted in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.24 Supply, spread and compact aggregate base course

The quantity to be paid for shall be the actual volume in cubic meter of aggregate base course to be supplied, spread, and compacted in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full

compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.25 Construct Portland cement concrete pavement (300mm thick) including dowel bars and construction joint

The quantity to be paid for shall be the actual area in square meter of Portland cement concrete pavement (300mm thick) including dowel bars and construction joint to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.26 Construct reinforced concrete pavement (300mm thick) for continuous roro ramp on fill including steel reinforcement

The quantity to be paid for shall be the actual volume in cubic meter of reinforced concrete pavement (300mm thick) for continuous roro ramp on fill including steel reinforcement to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.27 Supply and lay reinforced concrete pipe including sand bedding
a.) 600mm diameter
b.) 1070mm diameter

The quantity to be paid for shall be the actual length in linear meter of reinforced concrete pipe of various diameter including sand bedding to be supplied and laid in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.28 Construct catch drain manhole and other accessories

The quantity to be paid for shall be the actual number of catch drain manhole and other accessories to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.29 Supply, fabricate and install 20mm thk. ASTM A572 Grade 50 Plate Machine Bended including dowel bars and accessories

The quantity to be paid for shall be the actual set of 20mm thk. ASTM A572 Grade 50 Plate Machine Bended including dowel bars and accessories to be supplied, fabricated and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.30 Supply and deliver to site rubber dock fender (V-type, 500H x 2000L) including accessories

The quantity to be paid for shall be the actual set of rubber dock fenders (V-type, 500H x 2000L) including accessories, supplied and delivered to site in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall

be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.31 Install rubber dock fender and accessories

The quantity to be paid for shall be the actual set of rubber dock fenders and accessories, installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.32 Supply and deliver to site mooring bollard (35 ton cap, T-head) including accessories

The quantity to be paid for shall be the actual set of mooring bollards (35 ton cap, T-head) including accessories, supplied, and delivered to site in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.33 Install mooring bollards (T-head type) and accessories

The quantity to be paid for shall be the actual set of mooring bollards (T-head type) and accessories, installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.34 Construct reinforced concrete pedestal, duct bank, and handhole

The quantity to be paid for shall be the actual lot of reinforced concrete pedestal, duct bank, and handhole for electrical works to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.35 Supply, deliver and install port lighting system including wires, floodlight steel lamp post, flood light fixtures and other accessories

The quantity to be paid for shall be the actual lot of port lighting system including wires, floodlight steel lamp post, flood light fixtures and other accessories to be supplied, delivered, and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.36 Construct lateral drainage including trench grate, built-up frames, dowels and other accessories

The quantity to be paid for shall be the actual lot of lateral drainage including trench grate, built-up frames, dowels and other accessories to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

FACILITIES TO BE PROVIDED FOR THE ENGINEER & HIS STAFF

RENTAL OF SITE OFFICE AND RESIDENCE FOR THE ENGINEER & STAFF

The Contractor shall provide a temporary site office and residence (rental) with an area of at least 48 square meters for use of the Engineer and his staff for the whole duration of the project.

MINIMUM MAJOR EQUIPMENT REQUIREMENTS

1	unit/s	Air Compressor (250 cfm, minimum), owned
1	unit/s	Backhoe (0.50 cu.m., 94.30hp, minimum), owned/leased
2	unit/s	Centrifugal Trash pumps, owned/leased
1	unit/s	Clamshell, owned
1	unit/s	Concrete cutter, owned, owned
2	unit/s	Concrete Mixer (1 bagger, minimum), owned
1	unit/s	Concrete bucket, owned
1	unit/s	Concrete Screeder, owned
2	unit/s	Concrete Vibrator (3.5 hp, minimum), owned
1	unit/s	Crane Barge (319 GW, minimum) with 60T crane, owned/leased
1	unit/s	Crawler Crane (30T, minimum), owned/leased
1	unit/s	Crawler Crane (20T, minimum), owned/leased
1	unit/s	Pile Hammer (Diesel, 10,500 - 16,000 kg.m. or hydraulic equivalent), owned
1	unit/s	Pile Hammer (Diesel, 6,500 -10,500kg.m. or hydraulic equivalent), owned
1	unit/s	Drop Hammer (2T, minimum), owned
1	unit/s	Dump Truck (7 Tons net capacity, minimum), owned/leased
4	unit/s	Bar Bender (electric, 25mm dia min.), owned
4	unit/s	Bar Cutter (electric, 25mm dia min.), owned
1	unit/s	Jackhammer, owned
2	unit/s	Oxy/Acetylene cutting outfit, owned
1	unit/s	Payloader (110 hp, minimum), owned/leased
1	unit/s	Plate Compactor (5 hp, minimum), owned
1	unit/s	Road Grader (125 hp, minimum), owned/leased
1	unit/s	Road Roller (10T, vibratory, minimum), owned/leased
2	unit/s	Transit Mixer (8.50 cu.m./hr. cap., minimum), owned/leased
1	unit/s	Tugboat (500hp, minimum), owned/leased
1	unit/s	Water Truck with pump (1,000 gal., minimum), owned
2	unit/s	Welding Machine (400 amp., minimum), owned
1	unit/s	Cargo Truck (2T net capacity, min.) , owned

CONSTRUCTION SAFETY AND HEALTH REQUIREMENT

The Contractor shall implement the construction safety and health program in accordance with the applicable provisions of the Occupational Safety and Health Standards (OSHS) of the Department of Labor and Employment (DOLE).

The Contractor, subject to the approval of the Engineer shall provide and maintain throughout the duration of the contract a medical room with at least 15 square meters together with all necessary supplies to be sited in the Contractor's main area.

The Contractor shall provide the following minimum requirements:

L A B O R

1	no.	Safety Engineer / Officer
1	no.	Nurse / Health Officer

EQUIPMENT / MATERIALS

Personnel Protective Equipment

51	pc.	Hard Hats
51	pc.	Gloves (rubberized)
51	pc.	Safety Glasses/Goggles (clear)
102	pc.	Long sleeve T-shirt
8	pc.	Aprons
4	pc.	Safety Belts
51	pair	Safety Shoes
4	set	Life Lines

Safety Devices

1	lot	Barricades
1	lot	Warning signs (Signages)
2	unit/s	Fire extinguisher (10kg)

Medical and First Aid System - Twenty-two (24) mos.

NOTE:

The Contractor shall provide the above-cited minimum construction safety and health requirements or as required by the Engineer.

PPA MEMORANDUM CIRCULAR
No 02
Series of 2016
Attachment

REVISED SCHEDULE OF MINIMUM TEST REQUIREMENTS OF CONSTRUCTION MATERIALS FOR PPA INFRASTRUCTURE PROJECTS

Materials/Items of Work	*Required Tests*	*Minimum Incremental Frequency of Tests*
I. Construction of Pier/Wharf, Platform and Ramp		
Structural Concrete (SC)		
A Portland Cement	Quality Test	For every 2,000 bags (40kg) or fraction thereof
B Fine Aggregate	Quality Test for Grading, Elutriation (wash), Bulk Specific Gravity, Absorption, Mortar Strength, Soundness, Organic Impurities, Unit Weight, % Clay Lumps and Shale	For every 1,500 cubic meter or fraction thereof
C Coarse Aggregate	Quality Test for Grading, Bulk Specific Gravity, Absorption and Abrasion	For every 1,500 cubic meter or fraction thereof
D Water	Certificate from the Engineer or Quality Test for Density and Chloride Content	One per source
E Steel Bars	Mill Certificate and Quality Test for Chemical Composition and Mechanical Properties	For every 10,000 kg or fraction thereof
F Concrete	Compressive Strength on cylinder samples	1 set consisting of 3 concrete cylinder samples shall be taken from each day's pouring and to represent not more than 75 cu m of concrete or fraction thereof
	Slump Test	For every mix
G Admixture and Concrete Curing Materials	Quality Test	One per shipment
Piling (P)		
A Concrete Piles	Fabrication Report	One per fabrication
1 Concrete	Same test as for SC (F)	Same frequency as SC (F)
2 Steel Bars	Same test as for SC (E)	Same frequency as SC (E)
3 High Tension Strand	Test for Chemical Composition and Mechanical Properties	For every 20000kg or fraction thereof

PPA MEMORANDUM CIRCULAR
No 02
Series of 2015
Attachment

Materials/Items of Work	Required Tests	Minimum Incremental Frequency of Tests
4 Coarse Aggregates	Same Test as for SC (C)	Same frequency as SC (C)
5 Fine Aggregates	Same Test as for SC (B)	Same frequency as SC (B)
B Steel Pipe Piles	Fabrication Report, Mill Certificate and Quality Test for Chemical and Mechanical properties	One per fabrication
1 Steel	Chemical Composition (refer below)	
	- Under 14" (355 60mm) Outside Diameter	2 from 200 pipe of fraction thereof
	- 14" to 36" (355 6 to 914mm) Outside Dia	2 from 100 pipe or fraction thereof
	- Over 36" (914mm) Outside Diameter	2 from 3000ft (914m) or fraction thereof
	Mechanical/Tensile	One (1) tension test shall be made on one length or fraction thereof of each size, or one piece of skelp representing each lot of 200 lengths or fraction thereof of each size
2 Polyurethane Coating	Mill Certificate and Quality Test	One per fabrication
3 Concrete	Same test as for SC (F)	Same frequency as SC (F)
4 Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)
5 Coarse Aggregate	Same test as for SC (C)	Same frequency as SC (C)
6 Steel Bars	Same Test as SC (E)	Same frequency as SC (E)
7 Water	Same Test as SC (D)	Same frequency as SC (D)
Rubber Dock Fenders (RDF)	Physical Test	All units
	Performance Test for Energy Absorption and Reaction Force	All units
Accessories		
Washer and Fixing Bolt, Anchor Bolt	Physical Test	All units
	Quality Test for Chemical Composition and Mechanical Properties	One per fabrication

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
Mooring Bollard (MB) and Accessories (Hexagon Nuts, Plain Washer, Anchor Ring and Anchor Bolt)	Physical Test Quality Test for Chemical Composition and Mechanical Properties	All Units One per fabrication
II. Construction of Back-Up Area, Causeway and Pavement		
Sheet Piling (SP)		
A Concrete Sheet Piles		
1 Concrete	Same test as for SC (F)	Same frequency as SC (F)
2 Steel Bars	Same test as for SC (E)	Same frequency as SC (E)
3 High Tension Strands	Same test as for P (A 3)	Same frequency as P (A 3)
4 Fine Aggregates	Same test as for SC (B)	Same frequency as SC (B)
5 Coase Aggregates	Same Test as for SC (C)	Same frequency as SC (C)
B Steel Pipe Piles		
1 Steel	Same test as for P (B1)	Same frequency as P (B1)
2 Concrete	Same test as for SC (F)	Same frequency as SC (F)
3 Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)
4 Steel Bars	Same test as for SC (E)	Same frequency as SC (E)

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
Rocks	Test for Apparent Specific Gravity and Abrasion	For every 1,500 cubic meter or fraction thereof
Geotextile Filter	Physical and Mechanical Test Mill Certificate	One per batch One per batch
Sand and Gravel Fill	Quality Test for Organic Impurities and Grading	For every 1,500 cubic meter or fracbon thereof
Selected Fill	Quality Test for Grading, Plasticity and Laboratory Compaction Test Laboratory California Bearing Ratio (CBR) Field Density Test	For every 1,500 cubic meter or fracbon thereof For every 2,500 cubic meter or fraction thereof For every layer of 150mm of compacted depth at least one group of three In-situ density test for every 500 sq m or fraction thereof
Aggregate Base Course	Quality Test for Grading and Plasticity Quality Test for Grading, Plasticity, Abrasion and Laboratory Compaction Test Laboratory California Bearing Ratio (CBR) Field Density Test	For every 300 cubic meter or fraction thereof For every 1,500 cubic meter or fraction thereof Same frequency as Selected Fill Same frequency as Selected Fill
Portland Cement Concrete Pavement (PCCP)		
A Portland Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)
C Coarse Aggregate	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Steel Bars (Dowels)	Same test as for SC (E)	Same frequency as SC (E)
F Joint Filler	Quality Test	One (1) per shipment

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
G Admixture and Concrete Curing Material	Same test as for SC (G)	Same frequency as SC (G)
H Concrete	Same test as for SC (F)	Same frequency as SC (F)
	Flexural Test	3 beam samples for every 330 sq m or fraction thereof
I Completed Pavement	Core Test	1 set (3 specimen) for every 2,500 sq m and fraction thereof
Interlocking Concrete Blocks		
A Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)
C Coarse Aggregate	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Admixture & Concrete Curing Materials	Same test as for SC (G)	Same frequency as SC (G)
F Completed Blocks	Physical Test and Compressive Strength	6 blocks per day of fabrication
Cement Treated Base Course (CTB)		
A Portland Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine & Coarse Aggregates	Quality Test for Grading, Abrasion and Soundness	For every 1,500 cubic meter or fraction thereof
C Water	Same test as for SC (D)	Same frequency as SC (D)
D Completed CTB	Field Density Test	For every layer of 150mm of compacted depth at least one group of three In-situ density test every 500 sq m or fraction thereof
Retaining Wall/Coping Wall/RC Curb/RC Ditch/Shear Key/Concrete Blocks\Lean Concrete		
A Portland Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
C Coarse Aggregates	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Steel Bars	Same test as for SC (E)	Same frequency as SC (E)
F Admixture and Concrete Curing	Same test as for SC (G)	Same frequency as SC (G)
G Concrete	Same test as for SC (F)	Same frequency as SC (F)
Tie Rod A Steel	Same test as for SC (E)	One per batch
B Assembly	Performance Test (Tension)	One per batch
Tie Bars and Dowels	Same test as for SC (E)	For every 10,000 kg or fraction thereof per Tie bars and Dowels
Pipe Culverts and Storm Drains		
A Pipes	Test for Strength, Absorption and Physical	For every 50 pieces
B Mortar or Joint	Same Test as for SC (A,B and D) Alternative Test Same test as for SC (F) and Inspection Report	For every 25 pieces
Concrete Hollow Blocks		
A Portland Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregates	Same test as for SC (B)	Same frequency as SC (B)
C Water	Same test as for SC (D)	Same frequency as SC (C)
D Concrete	Same test as for SC (F)	Same frequency as SC (F)
E Completed CHB	Quality Test	One for every 500 pieces or fraction thereof
Construction Joints (CJ)		
A Angle Bars	Test for Physical and Mechanical Properties	One per batch
B Steel Bars	Same test as for SC (E)	One per batch
C Zinc (Hot Dip Galvanizing) Coatings	Physical Test for Appearance, Stripping, Weighing, Adherence and Adhesion	All units
	Coating Thickness Magnetic Thickness Measurement	1 set (3 specimen) for every 100,000 sq mm or fraction thereof

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
Sacked Concrete		
A Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregates	Same test as for SC (B)	Same frequency as SC (B)
C Coarse Aggregates	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Concrete	Same test as for SC (F)	Same frequency as SC (F)
F Sack (jute)	Physical Test	One for every 50 pieces
Rubble Concrete		
A Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregates	Same test as for SC (B)	Same frequency as SC (B)
C Coarse Aggregates	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Concrete	Same test as for SC (F)	Same frequency as SC (F)
F Rocks	Same test as for ROCKS	Same frequency as ROCKS
Earthworks		
A Sub-grade preparation	Grading Test Plasticity Test (LL,PL,PI) Laboratory Compaction Test	For every 1,500 cubic meter or fraction thereof
	Density Test	For every layer of 150mm of compacted depth at least one group of three In-situ density test every 500 sq m or fraction thereof
B Structure Excavation	If excavated materials shall be used as Backfill Grading Test Plasticity Test (LL,PL,PI) Laboratory Compaction Test	For every 1,500 cubic meter or fraction thereof
	Density Test	For every layer of 150mm of compacted depth at least one group of three In-situ density test every 500 sq m or fraction thereof

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
III Port Operations Building/Passenger Terminal Building/Transit Shed/Warehouse		
STRUCTURAL WORKS	Refer to Structural Concrete (SC) and Piling Works (P)	
ARCHITECTURAL WORKS		
Ceramic – Filled Liquid Membrane / Water Proofing, Hydrophobic Poreblocking Ingredients with Superplasticizer	Physical Property, Mechanical and Chemical Property, Leak Test / Flood Test	One per shipment
Paint	Quality Test	One 4-L can for every 100 cans or fraction thereof
Ceramic Tile	Inspection and Evaluation Report from the Engineer	One per shipment
Stainless Steel	Inspection and Evaluation Report from the Engineer	One per shipment
Roofing Materials	Inspection and Evaluation Report from the Engineer	One per shipment
Ceiling Materials	Inspection and Evaluation Report from the Engineer	One per shipment
ELECTRICAL AND MECHANICAL WORKS		
Wires / Cables	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per shipment
Electrical Devices	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per shipment
Fire Alarm System	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Wiring Devices	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per shipment

Materials/Items of Work	Required Tests	Minimum Incremental Frequency of Tests
Protective Devices	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per shipment
Telephone System	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
CCTV System	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
CATV System	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Background Music and Paging System	Inspection and Evaluation Report from the Engineer, Testing and Commissioning	One per item
Air Conditioning Units & Ventilation	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Conduit Pipes	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Lighting Fixtures	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
PLUMBING WORKS		
Pipes	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item

PPA MEMORANDUM CIRCULAR
No 02
Series of 2016
Attachment

Materials/Items of Work	Required Tests	Minimum Incremental Frequency of Tests
Fixtures	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Pipe Culverts	Compression Strength Inspection and Evaluation Report from the Engineer	For every size not more than 25 pipes cast in the field
IV Miscellaneous Materials Fencing A Barbed Wire, Cyclone Wire Mesh, Chain Link	Physical Test (Dimensions and Coatings)	One per Batch
B Concrete Post	Refer to Superstructure (SC)	Refer to Superstructure (SC)
Lamp Post A Structural Steel	Physical Test (Dimensions) Same test as for SC (E)	All units
B Zinc (Hot Dip Galvanizing) Coatings	Same test as for CJ (C)	One per batch
Drainage Steel Grating	Same test as for SC (E) Inspection Report	One (1) batch
Metal Pipe (Cast Iron Galvanized, etc)	Physical Test (Dimensions and Coatings)	1 per delivery
Welding Works	Destructive and Non Destructive Test	One (1) per lot

NOTES
1. **Testing of RDF shall be performed only by an independent Testing Laboratory duly accredited by BRS, DOST and PPA**
2. **Testing of other materials shall be performed only by an independent Testing Laboratory duly accredited by BRS and PPA.**
3. **All other issuances which are otherwise inconsistent herewith are hereby revoked or otherwise amended.**

Approved

RAUL T. SANTOS
Officer-In-Charge,
Office of the General Manager

SECTION IX

BID RELATED FORMS

SECTION IX – BID RELATED FORMS

TABLE OF CONTENTS

		PAGE
1.	Bid Form	1
2.	Contract Form	3
3.	Omnibus Sworn Statement for Sole Proprietorship	6
4.	Omnibus Sworn Statement for Partnership, Corporation, Cooperative, or Joint Venture	9
5.	Bid Securing Declaration Form	12
6.	Statement of all On-going Government and Private Contracts, including contracts awarded but not yet started	15
7.	Statement of the Bidder's Single Largest Completed Contracts (SLCC) Similar to the Contract to be Bid	16
8.	Experience Record on Similarly Completed Projects	17
9.	Financial Data	18
10.	List of Contractor's Personnel	19
11.	List of Contractor's Equipment Units	20
12.	Construction Methodology	21
13.	Manpower Schedule	22
14.	Equipment Utilization Schedule	23
15.	Cash Flow by Quarter and Payment Schedule	24

Bid Form for the Procurement of Infrastructure Projects

[shall be submitted with the Bid]

BID FORM

Date : _____
Project Identification No. : _____

To: **Philippine Ports Authority**
PPA Building, Bonifacio Drive,
South Harbor, Port Area, Manila

Having examined the Philippine Bidding Documents (PBDs) including the Supplemental Bid Bulletin Numbers _____, the receipt of which is hereby duly acknowledged, we, the undersigned, declare that:

a. I/We have no reservation to the PBD, including the Supplemental Bid Bulletins, for the Procurement Project: **Plaridel Port Development/Improvement Project (Phase II), Port of Plaridel, Siain, Quezon;**

b. I/We offer to execute the Works for this Contract in accordance with the PBD;

c. The total price of our Bid in words and figures, excluding any discount offered below, is: _____;

d. The discounts offered and the methodology for their application, if any, are: _____;

e. The total bid price in words and figures, after applying the applicable discount, includes the cost of all taxes, such as, but not limited to[specify the applicable taxes, e.g. (i) value added tax (VAT), (ii) income tax, (iii) local taxes, and (iv) other fiscal levies and duties], which are itemized in the Detailed Estimates.

f. This Bid shall remain valid within a period stated in the PBD, and it shall be binding upon me/us at any time before the expiration of that period;

g. If our bid is accepted, I/we commit to enter to a contract and provide a performance security in the form, amounts, and within the times prescribed in the PBD, and hereby acknowledge the consequences under the IRR of RA No. 12009 on forfeiture of Bid Security or enforcement of Bid Securing Declaration and on Blacklisting;

Until a formal Contract is prepared and executed, this Bid, together with your written acceptance thereof and your Notice of Award, shall be binding upon the Bidder.

I/We understand that you are not bound to accept the Lowest Calculated Bid or any Bid you may receive.

I/We certify/confirm that we comply with the eligibility requirements pursuant to the PBD.

The undersigned is authorized to submit the bid on behalf of **[Name of the Bidder]** as

evidenced by the attached *[State the Written Authority]*.

I/We acknowledge that failure to sign each and every page of this Bid Form, including the attached Schedule of Prices, shall be a ground for the rejection of our bid.

Duly authorized to sign the Bid for and behalf of:

[Insert Bidder's Name]

[Signature over Printed Name]
[Position/Designation]

[Date]

Contract Form

[not required to be submitted with the Bid, but it shall be submitted within ten (10) days after receiving the Notice of Award]

CONTRACT FOR [INSERT PROJECT TITLE]

THIS CONTRACT executed on the _____ day of _____ 20_____ between:

Philippine Ports Authority, a government agency of the Republic of the Philippines, hereinafter called "the Entity";

-and-

[Name of Contractor], Filipino of legal age or a company duly organized and existing under the laws of **[city and country]**, with principal office at **[name and address of Contractor]**, hereinafter called "the Contractor".

WHEREAS, the Entity invited Bids for certain goods and ancillary services, particularly *[Brief description of Project]*;

WHEREAS, the Contractor submitted a responsive bid and was awarded the contract for the procurement in the total amount of **[contract price in words and figures in specified currency]**, hereinafter referred to as the "Contract Price."

NOW, THEREFORE, for and in consideration of the foregoing premises, the parties hereby agree as follows:

1) Unless otherwise stated, terms and expressions used in this Contract shall have the same meanings as those assigned to them in the Conditions of Contract, which form an integral part of this Contract.

2) The following documents as required by the Implementing Rules and Regulations of Republic Act No. 12009 shall be deemed to form and be read and construed as integral part of this Contract, *viz.*:

   a) Philippine Bidding Documents (PBD);

      i. Drawings/Plans;
      ii. Scope of Work;
      iii. Invitation to Bid;
      iv. Instructions to Bidders;
      v. Bid Data Sheet;
      vi. Bid Form, including all the documents/statements contained in the Bidder's bidding envelopes, as annexes, and all other documents submitted (e.g., Bidder's response to request for clarifications on the bid), including corrections to the bid, if any, resulting from the Procuring Entity's bid evaluation;
      vii. Bill of Quantities;
      viii. General and Special Conditions of Contract;
      ix. Supplemental Bid Bulletins, if any; and
      x. Other contract documents that may be required by existing laws and/or the Entity.

   b) Winning bidder's bid, including the Eligibility Requirements, Technical and Financial Proposals, and all other documents or statements submitted;

c) Performance Security;

d) Notice of Award of Contract; and the Bidder's Conforme thereto; and

e) Other contract documents that may be required by existing laws and/or the Procuring Entity concerned in the PBD, such as but not limited to the Notice to Proceed and Warranty Security.

3) In consideration of the Contract Price of **[total contract price in words and figures]**, or such other sums as may be determined in accordance with the terms of the Contract, the Supplier agrees to deliver and perform the items and related services for the **[Project Title]** described herein in accordance with the terms and conditions specified in the Contract and its annexed documents.

4) The **Philippine Ports Authority** agrees to pay the above-mentioned sum to the Supplier in accordance with the schedule and manner provided in the Bidding Documents and its annexes.

5) Any dispute, difference, or claim arising out of or relating to this Contract, including its existence, validity, interpretation, breach, or termination thereof, may be submitted to arbitration or other form of alternative dispute resolution in accordance with the applicable law, such as Republic Act (RA) No. 9285 (Alternative Dispute Resolution Act of 2004) or Executive Order No 1008, series 1985 (Construction Industry Arbitration Law).

IN WITNESS WHEREOF, the parties hereto have caused this Contract to be executed in accordance with the laws of the Republic of the Philippines on the day and year first above written

For the Procuring Entity Head of the Procuring Entity or Duly Authorized Representative	*For the Bidder* Duly authorized to sign the Contract for and behalf of *[Bidders Name]*:
[Signature over Printed Name][Position/Designation] *[Date]*	*[Signature over Printed Name]* *[Position/Designation]* *[Date]*
[Name and Signature] *Witness – Procuring Entity*	*[Name and Signature]* *Witness- Supplier*

ACKNOWLEDGMENT

BEFORE ME, A Notary Public for and in the _____, City/Province of _____, this _____ day of _____, 20_____, personally appeared the above-named persons who have satisfactorily proven to me their identity, through their identifying documents written below their names and signatures, that they are the same persons who executed and voluntarily signed the foregoing instrument consisting of ____ pages, including this page where this Acknowledgement is written, which they acknowledged before me as their free and voluntary act and deed.

WITNESS MY HAND AND SEAL this ___ day of *[month] [year].*

NAME OF NOTARY PUBLIC
Notarial Commission No. _____
Notary Public for _____ until _____
Roll of Attorneys No. _____
PTR No. __, *[date issued], [place issued]*
IBP No. __, *[date issued], [place issued]*

Doc. No. _____
Page No. _____
Book No. _____
Series of _____

Omnibus Sworn Statement for Sole Proprietorship

[Note: The duly accomplished form shall be submitted with the Bid]

REPUBLIC OF THE PHILIPPINES)
CITY/MUNICIPALITY OF _____) S.S.

OMNIBUS SWORN STATEMENT

I, _____, of legal age, [Civil Status], [Nationality], and with residence at _____, after having been duly sworn in accordance with law, do hereby depose and state that:

1. I am the sole proprietor or authorized representative of _____ with office address at _____;

2. As the owner and sole proprietor or authorized representative of _____, I have full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for **Plaridel Port Development/Improvement Project (Phase II), Port of Plaridel, Siain, Quezon,** of the **Philippine Ports Authority**, [insert "as supported by the attached duly notarized Special Power of Attorney" for authorized representative];

3. **[Name of Bidder]** is not "blacklisted" or barred from bidding by the Government of the Philippines or any of its agencies, offices, corporations, or Local Government Units, foreign government/foreign or international financing institution whose blacklisting rules have been recognized by the Government Procurement Policy Board; by itself or by relation, membership, association, affiliation, or controlling interest with another blacklisted person or entity;

4. Each of the documents submitted in satisfaction of the bidding requirements is an authentic copy of the original, complete, and all statements and information provided therein are true and correct;

5. **[Name of Bidder]** is authorizing the Head of the Procuring Entity or its duly authorized representative(s) to verify all the documents submitted;

6. The **[Name of Bidder]** and its spouse are not related by consanguinity or affinity up to the third civil degree to the Head of the Procuring Entity, Procurement Agent (if engaged), End-User or Implementing Unit, project consultants, head of the Project Management Office, or the members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat;

7. It is understood that failure to faithfully disclose its relationship with the HoPE, members of the BAC, the TWG, and the BAC Secretariat, the head of the PMO or the end-user unit or implementing unit, and the project consultants of the Procuring Entity, or of the procurement agent by consanguinity or affinity up to the third civil degree, as well as its submission of beneficial ownership information containing false entries shall be subject to blacklisting under Section 100 of the IRR of RA No. 12009, without prejudice to criminal and civil liabilities under applicable laws, including their accessory penalties, if any.

8. **[Name of Bidder]** complies with existing labor laws and standards; and

9. **[Name of Bidder]** is aware of and has undertaken the following responsibilities as a Bidder:

a. Carefully examine all of the Bidding Documents;
b. Acknowledge all conditions, local or otherwise, affecting the implementation of the Contract;
c. Made an estimate of the facilities available and needed for the contract to be bid, if any; and
d. Inquire or secure Supplemental Bid Bulletin(s) issued for the [Project Title].

10. *[**Name of Bidder**]* did not give or pay directly or indirectly, any commission, amount, fee, or any form of consideration, pecuniary or otherwise, to any person or official, personnel or representative of the government in relation to any procurement project or activity.

11. In case advance payment was made or given to **[Name of Bidder]**, failure to perform or deliver any of the obligations and undertakings in the contract shall be sufficient grounds to constitute criminal liability under existing laws.

IN WITNESS WHEREOF, I have hereunto set my hand this __ day of ___, 20__ at _____, Philippines.

Duly authorized to sign the Bid for and behalf of:

_____
[Bidder's Name]

[Affiant's Signature over Printed Name]
[Position/Designation]
[Date]

JURAT

SUBSCRIBED AND SWORN to before me this _____ day of *[month] [year]* at *[place of execution]*, Philippines. Affiant/s is/are personally known to me and was/were identified by me through competent evidence of identity as defined in the 2004 Rules on Notarial Practice (A.M. No. 02-8-13-SC). Affiant/s exhibited to me his/her *[insert type of government identification card used]*, with his/her photograph and signature appearing thereon, with no. _____.

WITNESS MY HAND AND SEAL this ___ day of *[month] [year]*.

NAME OF NOTARY PUBLIC
Notarial Commission No. _____
Notary Public for _____ until _____
Roll of Attorneys No. _____
PTR No. __, *[date issued], [place issued]*
IBP No. __, *[date issued], [place issued]*

Doc. No. _____
Page No. _____
Book No. _____
Series of _____.

Omnibus Sworn Statement for Partnership, Corporation, Cooperative, or Joint Venture

[Note: The duly accomplished form shall be submitted with the Bid]

REPUBLIC OF THE PHILIPPINES)
CITY/MUNICIPALITY OF _____) S.S.

OMNIBUS SWORN STATEMENT

I, _____, of legal age, [Civil Status], [Nationality], and with residence at _____, after having been duly sworn in accordance with law, do hereby depose and state that:

1. I am the duly authorized and designated representative of _____ with office address at _____;

2. I am granted full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for **Plaridel Port Development/Improvement Project (Phase II), Port of Plaridel, Siain, Quezon,** of the **Philippine Ports Authority**, as supported by the attached duly notarized Special Power of Attorney, Board/Partnership Resolution, or Secretary's Certificate, whichever is applicable;

3. **[Name of Bidder]** is not "blacklisted" or barred from bidding by the Government of the Philippines or any of its agencies, offices, corporations, or Local Government Units, foreign government/foreign or international financing institution whose blacklisting rules have been recognized by the Government Procurement Policy Board; by itself or by relation, membership, association, affiliation, or controlling interest with another blacklisted person or entity;

4. Each of the documents submitted in satisfaction of the bidding requirements is an authentic copy of the original, complete, and all statements and information provided therein are true and correct;

5. **[Name of Bidder]** is authorizing the Head of the Procuring Entity or its duly authorized representative(s) to verify all the documents submitted;

6. Select one, delete the others:

    - *If partnership:* The partnership itself and the partners of [Name of Bidder] are not related by consanguinity or affinity up to the third civil degree to the Head of the Procuring Entity, Procurement Agent (if engaged), End-User or Implementing Unit, project consultants, head of the Project Management Office, or the members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat;

    - *If cooperative:* The cooperative itself and members of the board of directors, general manager, or chief executive officer of [Name of Bidder] are not related by consanguinity or affinity up to the third civil degree to the Head of the Procuring Entity, Procurement Agent (if engaged), End-User or Implementing Unit, project consultants, head of the Project Management Office, or the members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat;

    - *If corporation, or joint venture:* The corporation or joint venture itself, and officers,

directors, and controlling stockholders of [Name of Bidder] are not related by consanguinity or affinity up to the third civil degree to the Head of the Procuring Entity, Procurement Agent (if engaged), End-User or Implementing Unit, project consultants, head of the Project Management Office, or the members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat;

7. It is understood that failure to faithfully disclose its relationship with the HoPE, members of the BAC, the TWG, and the BAC Secretariat, the head of the PMO or the end-user unit or implementing unit, and the project consultants of the Procuring Entity, or of the procurement agent by consanguinity or affinity up to the third civil degree, as well as its submission of beneficial ownership information containing false entries shall be subject to blacklisting under Section 100 of the IRR of RA No. 12009, without prejudice to criminal and civil liabilities under applicable laws, including their accessory penalties, if any.

    - *In case of corporations:* **[Name of Bidder]** declares its beneficial ownership information consistent with its updated General Information Sheet or Beneficial Ownership Declaration Form or any other document duly submitted to the SEC and has maintained a valid and updated file therein in compliance with Sections 20.2.9.1, 81, and 82 of the IRR of Republic Act (RA) No. 12009.

8. **[Name of Bidder]** complies with existing labor laws and standards; and

9. **[Name of Bidder]** is aware of and has undertaken the following responsibilities as a Bidder:

    a. Carefully examine all of the Bidding Documents;
    b. Acknowledge all conditions, local or otherwise, affecting the implementation of the Contract;
    c. Made an estimate of the facilities available and needed for the contract to be bid, if any; and
    d. Inquire or secure Supplemental Bid Bulletin(s) issued for the [Project Title].

10. **[Name of Bidder]** did not give or pay directly or indirectly, any commission, amount, fee, or any form of consideration, pecuniary or otherwise, to any person or official, personnel or representative of the government in relation to any procurement project or activity.

11. In case advance payment was made or given to **[Name of Bidder]**, failure to perform or deliver any of the obligations and undertakings in the contract shall be sufficient grounds to constitute criminal liability under existing laws.

IN WITNESS WHEREOF, I have hereunto set my hand this __ day of ___, 20__ at _____, Philippines.

Duly authorized to sign the Bid for and behalf of:

[Insert Bidder's Name]

[Affiant's Signature over Printed Name]
[Position/Designation]
[Date]

JURAT

SUBSCRIBED AND SWORN to before me this _____ day of *[month] [year]* at *[place of execution]*, Philippines. Affiant/s is/are personally known to me and was/were identified by me through competent evidence of identity as defined in the 2004 Rules on Notarial Practice (A.M. No. 02-8-13-SC). Affiant/s exhibited to me his/her *[insert type of government identification card used]*, with his/her photograph and signature appearing thereon, with no. _____.

WITNESS MY HAND AND SEAL this ___ day of *[month] [year]*.

NAME OF NOTARY PUBLIC
Notarial Commission No. _____
Notary Public for _____ until _____
Roll of Attorneys No. _____
PTR No. __, *[date issued], [place issued]*
IBP No. __, *[date issued], [place issued]*

Doc. No. _____
Page No. _____
Book No. _____
Series of _____.

Bid Securing Declaration Form

[The duly accomplished form shall be submitted with the Bid if bidder opts to provide this type of bid security]

REPUBLIC OF THE PHILIPPINES)
CITY OF _____) S.S.

BID SECURING DECLARATION

Project Identification No.: _____

To: **Philippine Ports Authority**
PPA Building, Bonifacio Drive,
South Harbor, Port Area, Manila

I/We, the undersigned, declare that:

1. I/We understand that, according to your conditions, bids must be supported by a Bid Security, which may be in the form of a Bid Securing Declaration.

2. I/We accept that:

   a. I/We shall enter into contract with the Procuring Entity and furnish the required performance security within ten (10) calendar days as indicated in the Bidding Documents, from receipt of the Notice of Award;

   b. I/we will be automatically disqualified from bidding for any procurement contract with any Procuring Entity upon receipt of your Blacklisting Order; and

   c. I/We will pay the applicable fine within fifteen (15) days from receipt of the written demand by the Procuring Entity for the commission of acts resulting to the enforcement of the Bid Securing Declaration under Sections 52.2 (a), 63.2, 69.1 and 100, except 100.3 (c), of the IRR of RA No. 12009; without prejudice to other legal action the government may undertake;

	Applicable Fine
a) in the case of a single bidder	i) two percent (2%) of the Approved Budget for the Contract (ABC); *or* ii) the difference between the evaluated bid price and the ABC whichever is higher
b) in the case of multiple bidders	i) two percent (2%) of the ABC; or ii) the difference between the evaluated bid prices with the bidder with Lowest Calculated/Highest Rated Bid and the bidder with the next Lowest Calculated/Highest Rated Bid,

	and so on whichever is higher
c) in case of violations committed prior to the opening of the financial envelope	i) a fixed amount of two percent of the ABC,

3. I/We understand that this Bid Securing Declaration shall cease to be valid on the following circumstances:

   a. Upon expiration of the bid validity period, or any extension thereof pursuant to your request;
   b. I am/we are declared ineligible or post-disqualified upon receipt of your notice to such effect, and (i) I/we failed to timely file a request for reconsideration or (ii) I/we filed a waiver to avail of said right; and
   c. I am/we are declared the bidder with the Lowest Calculated Responsive Bid, and I/we have furnished the performance security and signed the Contract.

IN WITNESS WHEREOF, I/We have hereunto set my/our hand/s this ____ day of *[month] [year]* at *[place of execution]*.

Duly authorized to sign the Bid for and behalf of:

[Insert Bidder's Name]

[Signature over Printed Name]
[Position/Designation]
[Date]

JURAT

SUBSCRIBED AND SWORN to before me this _____ day of *[month] [year]* at *[place of execution]*, Philippines. Affiant/s is/are personally known to me and was/were identified by me through competent evidence of identity as defined in the 2004 Rules on Notarial Practice (A.M. No. 02-8-13-SC). Affiant/s exhibited to me his/her *[insert type of government identification card used]*, with his/her photograph and signature appearing thereon, with no. _____.

WITNESS MY HAND AND SEAL this ___ day of *[month] [year]*.

NAME OF NOTARY PUBLIC
Notarial Commission No. _____
Notary Public for _____ until _____
Roll of Attorneys No. _____
PTR No. __, *[date issued], [place issued]*
IBP No. __, *[date issued], [place issued]*

Doc. No. _____
Page No. _____
Book No. _____
Series of _____

STATEMENT OF THE BIDDER'S ALL ONGOING GOVERNMENT AND PRIVATE CONTRACTS, INCLUDING CONTRACTS AWARDED BUT NOT YET STARTED

I hereby declare that all ongoing contracts, including awarded contracts yet to be started coinciding with the contract to be bid are listed below:

Name of outstanding Contracts 1]	Owner's Name and Address	Scope of Work 2]	Contractor's Role and Percentage of Participation 3]	Total Contract Amount or Value 4]	Date of Contract and NOA 5]	Value of Outstanding Works 6]	Accomplishment (in percentage, %) 7]		Contract Duration 8]	
							Planned	Actual	Start of Project	Estimated Completion Date
A) Government Contracts										
i. On-going										
ii. Awarded but not yet started										
B) Private Contracts										
i. On-going										
ii. Awarded but not yet started										

NOTE:

1] As appearing in the contract executed by the parties.
2] With special reference to the Scope of Works of the Project as described/enumerated in the Contract.
3] Indicate the percentage of participation and whether as Sole Contractor, Sub-Contractor or Member in a Joint Venture / Consortium.
4] Indicate the FOREX used if Contract Value is expressed in a currency other than the Philippine Peso.
5] As appearing in the Contract and Notice of Award (NOA).
6] Amount or value of all outstanding or uncompleted portions of the projects under ongoing contracts, including awarded contracts yet to be started coinciding with the contract to be bid.
7] Percentage of Accomplishment as of the preceding month which should not be earlier than two (2) months from the date of bid submission.
8] As appearing in the Notice to Proceed and Contract.

This Statement shall be supported by:

a) Notice of Award
b) Notice to Proceed and Contract

Name of Firm	Name of Bidder/Authorized Representative (Signatory's Legal Capacity)	Date

Revised: September 2021

STATEMENT OF THE BIDDER'S SINGLE LARGEST COMPLETED CONTRACT (SLCC) SIMILAR TO THE CONTRACT TO BE BID

Name of the completed Contract 1]	Owner's Name and Address	Scope of Work 2]	Contractor's Role and Percentage of Participation 3]	Total Contract Value At 4]			Date of Award 5]	Contract Duration 6]	
				Award	Completion	Escalated Value to Present Prices		Start	Completed

NOTE :

1] As appearing in the contract executed by the parties.
2] With special reference to the Scope of Works of the Project as described/enumerated in the Contract.
3] Indicate the percentage of participation and whether as Sole Contractor, Sub-Contractor or Member in a Joint Venture / Consortium.
4] Indicate the FOREX used if Contract Value is expressed in a currency other than the Philippine Peso. Attached the computation for the escalated contract value.
5] As appearing in the Notice of Award.
6] As appearing in the Notice to proceed and Certificate of Completion.

A. The bidder must have an experience of having completed a SLCC that is similar to the contract to be bid equivalent to at least fifty percent (50%) of the ABC, adjusted if necessary, by the Bidder to current prices using the PSA consumer price indices. A contract is considered to be "similar" to the contract to be bid if it has the same Major Categories of Work as stated in the Bid Data Sheet (BDS).

B. This Statement shall be supported by:
   a. Notice of Award, Notice to Proceed and Contract.
   b. Project Owner's Certificate of Final Acceptance issued by the owner other than the Contractor or Constructors Performance Evaluation System (CPES) Final Rating, which must be at least Satisfactory. The said Certificate of Acceptance shall contain the following: 1) Name of project owner that issued the certificate, 2) Name of Contractor/ Constructor, 3) Name of Contract, and 4) Contract Duration.
   c. Recapitulation or Final Bill of Quantities.

Name of Firm	Name of Bidder/Authorized Representative (Signatory's Legal Capacity)	Date

Revised: September 2026

STATEMENT OF THE BIDDER'S EXPERIENCE ON MAJOR CATEGORIES OF WORK OF THE SLCC INCLUDING OTHER COMPLETED CONTRACTS SIMILAR TO THE CONTRACT TO BE BID

Work Description 1]	Unit of Measure 1]	Quantity 1]	SLCC similar to the contract to be bid 2]	Other completed contracts similar to the contract to be bid 2]			Unit of Measure 2]	Quantity 2]
			Name of the contract	Name of the contract	Name of the contract	Name of the contract		
1. Pile Driving Works (Offshore)	l.m.	2,895						
2. Reinforced Concrete Works	cu.m.	1,302						
3. Rockworks (50 - 1000 kg/pc.)	cu.m.	13,149						
4. Placing of Fill Materials	cu.m.	10,704						
5. Construction of Concrete Pavement	sq.m.	1,810						

NOTE:
1] As appearing in the Recapitulation and/ or Final Bill of Quantities.
This statement shall be supported by:

a. Notice of Award, Notice to Proceed and Contract.
b. Project Owner's Certificate of Final Acceptance issued by the project owner other than the Contractor or Constructors Performance Evaluation System (CPES) Final Rating, of at least satisfactory. The said Certificate of Acceptance shall contain the following: 1) Name of project owner that issued the certificate, 2) Name of Contractor/Constructor, 3) Name of Contract, and 4) Contract Duration.
c. Recapitulation and/ or Final Bill of Quantities.

Name of Firm	Name of Bidder/Authorized Representative Signatory's Legal Capacity	Date

Revised: September 2026

FINANCIAL DATA

A. The prospective bidder's audited Financial Statements, showing, among others, the prospective bidder's total and current assets and liabilities, stamped "RECEIVED" by the Bureau of Internal Revenue (BIR), or its duly accredited and authorized institutions, for the preceding calendar year which should not be earlier than two (2) years from the date of bid submission.

	Year
1. Total Assets	
2. Current Assets	
3. Total Liabilities	
4. Current Liabilities	
5. Net worth (1-3)	
6. Net Working Capital (2-4)	

B. The computation of the bidders Net Financial Contracting Capacity (NFCC) must be at least equal to the ABC to be bid, as follows:

NFCC = [(Current assets minus current liabilities) (15)] minus the value of all outstanding or uncompleted portions of the projects under ongoing contracts, including awarded contracts yet to be started, coinciding with the procurement project to be bid.

NFCC = _____

Attached herewith are certified true copies of the audited financial statements stamped received by the BIR or BIR authorized collecting agent for the latest/immediately preceding calendar year.

_____
Name of Firm/Applicant

_____
Authorized Signing Official

Date:_____

NOTES:

If Partnership or Joint Venture, each Partner or Member Firm of Joint venture shall submit separate financial statements.

STATEMENT OF THE BIDDER'S KEY PERSONNEL PLEDGED FOR THE CONTRACT TO BE BID

I hereby declare that the following key personnel are qualified and available for the duration of the contract to be bid:

Position of Key Personnel 1]	Name	No. of Key Personnel	Similar Experience in the Position (Years) 2]	Total Experience in the Position (Years)	Attachment(s)	Annex(es)
Project Manager					PRC License (CE Preferred) Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Project Engineer					PRC License (CE Preferred) Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Materials Engineer II					PRC License (CE Preferred) Submit Valid and Renewed DPWH Certificate of Accreditation Submit Accreditation Identification Card as Materials Engineer Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Construction Safety and Health Officer					Certificate on Construction Occupational Safety and Health Training course issued by DOLE Accredited Trainings Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Foreman					Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Other Position(s)					Complete Qualification and Experience Data Certificate of Commitment	Annex "_"

NOTE: 1] As stated in the Bid Data Sheet
2] The number of years of experience of the key personnel shall be as indicated in the qualification and experience data or curriculum vitae.

Minimum qualification requirements: The key personnel must have a work experience that is similar in nature and complexity to the contract to be bid.

Project Manager - Five (5) years
Project Engineer - Three (3) years
Foreman - Five (5) years
Construction Safety and Health Officer – One (1) year
Materials Engineer – One (1) year
Materials Engineer I – for projects costing up to 100M
Materials Engineer II – for projects costing more than 100M

Name of Firm

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Date

Revised: September 2026

STATEMENT OF THE BIDDER'S EQUIPMENT PLEDGED FOR THE CONTRACT TO BE BID

I hereby declare that the following equipment are in good operating condition and available for the duration of the contract to be bid:

DESCRIPTION (Type, Model, Make)	No. of Unit(s)	Capacity/ Output 1]	Owned, Leased, and/or under purchased agreement 2]	Proof of Ownership/ Leased/ Under Purchase Agreement (Mark as Annex "A.....Z") 3]	OTHER INFORMATION (As Applicable)				
					Manufacturer	Engine Serial No.	Chassis No./ Name of Vessel	Location	Status

NOTE:

1] The unit of capacity of the pledged equipment shall be as indicated in the Proof of Ownership, i.e. GW (for crane barge), DWT (for deck barge and hopper barge), Ton (for crane, road roller and drop hammer), kg.-m/blow (for diesel hammer), Ton. (for dump truck), hp (for tugboat, road grader, bulldozer and concrete vibrator), cfm (for compressor), gal (for water truck with pump), amp (for welding machine), bagger (for concrete mixer). If the capacity of the pledged equipment is not indicated in the Proof of Ownership/Lease Contract/Purchased Agreement, submit other proof of capacity such as specifications, brochures or other verifiable printouts indicating the model name, model number and other details of the equipment.

2] Indicate if the pledged equipment are owned, leased or under purchase agreement.

3] If the pledged equipment is owned, it should be in the name of the bidder. Submit proof of ownership, i.e. deed of sale, sales invoice, official receipt; For owned Water Truck, Dump Truck, Cargo Truck and Transit Mixer submit LTO Certificate of Registration and valid Official Receipt; For owned barge/tugboat, submit Marina Certificate of Ownership and valid Cargo Ship Safety Certificate.

If the pledged equipment is leased/under purchase agreement, submit the following:

For equipment under lease agreement:

a. certification of availability of equipment from the equipment lessor for the duration of the project
b. duly Notarized copy of lease contract
c. For Water Truck, Dump Truck, Cargo Truck and Transit Mixer submit LTO Certificate of Registration and valid Official Receipt

For equipment under purchase agreement:

a. certification of availability of equipment from the equipment vendor
b. duly Notarized copy of purchase agreement
c. For Water Truck, Dump Truck and Transit Mixer submit LTO Certificate of Registration and valid Official Receipt or copy of conduction sticker, whichever is applicable.

If the pledged barge/tugboat is leased/under purchase agreement, submit certification of availability of barge/tugboat from the equipment lessor/vendor for the duration of the project, and duly Notarized copy of lease contract/purchased agreement together with a copy of the Marina Certificate of Ownership and valid Cargo Ship Safety Certificate.

The Minimum Major Equipment Requirements are listed in Section 8, Annex 3.

Name of Firm	Name of Bidder/Authorized Representative (Signatory's Legal Capacity)	Date

Revised: April 2025

CONSTRUCTION METHODOLOGY

Name of Project : _____

Project Description : _____

Location : _____

MINIMUM SCOPE OF CONSTRUCTION METHODOLOGY

A. REMOVAL, DISPOSAL AND EXCAVATION WORKS

1. Excavation of existing seabed and unsuitable materials.
2. Chipping of existing R.C. Curb and smoothen with mortar.
3. Removal of existing mooring bollards, rubber dock fenders, concrete pavement & security fence.
4. Excavation and backfilling of existing fill materials.

B. CONSTRUCTION OF PORT OPERATIONAL AREA

1. Supply and delivery of 1,000mm dia. Steel Pipe Piles including o-pile connectors & protective coating.
2. Supply and installation of reinforcing band tip for the 1,000mm dia. SPP.
3. Handling, pitching, driving, and splicing of 1,000mm dia. Steel Pipe piles.
4. Supply and installation of steel waling and splice plate.
5. Extraction of clogged materials inside the 1,000mm dia. SPP.
6. Supply and installation of reinforcing cage, placing of sand filler and concrete filler.
7. Handling, pitching, driving, splicing, and chipping of PSC anchor piles.
8. Supply and placing of reinforced concrete for retaining wall, wino wall, curb, ditch, mooring block, anchor pile wall, anchor block, stair landing, and box culvert.
9. Supply and placing of gravel bedding, core rocks, and armour rock
10. Supply and installation of Geotextile fabric and tie-rods.
11. Supply and placing of sand and gravel fill, aggregate sub-base course and aggregate base course.
12. Construction of reinforced and non-reinforced concrete pavement.
13. Construction of catch drain manhole, pedestal, ductbank, and handhole.
14. Supply, fabrication and installation of roro ramp protection.
15. Supply, delivery and installation of rubber dock fenders and mooring bollards.
16. Supply, delivery and installation of port lighting system including accessories.
17. Construction of lateral drainage including trench grate, built-up frames and other accessories.

NOTES:

The narrative construction method will guide and familiarize the contractor and the PPA on how the project shall be carried out in accordance with the highest standard of workmanship.

The construction method shall be consistent with the Bar Chart / S-Curve Schedule, Equipment Schedule and Manpower Schedule.

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Revised: September 2021

MANPOWER SCHEDULE

Name of Project : _____

Project Description : _____

Location : _____

MANPOWER (Minimum)	CONTRACT DURATION (_____ Calendar Days)																							
	MONTHLY																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Project Manager																								
Project Engineer																								
Materials Engineer II																								
Construction Safety and Health Officer																								
Foreman																								
Specify other applicable positions, ie.:																								
- Carpenter																								
- Steelman																								
- Mason																								
- Electrician																								
- Rigger																								
- Others																								

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Revised: September 2021

EQUIPMENT UTILIZATION SCHEDULE

Name of Project : _____

Project Description : _____

Location : _____

EQUIPMENT (Minimum)	No. of Units	CONTRACT DURATION (____ Calendar Days)																							
		MONTHLY																							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Revised: September 2021

CASHFLOW BY QUARTER AND PAYMENT SCHEDULE

Name of Project: : _____

Project Description : _____

Location : _____

Project Duration (days or months)	Payment Schedule (Monthly, in Pesos)	Cash flow (Quarterly, in Pesos)
TOTAL		

NOTES

- The cash flow by quarter and payment schedule should be consistent with the Bar Chart and S-curb.
- Payment schedule shall not be more than once a month.

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Revised: September 2021

H.O. - BIDS AND AWARDS COMMITTEE - EP

CHECKLIST OF BIDDING DOCUMENTS

PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II),

PORT OF PLARIDEL, SIAIN, QUEZON

ABC - Php 670,250,636.73

	REQUIREMENTS
I.	**TECHNICAL COMPONENT ENVELOPE (1 orig. and 6 copies)**
	CLASS "A" DOCUMENTS
	LEGAL DOCUMENTS
	(a) Valid PhilGEPS Registration Certificate
	(Platinum Membership) (all pages)
	TECHNICAL DOCUMENTS
	(b) Statement of the prospective bidder of all its ongoing government and
	private contracts, including contracts awarded but not yet started, if any,
	whether similar or not similar in nature and complexity to the contract to
	be bid; and
	(c) Statement of the Bidder's Single Largest Completed Contract (SLCC)
	similar to the contract to be bid, except under conditions provided under the
	rules;
	a. Experience Record on Similarly Completed Projects
	1. Pile Driving Works (Offshore) (2,895 l.m.)
	2. Reinforced Concrete Works (1,302 cu.m.)
	3. Rockworks (50-1000 kg/pc. (13,149 cu.m.)
	4. Placing of fill materials (10,704 cu.m.)
	5. Construction Concrete Pavement (1,810 sq.m.)
	(d) Special PCAB License in case of Joint Ventures;
	and registration for the type and cost of the contract to be bid; and
	(e) Original copy of Bid Security. If in the form of a Surety Bond, submit also a
	certification issued by the Insurance Commission;
	or
	Original copy of Notarized Bid Securing Declaration; and
	(f) Project Requirements, which shall include the following:
	a. Organizational chart for the contract to be bid;
	b. List of contractor's key personnel to be assigned to the contract to be
	bid, with their complete qualification and experience data:
	Project Manager
	Project Engineer
	Materials Engineer II
	Construction Safety and Health Officer
	Foreman
	c. List of contractor's major equipment units, which are owned, leased, and/
	or under purchase agreements, supported by proof of ownership or
	certification of availability of equipment from the equipment lessor/vendor
	for the duration of the project, as the case may be:
	1 unit Air compressor (250 cfm, min), owned
	1 unit Backhoe (0.50 cu.m., 94.30hp, min), owned/leased
	2 units Centrifugal trash pumps, owned/leased
	1 unit Clamshell, owned
	1 unit Concrete cutter, owned
	2 units Concrete Mixer (1 bagger, minimum), owned
	1 unit Concrete bucket, owned
	1 unit Concrete screeder, owned
	2 units Concrete Vibrator (3.5 hp, minimum), owned
	1 unit Crane Barge (319 GW, min.) with 60T crane, owned/leased
	1 unit Crawler Crane (30T, min), owned/leased
	1 unit Crawler Crane (20T, min), owned/leased
	1 unit Pile Hammer (Diesel, 10,500 - 16,000 kg.m., or hydraulic equivalent), owned
	1 unit Pile Hammer (Diesel, 6,500 - 10,500 kg.m., or hydraulic equivalent), owned
	1 unit Drop Hammer (2T, min.), owned
	1 unit Dump truck (7T net capacity., min.), owned/leased
	4 units Bar Bender (electric, 25mm dia., minimum), owned
	4 units Bar Cutter (electric, 25mm dia., minimum), owned
	1 unit Jackhammer, owned
	2 units Oxy/Acetylene Cutting Outfit, owned
	1 unit Payloader (110 hp, min.), owned/leased
	1 unit Plate compactor (5 hp, min.), owned
	1 unit Road Grader (125 hp, min.), owned/leased
	1 unit Road Roller (10T, vibratory, min.), owned/leased
	2 units Transit Mixer (6.50 cu.m./hr cap., min.), owned/leased
	1 unit Tugboat (500hp, min.), owned/leased
	1 unit Water truck with pump (1,000 gal., minimum), owned
	2 units Welding Machine (400 amp., min.), owned
	1 unit Cargo Truck (2T net cap., min.), owned

H.O. - BIDS AND AWARDS COMMITTEE - EP

CHECKLIST OF BIDDING DOCUMENTS

PLARIDEL PORT DEVELOPMENT/IMPROVEMENT PROJECT (PHASE II),

PORT OF PLARIDEL, SIAIN, QUEZON

ABC - Php 670,260,636.73

	REQUIREMENTS
	(g) Original duly signed Omnibus Sworn Statement (OSS); and
	if applicable, Original Notarized Secretary's Certificate in case of a
	corporation, partnership, or cooperative; or Orginal Special Power of Attorney
	of all members of the joint venture giving full power and authority to its
	officer to sign the OSS and do acts to represent the Bidder.
	FINANCIAL DOCUMENTS
	(h)The prospective bidder's computation of Net Financial Contracting Capacity
	(NFCC).
	CLASS "B" DOCUMENTS
	(i) If applicable, duly signed joint venture agreement (JVA) in accordance which
	R.A. No.4566 and its IRR in case the joint venture is already in existence;
	or
	duly notarized statement from all the potential joint venture partners
	stating that they will enter into and abide by the provisions of the JVA in the
	instance that the bid is successful.
ii	**FINANCIAL COMPONENT ENVELOPE**
	(j) Original of duly signed and accomplished Financial Bid Form; and
	Other documentary requirements under RA No. 12009
	(k) Original of duly signed Bid Prices in the Bill of Quantities; and
	(l) Duly accomplished Detailed Estimates Form, including a summary sheet
	indicating the unit prices of construction materials, labor rate, and
	equipment rentals used in coming up with the bid; and
	(m) Cash Flow by Quarter.