2. Alternative Materials

   Use of any material not specified in this Specification may be allowed provided such alternate has been approved by the Engineer and provided further that a test, if required, shall be done by an approved agency in accordance with generally accepted standards.

3. Soil, Waste, Drain, Vent Pipes and Fittings
   Soil, waste and vent pipes shall be unplasticized Polyvinyl Chloride (uPVC) pipes. Diameter shall be as indicated on the Drawings. It shall conform to ASTM D 1784 or ASTM D 2729.

   Drainage pipes shall be reinforced concrete pipes (RCP), diameter shall be as indicated on the Drawings.

4. Jointing Materials

   The joint material for uPVC pipes shall be PVC solvent cement as recommended by the approved pipe manufacturer.

5. Water Supply Pipes

   Water supply pipes shall be polypropylene random-80 (PPR-80) pipes PN 20 conforming to DIN Standards DIN 1988/DIN 8078, German made. Jointing shall be fusion welded.

6. Cleanout, Plugs and Tee

   Cleanouts shall be of the same material as the pipe to be fitted. Cleanouts installed in connection with uPVC hubs and spigot pipes shall consist of a long sweep quarter bend of % as shown on the drawings.

7. Pipe Sleeves

   Pipe sleeves shall be installed and properly secured in place at all points where pipes passes through masonry or concrete. Pipe sleeves shall be uPVC pipe, Schedule 40.

8. Downspout

   All downspout shall be unplasticized polyvinyl chloride (uPVC) pipe class DWY conforming to ASTM D2729 or ASTM D1784 for sanitary pipes, Series 1000.

9. Splash Block

   Provide splash blocks at the outlet of downspout emptying at grade which shall be made of pre-cast concrete, with smooth finished counter sunk dishes sloped to drain away from the building. Dimensions as shown on the Drawings.

10. Roof Strainers

    The Contractor shall provide fittings and install 100mm G.I. mesh wire strainers where shown or indicated on the drawings and/or where the Engineer directs. Each strainer shall fit the size of the corresponding downspout which is to be installed.

11. Shower, Floor and Urinal Drain

    Shower and floor drains shall be made of stainless steel non-tilting grate, perforated or slotted. Urinal drains shall be cast iron dome type drain.

12. Pipe Hangers, Inserts and Support

a. Pipe hangers shall be wrought iron. malleable iron pipe hangers spaced not over 1.5meters apart for uPVC pipes and 3.0meters apart for iron pipes. Chain straps, perforated bars or wire hangers will not be permitted.

Hangers shall have short turnbuckles or other approved means of adjustment. Turnbuckles may be omitted on hangers where space does not permit their use. Trapeze hangers may be used in lieu of separate hangers for pipes running parallel to each other and dose together.

b. Inserts shall be of cast iron or cast steel and shall be of a type to receive a machine bolt head or nut after installation.

c. Wrought iron clamps or collars shall be used to support vertical runs of pipes.

13. Unions

Union pipe 50mmØ and smaller shall be malleable iron. Union on water piping 63mmØ and larger shall be flanged pattern and shall be of galvanized (zinc coated) cast iron. Gaskets for flange unions shall be of best quality fiber plastic or leather.

14. Valves

Valves shall be cast bronze of brass body. Chrome plated finish for all fixture taps and faucets and natural finish for all others, like hose bibbs, gate valves and which are not tapped directly to a plumbing fixture. Concrete valve boxes shall be installed where required and will be of sufficient size for operating the valve.

15. Fixtures

a. All water closets for toilets as shown on the drawings shall be TANK TYPE, white with complete fittings and mounting accessories.

b. Lavatories

b.1. Lavatory (Wall Hung)

Shall be vitreous china, wall hung lavatory with rear overflow holes, fitting ledge suitable for single faucet holes on centers complete with faucet, standard fittings, trap and lavatory brackets and other accessories.

b.2. Lavatory (Countertop Lavatory)

Shall be vitreous china, oval or round shaped countertop lavatory with front overflow hole, complete with faucet, supply valve and fittings with P-trap. Fitting ledge suitable for single hole on center.

c. Urinals

c.1. Urinals for all comfort buildings shall be built-in urinal trough as shown on the drawings.

c.2. Urinals shall be vitreous china. wall-hung washout urinal. flushing rim, integral trap, 19mm top and shall be provided with water saving flush system.

d. Service Sinks

Service sinks where indicated or shown on the Drawings shall be stainless steel, with single bowl and with complete U.S. or Japan imported fittings.

e. Slop Sinks

Slop sink shall be 24"x20" acid resisting enamel on Cast-Iron with concealed hanger and faucet.

Hose bibb shall be of brass finish.

f. Soap Holder

Soap holder and toilet paper holder shall be vitreous china, wall mounted. All toilet/bathrooms will be provided with soap holder, toilet paper holder and chrome plated towel racks.

g. Faucet for lavatory

The faucet for lavatory shall be in chrome-finish.

h. Bath and shower fitting

Bath and shower fitting shall be chrome-finish.

i. Towel Rail

Towel rail shall be tubular stainless steel, 2.7mmø, and 0.54m tong or as specified in the drawings.

j. Curtain Rod

Curtain rod shall be tubular stainless steel, 19mmØ or as specified in the drawings.

k. Grab Bar

Grab bar shall be tubular stainless steel, 25mmØ or as specified in the drawing.

l. Bidet Spray Combination

Installed in every cubicle near on the water closet, colored white or its equivalent.

16. Concrete, Reinforcing Steel, Pipe and Steel Plate

Materials for wash pits, catch basins and manholes shall conform to the requirements as follows:

a. Concrete materials shall conform with the requirements in "Concrete Works" and shall be Class C concrete with a 28-day minimum compressive strength of 21 MPa (3,000 psi).

b. Reinforcing steel shall be as shown on the drawings and shall conform with the requirements of reinforcing steel bars in "Concrete Works."

c. Pipes shall be as shown on the drawings and shall comply with the relevant item of the

particular pipe.

d. Steel plates shall be as shown on the Drawings and shall comply with Section "Steel and Metal Works".

17. Non-reinforced Concrete Pipe

Non-reinforced concrete pipe shall be as shown on the Drawings and shall conform with the requirements of non-reinforced concrete pipes AIC latest edition. Concrete shall be with a 28-day minimum compressive strength of 20.7 MPa.

18. Valve for Drinking Fountain

Valve where drinking fountain will be connected shall be polished brass pipe and shall have red enameled handle.

EXECUTION

All installation works shall be in conformity with the National Plumbing Code of the Philippines (NPCP).

EXCAVATION, TRENCHES AND BACKFILLING

1. Trenches for all underground pipelines shall be excavated to the required depth. The bottom of trenches shall be tamped hard and graded to secure the required fill. Bell holes shall be excavated so that pipes will rest on solid ground for their entire length.

   Rocks where encountered, shall be excavated to a depth of 150mm below the bottom of the pipe and before the pipe is laid, the space between the bottom of the pipe and the rock shall be filled with sand. Sewer and water pipes shall be laid in separate trenches.

2. After pipelines have been tested, inspected and approved by the Engineer and prior to backfilling, all forms shall be removed, and the excavation shall be cleaned of all trash and debris.

   Materials for backfilling shall consist of acceptable excavated soil, borrow of sand, gravel or other materials approved by the Engineer and shall be free from trash, lumber or other debris. Backfilling shall be placed in horizontal layers not exceeding 150 mm in thickness and properly moistened to approximate optimum requirements. Each layer shall be compacted by hand or machine tamper or by other suitable equipment to a density that will prevent excessive settlement or shrinkage.

   Backfilling shall be brought to a suitable elevation above grade to provide for anticipated settlement and shrinkage thereof.

   Water pipes shall have a sand cushion 150mm below and above the pipes.

INSTALLATION OF SOIL, WASTE DRAINS OR VENT PIPES

1. Horizontal Drainage Pipe and Vent Piping

   Horizontal waste pipes 75mmØ and smaller shall have a minimum grade of 6.5mm per 0.30m and for 100mmØ and larger, 3.2mm per 0.30m. All main vertical soil and waste stacks shall be extended full size above the roof line as vents, except where otherwise specifically shown.

   Where practicable, two (2) or more vent pipes shall be connected together and extended as

one pipe through the roof. Vent pipes in roof spaces shall be run as close as possible to the underside of roof with horizontal piping pitched to stacks using fittings as required without forming traps in pipes.

Vertical pipe vents may be connected to a vent line carrying other fixtures. The connection shall be at least 1.20m above the floor on which the fixtures are located to prevent the use of vent lines as waste. Horizontal waste lines receiving the discharge from two (2) or more fixtures shall be provided with vents, unless separate venting of fixtures is noted.

2. Fittings

All changes in pipe sizes on soil waste lines shall be made with reducing fittings or recessed reducers. All changes in direction shall be made by the appropriate use of forty five (45) degree wyes. Long sweep quarter bends or elbows may be used in soil and waste lines where the change in direction of flow is from the horizontal to the vertical and on the discharge from water closets.

Where it becomes necessary to use short radius fittings in any location, the approval of the Engineer shall be obtained before they are installed.

3. Joints

a. PVC Soil Pipe

All joints in uPVC soils, waste and vent pipe shall be accomplished by the use of PVC solvent cement.

b. All joints for uPVC shall be accomplished by applying the manufacturer's recommended solvent before connection to the pipe.

4. Cleanouts

Cleanouts at the bottom of each soil stack, waste stack and where else indicated shall be the same size at the pipe.

Cleanouts on floors shall be by uPVC plug adapter fit into the hub and fitted with uPVC screw plugged flush with the floor.

Cleanout shall be provided at every change in direction greater than 45 degrees.

5. Flashings

All pipes passing through the roof shall be provided with lead flashings. All flashings shall be built to 40 lbs. bituminous felts and shall extend up to the pipe and down-over to top of pipe at least 150mm and along the roof not less than 300mm and shall lap over flashing to make a weatherproof joint.

6. Traps

Each fixture and piece of equipment requiring connections to the drainage system, except fixtures with continuous waste shall be equipped with a trap. Traps shall be specified to be supplied with the fixtures. Each trap shall be placed as near to the fixtures as possible. Traps installed on threaded pipes shall be recessed drainage pattern.

7. Pipe Sleeves, Hangers and Supports

   Pipe sleeves shall be installed and properly secured in place at all points where pipes pass through masonry or concrete except unframed floors on earth.

   Pipes shall not be permitted to pass through footings or beams unless noted on the drawings.

   Pipe sleeves in floors shall extend not less than 25mm and not more than 50mm above the finished floor. After installation of the pipe, the space around the pipe shall be packed with plastic material and made watertight. Flashing shields for sleeves passing through waterproofing membrane shall be thoroughly mopped into the membrane. The space between the pipe and sleeves shall be made watertight by inserting approved sealing and caulking materials.

INSTALLATION OF WATER PIPES, FITTINGS AND CONNECTIONS

1. Gate Valves and Outlets

   Gate valves shall be installed close to the point of connection to the existing service line outside the building. The piping shall be extended to all fixture outlets and equipment from the gate valves. Outlets where indicated shall be capped or plugged and left ready for future connections.

2. Mains, Branches and Runouts

   All runs of piping shall be installed as shown on the drawings. The piping shall be cut accurately to measurements, and installed at the building site by the Contractor and shall be worked into place without springing or forcing. Care shall be taken not to weaken the structural portions of the buildings.

   All pipes above ground shall be run parallel with the lines of the building unless otherwise shown on the drawings. Branch pipes from service lines may be taken off on top of mains, bottom of mains or side of mains, using such cross over fittings as may be required by structural or installation conditions.

   All service pipes, valves and fittings shall be kept at sufficient distance from the other work to permit finished covering not less than 6.5mm from such other work and not less than 13mm between finished covering on different services. No water piping shall be buried in floors unless specifically indicated on the drawings or approved. Changes in pipe sizes shall be made with reducing fittings.

   The use of long screws and bushings is prohibited.

3. Joints

   Joints and connections in the plumbing system shall be gas-tight and watertight for the pressures required by test.

   After cutting and before threading all pipes shall be reamed and shall have burrs removed. All screwed joints shall be applied with an approved graphite compound or TEFLON tape to facilitate connections. Threads shall be full cut and not more than three threads on the pipe shall remain exposed.

   Caulking of threaded joints or top to prevent teaks shall not be permitted.

Unions shall be provided where required for disconnection. Threaded swing botts shall be used for branch connections to risers and mains.

4. Unions

Where required unions shall not be concealed in walls, ceilings or partitions.

5. Tests

The following tests shall be conducted by the Contractor at his expense under the supervision of the Engineer.

a. Tests for Drainage and Venting System

The entire drainage and venting system shall have necessary openings plugged to permit the entire system to be filled with water to the level of the highest vent stack above the roof. The system shall hold the water for 30 minutes with a drop not greater than 100mm.

b. Sterilization

The entire water supply piping system shall be sterilized with a solution containing not less than fifty (50) parts per million of available chlorine, either liquid chlorine or a solution of sodium hypochlorite. The sterilizing solution shall remain in the system for a period of not less than 8 hours during which time all valves and faucets shall be opened and closed several times. After sterilization, the solution shall be flushed from the system with clean water until the residual chloride content is not more than 0.2 parts per million.

c. Pressure Test for Water Lines

1. After the pipe have been installed, the joints completed and with joints exposed for examination, all newly installed pipe or any valve section thereof, shall be subjected to hydrostatic pressure one and one half (1%) the designed working pressure of the system or as specified by the Engineer.

2. The duration of each pressure test shall be at least 20 minutes unless otherwise specified by the Engineer.

3. 3.Each section of pipeline shall be slowly filled with water and the specified test pressure, measured at the point of lowest elevation, shall be applied by means of a pump connected to the pipe in a manner satisfactory to the Engineer. During the filling of the pipe and before applying the test pressure, all air shall be expelled from the pipeline. To accomplish this, tap shall be made if necessary, at the highest point of the pipe under test and after completion of the test, the taps shall be tightly plugged unless otherwise specified. During the test, all exposed pipes, fittings, valves, joint and couplings will be carefully examined. If found to be cracked or defective, they shall be removed and replaced by the Contractor with sound materials at his expense. The test shall then be repeated until satisfactory results are obtained.

d. Leakage Test for Water Lines

1. Leakage test shall be conducted after satisfactory completion of the pressure test and shall consist of an examination of all exposed joints for leakage as well as an overall leakage test of the completed pipeline.

2. The pressure to be maintained during the test shall be the designed working pressure of the system.

3. Leakage test shall be made only after a minimum of 24 hours after the pipe to be tested has been filled with water.

4. The duration of each leakage test shall be two hours unless otherwise specified by the Engineer.

5. Each section of pipeline shall be slowly filled with water and the specified test pressure, measured at the point of lowest elevation shall be applied by means of a positive displacement type pump and reservoir connected to the pipe in a manner satisfactory to the Engineer.

6. Before starting the leakage test, all air shall be expelled from the pipe. Ail exposed pipes, fittings, valves and joints shall be examined for during the test.

7. Allowable leakage rate per 100 joints per inch of Pipe Diameter at Pressure Stipulated.

PRESSURE		LEAKAGE RATE	
psi	kg /cm^2	liters/hr.	liters/2 hrs.
50	3.50	1.45	2.90
75	5.30	1.75	3.50
100	7.00	2.05	4.10
125	8.80	2.30	4.60
150	10.50	2.50	5.00
200	14.00	2.90	5.80

e. Defective Work

1. If the inspection or test shows any defect, such defective work or material shall be replaced and the test shall be repeated satisfactory until to the Engineer.

2. All repairs to piping shall be made with new materials at the expense of the Contractor.

3. 3.No caulking of screwed joints or holes will be accepted.

ASSEMBLY, INSTALLATION AND CONNECTION OF FIXTURES

Fixtures shall be supported and fastened in a satisfactory manner. Where secured to concrete or masonry work walls, fixtures and equipment shall be fastened with brass bolts or machine screws in lead-sleeve type anchorage units or with brass expansion bolts. Expansion bolts shall enter 7.5 cm into solid concrete or masonry works and shall be fitted with loose tubing or sleeves of proper length to bring expansion sleeves into the solid concrete masonry walls.

Where wood screws are used, screws shall go into solid pieces set between studs. 'Mere through-bolts are used, bolts shall be provided with plates or washers at back set, so that they will be concealed by plaster. Bolts and nuts shall be hexagonal and exposed nuts, cap nuts, and screw heads shall be provided with chromium plated brass washers.

PROTECTION OF FIXTURES

Pipe openings shall be closed with caps or plugs during installation. Fixtures shall be tightly covered and protected against dirt, water and chemical injury. At the completion of all works, all fixtures shall be

thoroughly cleaned and delivered in a condition satisfactory to the Engineer.

FIXTURES AND FASTENING

All fixtures shall be supported and fastened in a satisfactory manner as follows:

1. Where secured to concrete or concrete hollow block walls, they shall be fastened with one quarter inch brass bolts with twenty threads to the inch and of sufficient length to extend at least 7.5 cm into solid concrete or hollow block work, fitted with loose tubing or sleeve insert and shall be securely anchored and installed flush with the finished wall and shall be completely concealed when the fixtures are installed.

2. Where are used, they shall be provided with plates or washers back set so that heads, nuts and washers will be concealed by plaster. Bolts and nuts shall be hexagonal. Exposed bolts, nuts, capnuts and Screw heads shall be provided with chromium washers.

GUARANTEE

Upon completion and before final acceptance of the equipment installation, the Contractor shall furnish the Engineer a written guarantee stating that all equipment installed under this Section free from defects. The guarantee shall be for a period of one (1) year from the date of final acceptance of the work. Any part of the equipment that becomes defective during the term of the guarantee shall be replaced, renewed and/or made good by the Contractor, at his own expense and in a manner satisfactory to the Engineer.

Guarantees made by the approved manufacturers or suppliers beyond one year, shall be transferred to PPA without any expense on his part.

CLEANING UP

Upon completion of the work, all parts of the installation shall be thoroughly cleaned of grease, metal cuttings and sludge which may have accumulated during the testing operation.

PLUMBING, FIXTURES AND TOILET ACCESSORIES INSTALLATION

All installation works shall be as shown on the drawings and shall conform to the applicable standards set forth by the Philippine National Plumbing Code. All fixtures shall be fastened and/or supported in accordance with the given requirements.

ITEM 09 : ELECTRICAL WORKS

SCOPE OF WORK

The work to be done shall consist of furnishing, delivering and installing electrical materials/fixtures completed in accordance with all the details of the electrical works as shown on the drawings including materials, labor, tools and equipment and all incidental works as found necessary.

Refer to electrical plans/drawings for location and extent of work involved.

GENERAL REQUIREMENTS

a) All works shall be done in accordance with the requirements of the publications and agencies having jurisdiction, as well as the requirements of the approved standards.

1.	National Fire Protection Association	-	(NFPA)
2.	National Electrical Manufacturer Association	-	(NEMA)
3.	Underwriter Laboratories, Inc.	-	(UL)
4.	Philippine Electrical Code Philippine National Standard	- -	(PEC) (PNS)
5.	Federation Specification: Circuit Breaker, Molded Case, Branch Circuit and Service		
6.	American National Standard Institute	-	(ANSI)
7.	American Society for Testing and Materials	-	(ASTM)
8.	Illuminating Engineering Society	-	(IES)
9.	Light Emitting Diode	-	(LED)

b) The electrical power of the Port lighting system will be connected to the Main Disconnect Panel (MDP) located on the concrete pedestal post. While the supply voltage should be 230 volts, single phase (1Ø), and 60 hertz.

c) The Contractor shall employ a licensed Registered Electrical Engineer or Master electrician to perform or to supervise and to conduct the continuous inspection of all electrical work.

d) The Contractor shall first obtain approval from the Authority before procurement, fabrication or delivery of electrical materials to the site. Partial submittals will not be acceptable and will be returned without review. Submittals shall include the Manufacturer's Name, Trade Name, Place of Manufacture, Catalog Model or Number, Nameplate Data, Size, Layout Dimensions, Capacity, Project Specification and Paragraph Reference, Technical Society Publication References and other information necessary to establish contract compliance of each item to be furnished.

e) All excavations fill and backfill and concrete works involved herein, shall be carried to the required elevations and shall conform to the provisions of specification under Earthwork and Concrete Construction of this tender document.

f) The materials and equipment to be furnished shall be standard products of reputable manufacturer engaged in the reproduction of such materials and equipment.

g) All permits and electrical fees required for this work shall be obtained at the expense of the Contractor. The Contractor shall furnish the Engineer-in-Charge, the final Certificates of Inspections and approval from the proper government authorities after the completion of work. The Contractor shall prepare all as- built plans and all other paper works as required by the enforcing authorities.

h) The Contractor shall furnish and install electrical materials as shown in the drawings. A licensed Electrical Engineer or Master Electrician is required to implement the installation of the electrical system.

i) Electrical installation shall conform to the requirements of Philippine Electrical Code (PEC) and the other approved standards.

j) The contractor shall install all electrical works with the supervision of the qualified Registered Electrical Engineer (REE) or Master Electrician. All electrical installation applications regardless of capacity and voltage whether new, addition or revision shall be accompanied by electrical plans signed and sealed by a duly licensed Professional Electrical Engineer (PEE).

MATERIAL REQUIREMENTS

All materials shall be brand new and shall be of the approved type meeting all the requirements of the Philippine Electrical Code and bearing the Philippine Standard Agency (PSA) mark.

PRODUCTS

WIRES AND CABLES

The conductor material to be furnished and installed shall be copper wire Heat-Resistant Thermoplastic (THHN/THWN-2). All conductors shall be rated 600 volts insulation and shall be standard for all sizes.

CONDUIT AND FITTINGS

Underground PVC conduit shall be polyvinyl chloride with concrete covered. It shall be manufactured to schedule 40 outside diameter. All fittings and bends shall be solvent bonded using manufacturers recommended product.

LED FLOODLIGHT FIXTURE 500 WATT

Specifications:

Rated	: 500 watt LED or equivalent
Luminous Flux	: 70,000 – 75,000 lm
Driver	: Meanwell Driver
Color Temperature	: 2700K - 6500K / Warm White, Nature White, Daylight
Input Voltage	: AC 90-305V / 50-60 HZ
Light Source	: High Brightness SMD LED
Material	: Aluminum Housing + Acrylic Cover

Beam Angle	: 140 degrees
Lifetime	: > 50,000 hours
IP Rating	: IP 65 outdoor (Water Resistant)

CONCRETE DUCT BANK

The contractor shall construct concrete duct bank as shown in the approved plan.

HIGH MAST TOWER (30.00 meter height)

The High Mast Tower shall be transported by the contractor to the erection sites at his expenses and responsibility and shall be handled with care to avoid bending or damaged to the galvanizing. Materials on which galvanizing has been damage shall be re-dipped unless in the opinion of the Engineer the damage is local and can be repaired by painting with at least two (2) coats of zinc paint. The repair shall be made by and at the expense of the contractor. The number of floodlight fixtures pre required as shown in the plan.

Detail connection of High Mast Tower as shown in the plan. Anchor bolts to be stainless steel or galvanized steel and designed and provided by the high mast tower manufacturer to ensure that the high mast tower and anchor bolts assembly capacity meets all the stresses composed of wind, luminaires weight and live load of maintenance personnel.

PROTECTIVE COATING FOR HIGH MAST TOWER

Hot Dipped Galvanizing Preparation

All mild steel parts exposed to weather shall be hot-dipped galvanized after fabrication as shown in the approved plan or directed by the Engineer in accordance with the requirements if JIS H88641. Prior to galvanizing, the surface shall be cleaned of dirt, weld splatter, grease, slag, oil, paint or other deleterious matters. The steel surfaces shall be chemically descaled and cleaned with abrasive blast or other suitable method as approved by the Engineer.

Coating

The zinc coating shall consist of uniform layer of commercially pure zinc free from abrasions, cracks, blisters, chemical spots or other imperfections, and shall adhere firmly to the surface of the steel. The weight of the zinc coating per square meter of actual surface shall not be less than 550 grams. Any surface damaged subsequent to galvanizing shall be given two coats of approved zinc paint.

Painting of Galvanize Steel Work

Hot-dipped galvanized high mast tower are to be treated at the works with an appropriate zinc chromate two packs etch primer followed by one coat of non-etch zinc chromate primer and one coat of micaceous iron oxide paint before shipment. On site damage to the coating is to be repaired and a final coat of micaceous iron oxide is to be applied after erection, generally in accordance with the specifications for shot blasted steel.

WARRANTY

Manufacturer must submit a warranty for the corrosion resistant cladding material against manufacturing defects for a period of one (1) year from the date of original purchase.

LIGHTNING PROTECTION WITH ACCESSORIES

It consists of air terminals, down conductors, ground connections, grounding electrodes as shown in the plan.

PANEL BOARD / Distribution Panel Board

Panel board shall conform as shown on the approved plans with respect to supply characteristics, rating of main lugs or main circuit breaker, number and ratings and capacities of branch circuit breakers.

Panel board shall consist of a factory completed dead front assembly mounted in an enclosing NEMA-3R cabinet consisting of code gauge galvanized sheet steel box with trim and door.

Main and branch circuit breakers for panel board shall have the rating, capacity and number of poles as shown on the approved plans. Breakers shall be thermal magnetic type solid state-type with interrupting capacity of 10,000 amperes symmetrical minimum. Breaker terminal shall be UL listed as suitable for type of conductor provided. Breaker shall be the bolt-in type (that is, bolted to the current carrying bus). Plug-in circuit breakers are not acceptable

EXECUTION

INSTALLATION

The contractor shall use standard and accepted practice and methods of erecting the high mast tower depending upon their location. The high mast tower shall be erected by the contractor in accordance with the structure list and the erection diagrams prepared by the high mast tower manufacturer.

The high mast tower may be erected by assembling in sections on the ground and hoisting successive sections in place, or they may be build-up in place individual members at the option of the contractor. If erected by assembling in sections, not less than fifty percent (50%) of all bolting in place shall be done on each section before starting another section. All bolts shall be drawn up tight but not to such a degree as to endanger the strength of the bolt. All nuts shall be locked in place. All bolts ends below three (3) meters above ground should be flattened to prevent the nut from being taken out from the bolt. Only wrenches approved by the Engineer shall be used on the work, and the use of any wrench that may deform the nut or cut or flake the galvanizing shall not be permitted.

A reasonable amount of drifting shall be allowed in assembling but reaming for correction of mismatched holes due to shop errors shall be permitted. If any shop error in the steel is discovered, the contractor shall notify the Engineer, who will decide whether the errors may be corrected in the field or the members returned to the manufacturer for correction or replacement. Galvanized damaged during the corrections of shop errors shall be repaired in accordance with the plans/ specifications.

Final inspection of the high mast tower shall be made by the Engineer who shall make and report all loose bolts and other errors in erection, and shall make sure all bolts are in place and are tightened properly and that all nuts are locked properly.

The high mast tower shall be erected so that any portion of the high mast tower shall be in correct position relative to the high mast tower vertical center line, which shall not deviate from any plumb by more than 0.2% of height in either the transverse or longitudinal direction.

Construction of reinforced concrete high mast tower foundation and ductbank shall be in accordance with all the details in the plan.

Excavations / backfilling required before /after installation of high mast tower and concrete pedestal post shall conform to the provisions of Earthwork and Concrete Construction.

Concrete Pedestal Post shall be reinforced concrete with appropriate weatherproof fittings as constructed as shown in the approved plan. Reinforced concrete materials shall conform to the requirements of concrete. Concrete shall be of 210kg/cm^2 compressive strength.

Metering: the local utility company of Port of Cagayan de Oro, Cagayan de Oro, Misamis Oriental, is responsible for the supply and installation of measuring equipment, and its accessories, but it is part of the contractor responsibility and expense to contact them about this.

WORKMANSHIP

The work throughout shall be executed in the best and most thorough manner under the direction of and at the satisfaction of the Registered Electrical Engineer or Master Electrician, who will interpret the intent meaning of the drawings and specification and shall have the power to reject any work and materials which in his judgment, are not in full accordance therewith.

TESTING OPERATIONS

When the electrical installation is completed, the Contractor shall test the installed electrical materials and equipment in the presence of Registered Electrical Engineer or Master Electrician. The system shall be free from any defects, shorts or grounds. The Contractor at no extra cost shall furnish all necessary instruments and personnel required for the testing.

GUARANTEE

Upon completion and before final acceptance of the work, the Contractor shall furnish the Engineer a written guarantee stating that all works executed are free from defects on materials and workmanship. The guarantee shall be for a period of one year from the date of the final acceptance. Any work that becomes defective during the said period shall be corrected / replaced by the Contractor at his own expense in a manner satisfactory to the Authority.

ITEM 10 : FIRE DETECTION AND ALARM SYSTEM

GENERAL

"Electrical General Requirements" applies to this Item with additions and modifications specified herein.

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only. The edition or the revised version of such codes and standards current at the date twenty eight (28) days prior to date of bid submission shall apply. During Contract execution, any changes in such codes and standards shall be applied after approval by the Owner.

1. Factory Mutual Engineering and Research Corporation (FM)
   FM P7825 (2005) Approval Guide Fire Protection

2. National Fire Protection Association (NFPA)
   NFPA 70 (2005) National Electrical Code
   NFPA 72 (2002) National Fire Alarm code
   NFPA 90A (2002) Installation of Air Conditioning and Ventilating Systems
   NFPA 101 (2002) Life safety Code

3. Institute of Integrated Electrical Engineers (IIEE) PEC (2000) Philippine Electrical Code

4. Underwriters Laboratories Inc. (UL)
   UL 268 (1996; Rev thru Oct 2003) Smoke Detectors for Fire Alarm Signalling Systems
   UL 514A (2004) Metallic Outlet Boxes
   UL 514B (2004) Fittings for Conduit and Outlet Boxes
   UL 864 (2003; Rev Thru Oct 2003) Control Units and Accessories for Fire alarm Systems
   UL 464 (2003; Rev Thru Oct 2003) Audible Signal Appliances
   UL 1242 (2000; Rev thru May 2003) Intermediate Metal Conduit
   UL 1971 (2000; Rev thru May 2004) Safety Signaling Devices for the Hearing Impaired
   UL 521 (1999; Rev thru Oct 2002) Heat Detectors for Fire Protective Signaling Systems

DESCRIPTION OF WORK

The work includes providing new interior fire alarm system including material, tools, equipment, installation, and testing necessary for and incidental to the provision of a complete and usable standard system conforming to the applicable requirements of PEC, NFPA 70, NFPA 72, NFPA 90A, and NFPA 101, and this specification. Materials and equipment to be furnished under this contract shall be essentially the current design products of manufacturers regularly engaged in production of such equipment and shall be listed by the Underwriters' Laboratories,Inc. in the UL FPED, or approved by Factory Mutual System and listed in FM P7825.

SUBMITTALS

Submit the following.

1. Shop Drawings
   A. System layout

   B. System wiring diagrams

C. Conductor wire marker schedule

2. Product Data

A. Control panel and modules

B. Batteries

C. Battery charger

D. Manual pull stations

E. Smoke detectors

F. Duct smoke detectors (Optional)

G. Audio/Visual/Alarm horns

H. Graphic annunciator panel

I. Wring

J. Conduit

K. Outlet boxes

L. Fittings for conduit and outlet box

Data which describe more than one type of item shall be clearly marked to indicate which type the Contractor intends to provide.

Submit one original for each item and clear, legible, first generation photocopies for the remainder of the specified copies. Incomplete or illegible photocopies will not be accepted. Partial submittals will not be accepted.

3. Test Reports

4. Preliminary Testing

5. Final Acceptance Testing

Submit for all inspections and tests specified under paragraph entitled "Field Quality Control."

6. Certificates

A. Qualifications of installer

B. Qualifications of system technician

7. Operation and Maintenance Date

A. Fire alarm system

8. Closeout Submittals

A. System as-built drawings

QUALITY ASSURANCE

1. Qualifications of Installer

The Contractor or installer shall have satisfactorily installed fire alarm systems of the same type and design as specified herein. Prior to commencing fire alarm system work, submit data showing that the Contractor or installer has satisfactorily installed three fire atam systems of the same type and design as specified herein within the past three years. For each system installed, submit the following:

A. A detailed summary of the type and design of the system;

B. The contract name or number, completion date of the project and total cost of the system;

C. The name and telephone number of the facility or installation for which the work was performed;

2. Manufacturers Representative

Provide the services of a representative or technician from the manufacturer of the system, experienced in the installation and operation of the type of system being provided, to supervise installation, adjustment, preliminary testing, and final testing of the system and to provide instruction to Owner representative.

3. Qualifications of System Technician

Installation drawings, shop drawings and as-built drawings shall be prepared by, or under the supervision of, a qualified technician. Qualified technician shall be an individual who is experienced with the types of work specified herein. Contractor shall submit data showing the name and certification of the technician at or prior to submittal of drawings.

4. Drawing Requirements

A. System Layout

Submit shop drawings of the system layout showing locations of initiating devices and alarm horns. Show wire color coding, wire counts, and device wiring order.

B. System Wiring Diagrams

Submit complete wiring diagrams of the system showing points of connection and terminals used for all electrical connections in the system. Show all modules and lamps in the control panel.

C. System As-Built Drawings

Upon completion, and before final acceptance of the work, fumish to the Engineer 4 complete sets of as-built drawings, including complete as-built circuit diagrams, of each the system. The as built drawings shall be as the contract drawings and with title block similar to contract drawings.

MAINTENANCE
1. Spare Parts

Fumish the following spare parts:

a. Five (5) complete sets of system keys

b. One (1) of each type of audible and visual alarm device installed

c. Two (2) of each type of fuse required by the system

d. One (1) spare zone modules for modular type control panels in addition to those installed in the panel

e. Two (2) of each type of heat detector installed

f. Tow (2) of each type of smoke detector base and head installed

2. Manuals

Submit operation and maintenance data manuals. The manual shall include: circuit drawings; wiring and control diagrams; installation instructions; maintenance instructions; safety precautions, diagrams, and illustrations; test procedures; performance data; and parts list.

MATERIAL REQUIREMENTS

SYSTEM DESIGN

1. Operation
Provide a complete, electrically supervised, zoned, annunciated, fire alarm system as described herein, and as shown on the drawings. Provide separate circuits from the control panel to each zone of initiating devices as specified herein.

a. Fire Alarm Signal Initiation
b.
Operation shall be such that actuation of any:

1) Manual station

2) Smoke detector

Shall cause ell of the following actions:

a) All building evacuation alarm devices Audio/visual alarm homs to operate continuously;

b) The annunciators to properly register;

All operations shall remain in the alarm mode until the system is manually restored to normal.

b.Monitoring Integrity of Installation Conductors

All system circuits shall be electrically monitored for integrity including the following:

1)Initiating circuits.

2) Evacuation alarm circuits

3) Battery power supply low and no voltage across the standby battery terminals and open battery circuit. Provide Class A initiating device circuits, and Class A notification device circuits as defined by NFPA 72. For Class A circuits, provide separate conduits for outgoing and return (redundant) conductors as required by NFPA 72. A ground fault condition or single break in any other circuit shall cause operation of the system trouble signals. Loss of AC power, abnormal AC voltage, a break in the standby battery power circuit, or low battery voltage shall also cause operation of system trouble signals. The abnormal position of any switch in the control panel shall also cause operation of the system trouble signals. Audible and visual equipment for supervision of the AC power supply shall be energized from the auxiliary DC power supply and vice versa. Trouble signals shall sound continuously until manually silenced or the system has been restored to normal.

c. Walk-Test Mode

Provide system with walk-test mode to allow one person to test alarm and supervisory features of initiating devices. Walk-test mode shall be enabled from the control panel by authorized service personnel. Control panel shall display a unique visual indication when system is in walk-test mode. If testing ceases while in walk-test mode, after a preset delay system shall automatically return to normal standby mode.

d. Alarm Verification Feature

System shall have a smoke detector alarm veification feature. upon activation of any area smoke detector, system shall institute an alarm verification process prior to enabling of the alarm functions as specified herein. Activation of any initiating device other than an area smoke detector shall cause immediate enabling of system into alarm mode. If an alarm input from a smoke detector on the initial zone in alarm is present at the end of an initial delay period not exceeding 20 seconds, all alarm functions as specified herein shall be immediately enabled. If a smoke detector alarm input is not present at the end of the initial delay period, a second-stage confirmation period of one minute shall be initiated. If a smoke detector alarm input is received during the second-stage confirmation period, all alarm functions shall be immediately enabled. During the verification process, activation of any area smoke detector on any zone other than the initial zone in alarm shall also cause system to go into alarm mode immediately. If no smoke detector alarm input occurs within the second-stage confirmation period, system shall reset to normal. Any alarm input received from an area smoke detector after the second-stage confirmation period has elapsed shall cause system to institute a new verification process.

2. Primary power

Primary power source shall be 240 volts AC service, transformed through a two winding isolation type transformer and rectified to 24 volts DC for operation of all initiating device, notification device signaling line and trouble signal. The alarm current draw of the entire fire alarm system shall not exceed 80 percent of the rated output of the system power supply modules. Obtain AC operating power as shown on contract drawings. Provide an independent enclosed circuit breaker with provisions for locking the cover and operating handle in the "POWER ON" position. Paint the enclosure red and identify it by the lettered designation "FIRE ALARM SYSTEM POWER".

3. Auxiliary Power

Provide secondary DC power supply for operation of system in the event of failure of the AC source. Transfer from normal to emergency power or restoration from emergency to normal power shall be fully automatic and shall not cause transmission of a false alarm.

A. Storage Batteries

Provide sealed lead calcium or sealed lead acid or batteries and charger. Dry cell batteries are not acceptable. House batteries in the control panel. Provide batteries of adequate ampere-hour rating to operate the system, including audible trouble signal devices, and under supervisory conditions for 60 hours, at the end of which time batteries shall be capable of operating the entire system in a full alarm condition for not less than 15 minutes. Provide calculations substantiating the battery capacity. Provide reliable separation between cells to prevent between terminals of adjacent cells and between battery terminals and other metal parts.

B. Battery Charger

Provide completely automatic high/low charging rate type capable of recovery of the batteries from full discharge to full charge in 24 hours or less. Provide a trouble light to indicate when batteries are manually placed on a high rate of charge as part of the unit assembly if a high rate switch is provided. House charger in the control panel.

COMPONENT DESIGN

1. Control Panel

Control Panel shall comply with the applicable requirements of UL 864. Provide modular type panel installed in a surface mounted steel cabinet with hinged door and cylinder lock. Mount with panel centerline 1.5 m above finished floor elevation. Switches and other controls shall not be accessible without the use of a key. The control panel shall be a neat, compact assembly containing all parts and equipment required to provide specified operating and supervisory functions of the system.

Each control panel component shall be UL listed or FM approved and approved by the control panel manufacturer for use in the control panel. Panel cabinet shall be finished on the inside and outside with factory-applied enamel finish. Provide main annunciator located on the exterior of the cabinet door or visible through the cabinet door. Provide audible trouble signal. Provide permanent engraved rigid plastic or metal identification plates, or silk screened labels attached to the rear face of the panel viewing window, for all lamps and switches. Provide panel with the following switches:

A. Trouble silencing switch which silences audible trouble signals without extinguishing trouble indicating lamps. For non-self resetting type switch, upon correction of the trouble condition, audible signals will again sound until the switch is returned to its normal position. For silencing switch of the momentary action, self resetting type, the trouble signal circuit shall be automatically restored to normal upon correction of the trouble condition.

B. Evacuation alarm silencing switch which when activated will silence all alarm notification devices without resetting the panel, and cause operation of system trouble signals. Subsequent alarms from additional zones not originally in alarm shall cause activation of the notification devices even with the alarm silencing switch in the "silenced" position.

C. Individual zone disconnect switches which when operated will disable only their respective initiating circuit and cause operation of the system and zone trouble signals.

D. Reset switch which when activated will restore the system to normal standby status after the cause of the alarm has been corrected, and all activated initiating devices reset. Operation of reset switch shall restore activated smoke detectors to normal standby status.

E. Lamp test switch.

F. Drill switch which will enable test of notification devices and restoration to normal.

1. Graphic Annunciator Panel (Optional)

Provide panel located as shown. Mount with panel centreline 1.5 m above finished floor elevation. Panel shall be of the interior type, surface-mounted. Panel shall be provided with the building floor plan, drawn to scale, with alarm lamps mounted to represent the location of each initiating device. Panel graphic shall also show the locations of the control panel, and shall have a "you are here" arrow showing its location. Orient building floor plan on graphic to location of person viewing the graphic, i.e. the direction the viewer is facing shall be toward the top of the graphic display. Provide a North arrow. Lamps shall illuminate upon activation of corresponding device and shall remain illuminated until the system is reset. Panel shall have a lamp test switch.

2. Manual Pull Stations

Provide noncoded single action type with mechanical reset features. Stations shall be surface semiflush mounted and interior type as indicated. For surface mounting provide station manufacturer's approved back box. Back box finish shall match station finish. Equip each station with a terminal strip with contacts of proper number and type to perform functions required. Stations shall be a type not subject to operation by jarring or vibration. Break-glass-front stations are not permitted; however, a pull-lever break-rod type is acceptable provided presence of rod is not required to reset station. Station color shall be red. Station shall provide visible indication of operation. Restoration shall require use of a key. Keys shall be identical throughout the system for all stations and control panel. Mount stations with operating lever not more than 1.2 m above finished floor.

3. Provide smoke detector in accordance with NFPA 101, Life Safety Code. Provide detectors designed for detection of abnormal smoke densities by the photoelectric principle. Detectors shall be 4-wire type. Provide necessary control and power modules required for operation integral with the control panel. Detectors and associated modules shall be compatible with the control panel end shall be suitable for use in a supervised circuit. Malfunction of the electrical circuits to the detector or its control or power units shall result in the operation of the system trouble signals. Each detector shall contain a visible indicator lamp that shall flash when the detector is in the normal standby mode and shall glow continuously when the detector is activated. Each detector shall be the plug-in type with tab-lock or twist-lock, quick disconnect head and separate base in which the detector base contains screw terminals for making all wiring connections. Detector head shall be removable from its base without disconnecting any wires. Removal of detector head from its base shall cause activation of system trouble signals. Each detector shall be screened to prevent the entrance of insects into the detection chambers.

A. 4-Wire Smoke Detectors (Optional)

Detector circuits shall be of the 4-wire type whereby the detector operating power is transmitted over conductors separate from the initiating circuit. Provide a separate, fused, power circuit for each smoke detector initiating circuit (zone). Failure of the power circuit shall be indicated as a trouble condition on the corresponding initiating circuit.

B. Photoelectric Detectors (Optional)

Operate on the light scattering principle using a LED light source. Detector shall respond to both flaming and smoldering fires. Detectors shall be factory set for sensitivity and shall require no field adjustments of any kind. Detectors shall have an obscurztion rating in accordance with UL 268.

C. Detector Spacing and Location

Detector spacing and location shall be in accordance with the manufacturer's recommendations and the requirements of NFPA 72, except provide at least two in all rooms of 54 square meters

or larger in area. In no case shall spacing exceed 9 by 9 m per detector, and 9 linear m per detector along corridors. Detectors shall not be placed closer than 0.9 m from any air discharge or retum grille, nor closer than 300 mm to any part of any lighting fixture.

4. Notification Devices

Provide in accordance with NFPA 72 and as indicated. Do not exceed 80 percent of the listed rating in amperes of any notification device circuit. Additional circuits above those shown shall be provided if required to meet this requirement. Effective sound levels shall comply with NFPA 72. Provide devices in addition to those shown if required in order to meet NFPA 72 sound level requirements.

A. Alarm Horns

Surface-mounted vibrating type suitable for use in an electrically supervised circuit and shall have a sound output rating of at least 90 decibels at 3 m, when tested in accordance with UL 464 while emitting a slow whoop tone.

B. Visible Devices

Surface-mounted assembly of the stroboscopic type suitable for use in an electrically supervised circuit and powered from the notification device circuits. Devices shall provide a minimum of 75 candela measured in accordance with UL 1971, but in no case less than the effective intensity required by NFPA 72 for the device spacing and location shown. Lamps shall be protected by a thermoplastic lens and labeled "FIRE" in letters at least 12 mm high. Provide visible devices within 300 mm of each audible appliance and as indicated. Visible devices may be pan of an audio-visual assembly. Where more than two devices are located in the same room or corridor, provide synchronized operation.

5. Conduit

A. Intermediate Metal Conduit (IMC) UL 1242, zinc-coated steel only.

6. Outlet Boxes I-JL 514A, zinc-coated steel.

7. Fittings for Conduit and Outlet Boxes UL 514B, zinc-coated steel.

8. Wiring

NFPA 70, PEC and NFPA 72. Wire for 240V circuits shall be 3.5 mm2 minimum copper conductors. Wire for low voltage DC circuits shall be 2.0 mm2 minimum copper conductors Insulation shall be 75 degree C minimum with nylon jacket. Color codes all wiring.

EXECUTION

INSTALLATION

Installation shall be in accordance with the requirements of NFPA 70, PEC NFPA 72 and NFPA 90A. Each conductor used for the same specific function shall be distinctively color coded. Each function color code shall remain consistent throughout the system. Use colors as directed by the Engineer. All wiring shall be in steel conduit. All circuit conductors shall be identified within each enclosure where a tap, splice or termination is made. Conductor identification shall be by plastic coated self sticking printed markers. The markers shall be attached in a manner that will not permit accidental detachment. Control circuit terminations shall be properly identified. Wre devices so that their removal will activate system trouble signals. Pigtail or 'T' tap connections are prohibited. Wring for DC circuits shall not be

permitted in the same conduit or tubing as wiring for AC circuits. Paint all junction box covers red or provide them with permanent labels reading "FIRE ALARM CIRCUIT." Provide a written schedule of conductor markings identifying each wire marker, the purpose, the origin, and termination point of each conductor. The conductor wire marker schedule shall be turned over to the Engineer at the time of preliminary testing with as built drawings.

1. Additional Installation Requirements

Pull all conductors splice free. Make all conductor connections under screw terminals. Provide insulated barrier type terminal strips at junction points. Use of wire nuts, crimped connectors, or twisting of conductors is prohibited. All control pane's shall be dressed out in a professional manner with all wires running in the vertical or horizontal plane, cut to exact length, making all tums at 90 degree angles, and tightly bundled and wire wrapped. Conduit may not enter the top of control panel cabinet.

FIELD QUALITY CONTROL

1. Preliminary Testing

Notify Engineer prior to performing preliminary testing. Contractor shall conduct the following tests during installation of wiring and system components. Any deficiency pertaining to these requirements shall be corrected by the Contractor prior to final acceptance testing of the system. Record results of testing. Submit all test results to the Engineer.

A. Operation of Entire System. Operate all initiating and indicating devices.

B. Operation of Supervisory Systems: Operate all portions to demonstrate correctness of installation.

C. Smoke Detector Test: Clean the smoke detectors in accordance with the manufacturers recommended procedures. Test smoke detectors using magnet-activated test switch, manufacturer provided test card, or smoke. Use of aerosol sprays to test smoke detectors is prohibited.

2. Final Acceptance Testing

The Contractor shall notify the Engineer when the system is ready for final acceptance testing. Request scheduling for final acceptance testing only after all necessary preliminary tests have been made and all deficiencies found have been corrected to the satisfaction of the equipment manufacturers technical representative and the Engineer and written certification to this effect has been received by the Fire Protection Engineer. The system shall be in service at least 15 calendar days prior to final acceptance testing. The Contractor shall allow at least 15 calendar days between the dates final testing is requested and the date the final acceptance testing takes place. The Contractor shall furnish all equipment, instruments, devices and personnel for this test. The system shall be tested for approval in the presence of representatives of the manufacturer, the Engineer, and the Fire Protection Engineer. All necessary tests shall be made including the following, and any deficiency found shall be corrected and the system retested.

A. Entire System

Test the entire system by operating all fire alarm initiating, notification, and signaling devices. Perform tests with the system operating on primary power and repeat the test with the system operating on battery power only. Provide necessary equipment to test smoke detectors and heat detectors.

B. Supervisory Systems

All aspects of the supervisory functions of the systems shall be operated. Introduce faults in each circuit at random locations as directed by the Fire Protection Engineer. Verify proper trouble annunciation at the control panel.

3. Additional Tests

When deficiencies, defects or develop during the tests required, all further testing of the system shall be suspended until proper adjustments, corrections or revisions have been made to assure proper performance of the system. If these revisions require more than a nominal delay, the Engineer shall be notified when the additional work has been completed, to arrange a new inspection and test of the fire alarm system. All tests required shall be repeated prior to final acceptance, unless directed otherwise.

ITEM 11 : EXHAUST EQUIPMENT

GENERAL

"Mechanical General Requirements" applies to this Item with additions and modification specified herein.

SCOPE OF WORK

1. Furnish materials that are new, of first-class quality.

2. Install all materials in strict accordance with the manufacturer's instructions and specifications.

MATERIAL REQUIREMENTS

1. Bathroom Ceiling Mounted Exhaust Fan

   The exhaust fans shall be of the built-in ceiling type, ceiling mounted, suitable for operation. Sizes and capacities are based on models or approved equal. Brand and models indicated herein is for the purpose of establishing product quality, capacities and dimensions. Other brands satisfying the same shall likewise be accepted, subject to the approval of the owner and Engineer In-Charge. The capacities of the units shall be as shown on the Drawings.

2. Wall Mounted Propeller Exhaust Fan (Optional)

   The wall-mounted propeller exhaust fan shall be direct-dive three blade type with a steel mounting plate. Capacity of the fan shall be as shown on the drawings. Fan blades shall be constructed of steel or aluminum. The fan hub shall be of heavy construction and shall be of steel or semi-steel, and the blades shall be riveted to the hub. Fan blade shall be quiet in operation and shall be statically and dynamically balanced at the factory. Motor and Drive shall be of the condenser motor type, tightly sealed and dust proof with non-lubricating ball bearings. The fan shall be provided with automatic shutters to prevent air from re-entering the fan when fan is off. The fan control switch shall be located as near as possible to the fan.

EXECUTION

1. Install the fan securely to the ceiling.

2. Install back-draft dampers and check to make sure they are free to open and close.

3. Connect power and check rotation of fan.

ITEM 12 : FINISHES (INDENT ORDERS)

GENERAL

The contractor should observe special consideration to indent order items that require longer lead time and checking of material availability under specified conditions of sale, the acceptance of which by the supplier constitutes a contract of sale.

The following are listed as the indent items:

1. 12mm thick Phenolic Toilet Partition and accessories
2. Aluminum Composite Panels
3. Photoluminescent Signs and markings
4. Modular Furnitures
5. Signages and logos

ITEM 13 : CARPENTRY AND JOINERY WORKS

SCOPE OF WORK

The work shall consist of furnishing all tools, labor, equipment and materials, unless otherwise specified to complete all carpentry and joinery works shown on the Drawings and specified herein.

GENERAL REQUIREMENTS

A. Lumber Grades

Lumber shall be of the best grade available, of the respective kinds required for the various parts of work; well seasoned, thoroughly dry and free from loose or unsound knots, sap, shakes or other imperfections impairing its strengths, durability and appearance. Al exposed woodwork shall be smooth by dressed and sandpapered unless otherwise indicated or specified. Framing lumber shall be of the rough dimensions unless otherwise shown on the drawings.

B. Substitution of Lumber

Any lumber equally good for the purpose intended maybe substituted for the kind specified, subject to prior written approval of the Engineer. Provided, however, that in the substitution of the cheaper kind of lumber than that specified, a reduction in the contract price equal to the difference in the costs of the two kinds of lumber shall be made.

C. Delivery and Storage

The Contractor shall deliver lumber to the site in undamaged condition. Lumber shall be stacked in such a manner as to ensure proper ventilation and drainage, and shall be supported at least 150 mm above-ground. Lumber shall be protected against dampness before and after delivery, and enough protection under cover in well ventilated enclosure, not exposed to extreme changes of temperature and humidity; and in a manner as to provide air-circulation around all surfaces of each pile to insure thorough air-seasoning. Lumber or millwork in buildings shall not be finished until concrete, masonry work and plaster are dry. Lumber shall be delivered at least thirty (30) days before use.

D. Grading of Plywood

Each sheet of plywood shall bear the mark identifying the plywood as to wood species, glue type and grade.

MATERIAL REQUIREMENTS

A. Lumber

Lumber for various uses shall be one of the species listed for the purpose indicated unless otherwise specified in the drawing. For any use not specified, the lumber shall be the best commercial grade normally used for the purpose, subject to the approval of the Engineer.

All framings shall be done as far as possible with carefully fitted mortise and tenon joints.

All doors, windows, transoms, or other opening where so indicated on plans, shall have frames and sills of the dimensions shown or as hereafter detailed, and all frames coming in contact with concrete

shall be anchored by means of 20-d nails, spaced not more than 0.20m, apart, all around the contract surfaces. All frames shall be rabetted , molded and cut with saw and cut under for water drips.

SPECIE	U S E
Yakal	All door jambs, headers and transom bars, wood plates and all other woodwork in contact with concrete or mason and where indicated.
Apitong (pressure treated)	All truss members end rafters and where indicated; all wood framings and carpentry, except when in contact with concrete.
Tanguile (Kiln dried)	All exterior and interior mill work, siding, finish and trim, frame work and all other wood works not specifically mentioned; except when in contact with concrete.

B. Plywood

Plywood shall conform to Commercial Standard PSI and shall be of local manufacture.

Plywood to be varnished shall be tanguile or kalantas veneers (as indicated), ribbon grained, water resistant, Class B and of the thickness indicated.

Plywood to be painted shall be tanguile veneer ordinary rotary-cut, water resistant, Class C and of thickness indicated.

Plywood exposed to the outside elements or where indicated shall be waterproof or marine plywood and of the thickness indicated.

C. Fastenings

Fastenings shall be common nails, glue or specified, flat-head wood screws (F.H.W.S.), rough-head wood screws (R.H.W.S.), bolts or lag screws where specified or called for shall be used. Conceal fastenings as much as possible; where not possible, locate them in inconspicuous places, where nailing is permitted through woodwork smooth-finished face, conceal nail heads.

1. Nails

Shall be of the smooth shank, zinc coated, common wire nails of locat manufacture, and of types and sizes best suited for the purpose.

2. Wood Screw

Shall be brass or cadmium plated of the best available commercial quality, and of types and sizes suited for the purpose.

A. Preservative Treatment

All lumber indicated to be pressure treated, shall contain any of the following net retention of solid preservative.

a. Boliden Salts - 45.5 kg. dry chemical per cubic foot of wood
b. Wolman Salts - 0.31 kg. dry chemical per cubic foot of wood
c. Tenalith Salts - 0.34 kg. dry chemical per cubic foot of wood

The Contractor shall submit an affidavit signed by an official of the preservative treatment company to the Engineer. This affidavit shall indicate the net retention of solid preservatives obtained and shall certify that pressure treated lumbers have a moisture content that does not exceed 17 percent upon shipment from the treatment plant.

Where it is necessary to cut or bore pressure-treated lumber on the job, two coats of prepared concentrated preservatives solution shall be applied to the end-cut or bored surfaces.

ROUGH CARPENTRY

All work shall be well fitted, accurately set, and rigidly secured in place. Anchors and bolts (with nuts and washers) straps and tie rods shall be provided as required.

a. Cutting and Fitting

Cutting and fitting to accommodate other work shall be done in the required manner, and cut or damaged work shall be patched and made good.

b. Framing and Structural

Framing and structural lumber shall be well-seasoned, straight, square-edge stacks, and free from loose or unsound knots, bark edges or other defects that will impair its strength.

c. Plates for Walls and Partitions

Plates for walls and partitions shall be of the same width as the studs and shall form continuous horizontal ties.

Structural members shall not be cut, bored or notched for the passage of pipes or conduits without prior approval of the Engineer. All members damaged by such cutting or boring shall be reinforced by means of specially formed and approved sheet metal or steel shapes or remove or replaced with new member as directed.

Anchors, connectors and fastenings not indicated or specified otherwise shall be of the size and types necessary to suit the conditions encountered. Size, type and spacing of nails, screws or bolts for installation of manufactured building materials shall be as recommended by the product manufacturer unless indicated or specified otherwise.

Rough hardware. exposed to weather or in contact with exterior walls or masonry or slabs shall be zinc-coated except as specified otherwise.

All lumber surfaces in contact with concrete or masonry shall be given a brush coat of bituminous paint before installation.

JOINERY WORK

All lumber used for the joinery work shall be of the kinds and grades specified and shall be of the contours, patterns and profiles indicated.

All joints shall be made, installed tight and securely fastened in a manner approved by the Engineer.

Exterior joints shall be mitered and interior angles coped. Panels shall be fitted to allow for shrinkage, avoid swelling, and insure that the work remain in place without warping, splitting and opening of joints.

Interior trims shall be approved standard stock moldings, except where special patterns or profiles are indicated.

Joints for cabinet work shall be glued in addition to nails or other fastening device required. Nailing shall be concealed where practicable. Where face nailing is used, nails shall be set for putty stopping.

All exposed surfaces shall be machined or hand sanded finished to an even smooth surface. No hammer marks or other unsightly marks shall be allowed on any wood panel or veneer.

INTRODUCTION

a. Wood Laminate

A wood laminate is a thin sheet of material used to cover the core of a wood project in order to change the appearance of the material. Laminates may be any material, but typically they are made veneers, which are thin sheets of wood.

High-pressure decorative laminates are characterized by their qualities, durability, and functional performance. High-pressure laminate sheets are available in a wide variety of colours, patterns and surface finishes. They are resistant to wear, scratching, impact, moisture, heat, and staining; and possess good hygienic and anti-static properties, being easy to clean and maintain.

b. Wood-plastic composite

Wood-Plastic Composite architectural products are a sustainable timber alternative with added benefits such as durability and strength.

SCOPE OF WORK

This item shall consist of furnishing all wood laminates and wood composite panels materials, labor, tools and equipment required in undertaking the proper installation as shown on the Plans and in accordance with this specifications.

SPECIFICATIONS

a. Wood Laminates: 6mm THK substrate laminated on HPL Accent Matte Finish for Interior Cladding or any approved equivalent by the designing Architect.

b. Wood Composite Panels: Supply and Installation of Wood-Plastic Composite panels in sizes: 500mm X 45mm X 50mm including angle bracket support or any approved equivalent by the designing Architect.

SUBMITTALS

a. Product Data

Manufacturers printed product literature, specifications, and data sheets

b. Shop Drawings

Indicate project layout; dimensions and thickness of panels; connections; details and locations of joints and sealant; methods of anchorage; number of anchors; supports; reinforcement; flashings;

accessories; materials; and finishes.

c. Samples

1. Sample materials for selection and verification of finishes, colors, and textures.

2. Sample of panel assembly.

QUALITY ASSURANCE

a. Fabricator I installer to be accepted by the manufacturer.

b. Fabricator I installer to have work similar in scope and size to this project.

c. Take field measurements prior to completion of shop manufacture or fabrication. Coordinate fabrication schedule with construction progress to avoid delay of work. Field fabrication should be allowed to ensure proper fit and keep it to minimum with majority of fabrication being done under controlled shop conditions.

PREPARATION

Ensure surfaces to receive wood laminates and wood-plastic composite panels are structurally leveled, even, smooth, dean, dry, and free from defects detrimental to work. Notify consultant thru writing of conditions unfavorable to proper and timely completion of work. Do not proceed with erection until unsatisfactory conditions have been corrected.

ACCESSORIES

Screws, nuts, washers, bolts, rivets, angle bars and other miscellaneous fastening devices shall be made of non-corrosive materials such as aluminum and stainless steel.

ITEM 14 : ALUMINUM COMPOSITE PANEL

INTRODUCTION

A. MATERIAL COMPOSITION

Aluminum Composite Panel (ACP) is a lightweight durable panel made of laminated aluminum and polyethylene core compound, coated with an advanced fluorocarbon paint Polyvinylidine Flouride (PVDF) to ensure the excellent durability of the surface finish. It is an excellent material for exterior and Interior cladding of new building construction as well as retro fit applications.

It also has a high degree of levelness top reserve the fine architectural design and can be roller bended to suit various design shapes. The laminated structure of ACP ensures exceptional strength of the panel.

THICKNESSES:

3mm (Polyester) 4 to 6mmPVDFI+Nano

B. CHARACTERISTICS

1. Flatness—as the composite material is rigid, the flat surface can be preserved. This is considered a major advantage of ACP.

2. Fire Resistance—ACP are laminated at Temperatures from 200° to 250° to bond aluminum sheets to the polyethylene core. The non-flammable aluminum cover sheets protect the plastic core.

3. Light Weight—as the weight is less than 1/2 to 1/3 of the weight of porcelain enamel, iron, copper, stainless and other metal panels, consequently it can reduce the weight of the building.

4. Durability—ACP is highly resistant to chemical corrosion due to the PVDF coating. The composite material is rigid, resistant to blows, breakage, and pressure and has high bending and breaking strength.

SPECIFICATION

1. Aluminum Composite Panel (ACP) must be composed of density polyethylene core sandwiched between sheets of aluminum.

2. It must be strong, lightweight approximately 5.5kg/sqm. But must be exceptionally flat.

3. The ACP composition

   a) Two sheets of aluminum
   b) Front side aluminum roll coated with polyvinylidine fluoride PVDF according to AAMA605.2 requirements

4. PVDF coating finish adhere to the following standards.

Testing Rem	Standard	Result
Finished coat thickness	ISO 2360(CNS 8406)	27.6m
Gloss	ASTM D532-89	20-45%
Pencil hardness	ASTM D3363-00	2H
Toughness	ASTM D4145-83	2T no rift
Adhesive force	ASTM 3359-97	4B
Impact Resistance	ASTM D2794-93	>100 kg.cm.
Abrasion resistance	ASTM D968-93	64.6L/mil
Mortar resistarce	ASTM 605.2-90	24 Hrs. pat test exceed
Humidity resistance	ASTM D714-97	3000 hr no blister
	ASTM D247-02	
Boiling-water resistance	ASTM D3359-B	Passed
Salt-spray resistance	ASTM D117-03	3000 hr no blister
Acid resistance	ASTM D1308-87	No effect
	AAMA 605.2-91, TEST #7,7.31	
Alkali resistance	ASTM D1308-87	Passed
Solvent resistance	ASTM D2248-73	Passed
	ECCATT5 & NCCA No. 11-1B	
Color retention	ASTM D2244-93	$\triangle E = 0.34$
Chalk resistance	ASTM D4214-98	No chalking
Gloss retantion	ASTM D2244-93	84.2%

5. Total thickness must be 4.0mm minimum (standard).

6. Framing must also be made of aluminum to prevent corrosion of the panels.

7. Aluminum Composite panel supplier must be the same company that will install the framing and will fabricate and install all panels. This is to insure optimum workmanship. All labor and installation must have a warranty of not less than one year.

METHODOLOGY

SUBMITTALS

A. PRODUCT DATA

Manufacturer's printed product literature, specifications, and data sheets

B. SHOP DRAWINGS

I. Indicate project layout and elevations; dimensions and thickness of panels; connections; details and locations of joints and sealant; methods of anchorage; number of anchors; supports; reinforcement; flashings; accessories; materials; and finishes.

II.Indicate proposed joints details providing watertight and structurally sound panel system that allows no uncontrolled water penetration on inside face of panel system as determined by ASTME331.

C. SAMPLES

1. Sample of panel system materials for selection and verification of finishes, colors, and sealant colors.

2. Sample of panel assembly.

D. TEST REPORTS (as requested)

Certified test reports for ACP from approved independent testing laboratories indicating compliance with specifications for specified performance, characteristics, and physical properties.

III. QUALITY ASSURANCE

A. Fabricator I installer to be accepted by the manufacturer.

B. Fabricator / installer to have work similar in scope and size to this project.

C. Take field measurements prior to completion of shop fabrication. Coordinate fabrication schedule with construction progress to avoid delay of work. Field fabrication should be allowed to ensure proper fit and keep it to minimum with majority of fabrication being done under controlled shop conditions.

D. Maximum deviation from vertical and horizontal alignment of erected panels should be made.

E. Assume responsibility for components of exterior panel system including, but not limited to, attachment to sub-construction, panel-to-panel joinery, panel-to-dissimilar material joinery, and joint seal associated with panel system.

IV. DELIVERY, STORAGE, and HANDLING

A. Cover exposed surfaces with pressure-sensitive heavy protection paper or apply strippable plastic coating, before shipping to the job site.

B. Leave protective covering in place until final cleaning of building.

C. Deliver materials in (manufacturers) original sealed packaging.

D. Store panels and accessories in a dry, secure location and protect from weather.

E. Protect finish and edges of panel.

IV. LOADING AND UNLOADING

A. Panels must be handled carefully to prevent damage

B. Panels may buckle if they are not properly supported.

A forklift may be used for panels up to 10 feet (3 meters) long. However, some means of supporting the panel load over a longer distance from the forks may be used.

VI. PREPARATION

Ensure surfaces to receive panels are structurally sound, even, smooth, clean, dry, and free from defects detrimental to work. Notify consultant thru writing of conditions unfavorable to proper and timely completion of work. Do not proceed with erection until unsatisfactory conditions have been corrected.

VI. ACCESSORIES

A. Extrusions, formed members, sheet, and plate are in accordance with ASTMB209 and recommendations of Manufacturer's

B. Panel stiffeners are structurally fastened or restrained at ends and secured to rear face of ACP with double-sided tape of sufficient size and strength to maintain panel flatness.

C. Sealant within panel system to conform with Manufacturer's standards to meet performance requirements.

D. Fasteners are not exposed except where unavoidable.

Aluminum Composite Panel Color I Thickness/ Location:

Concrete Canopy	-	4mm thick ACP (As Selected by the Architect)
Parapet Wall	-	4mm thick ACP (As Selected by the Architect)
Exposed Columns	-	4mm thick ACP (As Selected by the Architect)

Details are shown in the plans.

ITEM 15 : HANDRAILS, RAILINGS AND GUARDRAILS

GENERAL

General Requirements contain provisions and requirements essential to these Specifications; and apply to this section, whether or not referred to herein.

SCOPE OF WORK

The work covered by this section consist of furnishing all labor, materials, equipment, tools and incidentals necessary to undertake. complete the installation of handrails, railings and guardrails as indicated on the drawings and as specified herein.

SUBMITTAL

1. Manufacturers technical data for products and processed used in handrails, railing, guardrails system, including finishes and grout.

2. Shop Drawings showing details of fabrication and installation for each type and of handrail, railing, and guardrails required including plans, elevations, sections, profiles of rails, fittings, connections, and anchors.

3. Prepare samples of each type of metal handrails & railings stainless steel hairline finish. mere finish involves normal color and texture variations, include sample sets composed of two or more units showing limits of such variations expected in completed works.

•Include 6^{B} long samples of each distinctly different railing member including guardrails, handrails, top rails, posts, and balusters. Include samples of fittingsand brackets if requested by Architect.

•Include sample of typical welded connection.

QUALITY ASSURANCE

Single Source Responsibility

Obtain handrails, guardrail and railing systems of each type and material from a single manufacturer.

STORAGE

Store handrails, guardrail and railing systems in clean, dry location, away from uncured concrete and masonry, protected against damage of any kind. Cover with waterproof paper, tarpaulin, or polyethylene sheeting; allow for air circulation inside the covering.

FABRICATION

General

Fabricate handrails and railing systems to design, dimensions and details shown. Provide handrail and railing members in sizes and profiles indicated, with supporting posts and brackets or size and spacing shown, but not less than required to comply with requirements indicated for structural performance.

Shop Assembly

Pre-assembled items in shop to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for reassembly and coordinated installation.

Welded Connections

Fabricate handrails, guardrail and railing systems of materials for interconnections of members of welding. Use welding method, which is appropriate for metal and finish, indicated and develops strength required to comply with structural performance criteria. Finish exposed welds and surfaces smooth, flush, and blended to match adjoining surfaces.

Form changes in direction of railing members by bending members by metering, or as indicated on the drawing, as approved by the Architect.

Furnish inserts and other anchorage devices for connecting handrails, guardrail and railing systems to concrete or masonry work. Fabricate anchorage devices, which are capable of withstanding loading imposed by handrails, guardrails and railing systems.

Coordinate anchorage devices with supporting structure.

a. For railing, and guardrail posts set in concrete provide pre-chiseled openings and insert posts as indicated on drawings. Fill opening with non-shrink, non-metallic grout.

MATERIAL REQUIREMENTS

General

Comply with standards indicated for forms and types of metals indicated or required for handrail and railing system components.

a. Stair Railings:

As indicated on plans.

b. Stair Handrail:

As indicated on plans.

c. Guardrail

As indicated on plans.

Refer to plans for the required dimension of various types of stainless steel railings and location.
Fastenings: commercial types, except where special types are shown or required.

Fastenings for all exterior work shall be non-ferrous, unless otherwise shown. Fastenings for steel and aluminum and for all other interior work, where exposed, shall match the fastened metal.

Miscellaneous materials or accessories not listed above shall be provided as specified hereinafter the various items of work and/or indicated on the drawings, or in accordance with manufacturer's specifications.

Execution

PREPARATION

Ensure surfaces to receive panels are structurally sound, even, smooth, clean, dry, and free from defects detrimental to work.

INSTALLATION

a. Safety precaution and procedure shall be observed in determining the sizes and in providing the required clearances by measuring the actual opening to receive the glass.

b. Secure glass with stainless steel brackets.

METAL FINISHES

Comply with NAAMM "Metal Finishes Manual" for recommendations and designations of finishes, except as otherwise indicated.

EXECUTION

PREPARATION

a. Coordinate setting drawings, diagrams, templates, instructions, and directions for installation of anchorages, such as sleeves, concrete inserts, anchor bolts, and miscellaneous items having integral anchors, which are to be embedded in concrete and masonry construction. Coordinate delivery of such items to project site.

b. Field Measurements

Take field measurements prior to fabrication.

INSTALLATION

GENERAL

a. Fit exposed connections accurately together to form tight, hairline joints.

b. Perform cutting, drilling, and fitting required for installation of handrails, guardrail and railing systems. Set work accurately in location, alignment, and elevation, plumb, level, true, and free of rack, measured from established lines and levels.

c. Field Welding

Comply with applicable AWS specification for procedures of manual shielded metal-arc welding, for appearance and quality of welds made, and for methods used in correcting welding work. Weld connections that are not to be left as exposed joints, but cannot be shop welded because of shipping size limitations. Grind exposed welded joints smooth and restore finish to match finish of adjacent rail surfaces.

d. Prior to anchoring, adjust handrails and railing systems to ensure matching alignment at abutting joints. Space posts at interval indicated but not less than that required by design loading.

ANCHORING POSTS

a. Concrete-Anchored Posts: Provide chiseled opening on concrete base as indicated on the drawings to receive railing posts and required anchoring system, holes of all loose material, insert posts, and fill

annular space between post and concrete with non-shrink, non-metallic epoxy grout, mixed and placed to comply with grout manufacturer's directions.

RAILING CONNECTIONS

a. Welded Connections: Use fully welded joints for permanently connecting railing components by welding. Cope or butt components to provide 100 percent contact or use manufacturer's standard fittings designed for this purpose.

ANCHORING RAILING ENDS

a. Anchor railing ends to metal surfaces with manufacturer's standard fittings using concealed fasteners, unless otherwise indicated.

b. Anchor Railing Ends to Concrete or Masonry, use drilled-in expansion shields and concealed hanger bolts, unless otherwise indicated.

PROTECTION

a. Protect finishes of railing, handrails and guardrails system from damage during construction period by use of temporary protective coverings approved by railing manufacturer. Remove protective covering at time of Substantial Completion.

b.Restore finishes damaged during installation and construction period so that no evidence remains of correction work. Return items which cannot be refinished in the field to the shop; make required alterations and refinish entire unit, or provide new units as required.

ITEM 16 : PAINTING

GENERAL

General Requirements contain provisions and requirements essential to these Specifications; and apply to this section, whether or not referred to herein.

SCOPE OF WORK

This Section covers the surface preparation, coating materials and application of coatings systems required for the Works.

The work shall consist of furnishing of all labor, materials, equipment and other incidentals necessary for the supply of painting materials and the complete painting of surfaces as shown on the drawings in accordance with this Specification and as directed by the Engineer.

The term paint as hereinafter used includes emulsion paints, varnishes, oils, pigments, thinner and dryers.

All exposed metal surfaces, except metal surfaces embedded in concrete, shall be painted unless otherwise specified.

STANDARD

The following publications listed below, but referred to thereafter by basic designation only, forms a part of these Specifications to the extent indicated by the reference thereto:

Steel Structures Painting Council (SSPC) U.S. Specification JIS K 5628 Red-lead Zinc Chromate Anti-Corrosive Paint.

SUBMITTAL

1. The Contractor shall submit work method statements with lists of materials to the Engineer for approval twenty-eight days before the starting of works. This statement shall include following items:

    a. Type of paint and manufacturer
    b. Manufacturer's specifications
    c. Storage and delivery of materials
    d. Surface preparation
    e. Finish painting and drying
    f. Touch-up painting, if any
    g. Equipment

2. The Contractor, before placing order for the painting materials, shall submit to the Engineer for approval samples of materials. No placing of orders for material shall be made without his approval.

STORAGE AND DELIVERY

1. The Contractor shall deliver all material to the site in the original labeled sealed cans and containers, with labels intact and seal unbroken.

a. Seals shall remain unbroken until after inspection and acceptance of material by the Engineer.

b. The Contractor shall deliver materials in ample quantities sufficiently in advance of the need to avoid any delay or interruptions in the works.

2. Paint in thinner shall be stored in accordance with the approved manufacturer's instructions.

a. All regulations required for storage of paint shall be observed and all necessary safety signs required by governing codes shall be posted.

b. Any damage caused by failure to exercise proper precautions in paint storage shall be repaired.

MATERIAL REQUIREMENTS

PAINT

Paints for the protective coating system shall be the product of a manufacturer approved by the Engineer.

Paints for exterior finish must be with tile like durability and elegance, fast drying, solvent based acrylic, highly suitable for coastal or polluted areas with excellent anti-fungus properties and alkali resistance.

100% Acrylic, water based, quick-drying, easy to clean-up and environmentally friendly, resist dirt, stains, alkali, water, humidity, algae, mold and mildew growth and highly durable paint for interior finish.

An all-purpose synthetic quick dry paint for all types of wood and metal surfaces. It has high gloss, good color retention and outstanding durability.

For pipes, valves and equipment, galvanized and ungalvanized ferrous metal, use a 100% acrylic gloss paint, has excellent resistance to ultraviolet rays and resists chalking, cracking and color fading, dries fast and environmentally friendly.

SCHEDULE OF PAINTING

Paint manufacturers shall be BOYSEN, DAVIES or approved equal.

Architectural Items	
a. Exterior Finishes	
1. On Concrete Walls	
Three Coats, Concrete Masonry Paint	Elastomeric Paint and Latex Paint or approved equal
2. Unprimed Ferrous Metal	
First Coat	Red Oxide Primer, or approved equal
Second & Third Coat	Quick Dry Enamel or approved equal

3. On Concrete Block Wall	
Masonry Neutralizer	Masonry Neutralizer or approved equal
Three Coats Concrete Masonry Paint	Elastomeric Paint / Latex Paint or approved equal
4. On Wood	
First Coat Exterior Wood Primer	Flatwall Enamel or approved equal
Second & Third Coat Exterior enamel	Quick Drying Enamel or approved equal
b. Interior Finishes Location of the various finishes are listed in the Finish Schedule on the drawings or else will be confirmed by PPA	
1. On primer and coated metal two coats of interior semi-gloss enamel or as indicated in the Schedule finish	Red Oxide Primer, Quick Dry Enamel or approved equal
2. On Plaster	
First Coat	Masonry Neutralizer or approved equal
Three Coats	Elastomeric Paint or approved equal
3. On Wood	
First Coat Enamel undercoater	Flatwall Enamel or approved equal
Second & Third Coat Exterior enamel	Quick Drying Enamel or approved equal
4. Wood Stain Finish	
First Coat Second & Third Coats Fourth & Fifth Coats	Oil Wood Stain , Lacquer Sanding Sealer Clear Gloss Lacquer or approved equal
c. Non – Architectural Items (Piping, valves, equipment, etc.)	
1. Piping, valves, equipment etc. in rooms are to be painted	
2. Galvanized pipes and ducts	
Primer – one coat Finish – one coat	Red Oxide Primer, or approved equal Quick Dry Enamel or approved equal
3. Black steel pipes	
Primer – one coat Finish – one coat	Red Oxide Primer, or approved equal Quick Dry Enamel or approved equal
4. Mechanical Items	
a. Ungalvanized ferrous metal Primer – one coat	Red Oxide Primer, or approved equal

Finish – one coat	Quick Dry Enamel or approved equal or approved equal
b. Galvanized ferrous metal Primer – one coat Finish – one coat	Red Oxide Primer, or approved equal Metal Epoxy Paint or approved equal or approved equal
c. Submerged galvanized ferrous metal Primer – one coat	Red Oxide Primer, or approved equal
d. Buried miscellaneous ferrous surface valves, & flanged joints (excl. pipe) Primer – one coat	Red Oxide Primer, or approved equal

EXECUTION

SURFACE PREPARATION OF STEEL

1. Steel surfaces shall be cleaned as follows:

   a. All round welds, burrs and sharp surface projections shall be ground smooth and all weld splatter shall be removed prior to blast cleaning.

   b. Sand abrasives, if used, shall be clean, and free from salt and extraneous matter. The sand shall pass through a 2.0mm test sieve, and be substantially retained on a 0.18mm test sieve, with at least 25 percent retained on a 0.355mm test sieve.

   c. Metallic abrasive, if used, shall be sharp, hard and free from dust, and shall pass through a 1.8 mm test sieve.

   d. Blast cleaning operations shall not be conducted on surfaces that will be wet after blasting and before coating, or when the surfaces are less than 10°C above degree points, or when the relative humidity of the air is greater than 95 percent.

   e. Any oil, grease, soil, dust or other foreign matter deposited on the cleaned surfaces shall be removed prior to painting. In the event that rusting occurs after completion of the surface preparation, the surfaces shall be cleaned again in accordance with the specified method.

   f. Particular care shall be taken to prevent the contamination of other corrosive chemicals before the application of the paint. Such contamination shall be removed from the cleaned surface by flash blasting and the paint applied immediately.

   g. Care shall be taken to prevent contamination of cleaned and painted surfaces by cleaning operations in an adjacent area.

   h. Surfaces not to be painted shall be suitably protected from the effects of cleaning and painting operations.

SURFACE PREPARATION OF WOOD

1. Wood surfaces shall be sanded to a fresh surface. Surface mould where present, shall be removed by washing, rubbing down and burning off as necessary. Resinous exudation and large knots shall be removed and replaced with filler or other materials approved by the Engineer.

2. Parts of timber to be enclosed in walls shall always be primed unless already impregnated. Priming shall be brushed on and a minimum of two coats applied to end grain. When the priming paint is hard, all cracks, holds, open joints, etc. shall be made good with hard stopping and rubbed down with fine abrasive paper. Priming of joinery shall be applied only on site after the Engineer has approved such joinery and before it is fixed. For internal surfaces primer coats shall be carefully flatted.

SURFACE PREPARATION OF CONCRETE AND PLASTER

Concrete and cement plaster surfaces to be painted shall be prepared by removing efflorescence, dust, dirt, grease, oil, asphalt, tar, excessive mortar and mortar dropping and by roughening to remove glaze. A zinc sulfate solution shall be applied before prime cost.

SURFACE PREPARATION FOR FIBER CEMENT SURFACES

Shall be dry and clean prior to application of the specified first-coat material. Oil, grease, or rust stains shall be carefully removed by the use of suitable solvent. Wire brushing will not be permitted. After the first coat has become dry and prior to application of finish coats, touch-up coats shall be applied to suction spots.

ALUMINUM FRAMES FOR DOORS AND WINDOWS

All metal surfaces shall undergo pre-treatment process which includes: desmutting, water-rinsing, degreasing/etching, water rinsing, zinc phosphating, water rinsing and acid rinsing.

Powder coating application, shall be factory applied and shall be done in one operation using an electro-static powder gun. The materials to be coated should be well connected to earth. Coating thickness should be kept to a minimum of 60 microns for exposed areas. On details which are to be treated mechanically after coating (drilling, sawing, etc.), the coating film must not exceed 100 microns.

The powder coating shall be oven cured in the range of 20 minutes at 220° C (metal temperature measured on the area with greatest metal thickness). The temperature variation in the oven should not exceed +/- 10° C.

Handling

Coated items should be cooled to no less than 40° Centigrade before handling. Precautions should be taken to avoid damages on the finished coating during stacking, storing and transportation.

Storage and Delivery

Inspect materials delivered to the site for damage. Unload and store with minimum handling. Provide storage space in dry location with adequate ventilation, free from dust or water and easily accessible for inspection and handling. Store materials neatly on the floor, properly stacked on non-absorptive strips or wood platforms. Protect finished surfaces during shipping and handling using manufacturer's standard method.

WOOD REPAIR

Badly decayed areas shall be removed and repaired. Areas and pieces decayed beyond repair shall be replaced with new pieces that match originals in all respects. Moderately decayed areas, weathered, or gouged wood shall be patched with approved patching compounds, and shall be sanded smooth. The source or cause of wood decay shall be identified and corrected prior to application of patching materials. Wet wood shall be completely dried to a moisture content not exceeding 12 percent, as measured by a moisture meter, to its full depth before patching, unless otherwise authorized. Wood that is to be patched shall be clean of dust, grease, and loose paint.

1. Epoxy Wood Repair

   Epoxy wood repair materials shall be applied in accordance with manufacturer's written instructions. Health and safety instructions shall be followed in accordance with the manufacturer's instructions. Clean mixing equipment shall be used to avoid contamination. Mix and proportions shall be as directed by the manufacturer. Batches shall be only large enough to complete the specific job intended. Patching materials shall be completely cured before painting or reinstallation of patched pieces.

2. Epoxy Consolidant and Epoxy Paste

   Epoxy liquid wood consolidant shall be used:

   1. To penetrate and impregnate deteriorated wood sections in order to reinforce wood fibers that have become softened or absorbent.

   2. As a primer for areas that are to receive epoxy paste filler. Epoxy paste shall be used to fill areas where portions of wood are missing such as holes, cracks, gaps, gouges, and other voids.

MIXING AND THINNING

Mixing and thinning of paint shall be done in accordance with the approved manufacturer's printed instructions. The pot life of each paint as stated by the manufacturer shall not be exceeded.

WEATHER CONDITION

The paint shall not be applied when the relative humidity is above 85 percent. The paint shall not be applied in rain, wind, fog, dust or mist.

APPLICATION

Workmanship shall be first class in every respect. All work shall be done in a workmanship manner so that the finished surfaces shall be free from runs, chop, ridges, waves, laps and unnecessary brush marks. All coats shall be applied in such manner as to produce an even film of uniform thickness. Edges, corners, crevices, welds and rivets shall receive special attention to ensure that they receive an adequate thickness of paint.

All painting shall be done by thoroughly experienced workmen.

Safety regulations shall be adhered to at all times, including the wearing of respirators by persons engaged on assisting in spray painting. Adjacent areas and installation shall be protected by the use of cloths or other approved precautionary measures.

Plain enamel and varnish shall be applied carefully with good clean brushes or approved spraying equipment, except that the initial coat on any surface shall be applied with brush. Sufficient time shall be allowed between coats to assure thorough drying and each coat shall be in proper condition before receiving the next coat.

Sanding and dusting as required shall be performed between coats in varnishing work. Finish coat shall be smooth and free from runs, sags, and other defects. Exterior paint shall not be applied during rainy days.

All paint when applied shall provide a satisfactory film and smooth, even surface. Paint shall be thoroughly stirred and kept at a uniform consistency during application. Powdered metallic pigments added at the time of use shall be mixed by adding the powder in small increments to about one-third of the base paint or vehicle, with thorough mixing to obtain a smooth paste. The remainder of the base paint shall then be thoroughly stirred in.

Different brands of emulsion paints shall not be mixed prior to application of the materials.

Where necessary to suit conditions of surface temperature, weather and method of application, the package paint may be thinned immediately prior to application in accordance with the approved manufacturer's directions, but not in excess of 125 cc of suitable thinner per liter (one pint per gallon). Before using, the paint shall be mixed to a uniform consistency and shall be stirred frequently during application.

Paints other than water-thinned paints shall be applied only to surfaces which are completely free of moisture as determined by sight or touch and only such combinations of humidity to be painted as will cause evaporation rather than condensation.

Surfaces which have been cleaned, pretreated and/or otherwise been prepared for painting shall be primed or painted with one coat of finish paint as soon as practicable after such preparation has been completed, but in any event prior to any deterioration of the prepared surfaces.

The first coat of paint on all exterior surfaces shall be applied by brush. Interior prime coats and all other subsequent coats on either exterior or interior surfaces may be applied by brush or spray. Whenever spraying is permitted all areas inaccessible to spray painting shall be coated by brushing or other suitable means. Brushes to be used for application of water-emulsions shall be soaked in water for a period of 2 hours prior to use.

All cloths and cotton waste which might constitute a fire hazard shall be placed in closed metal containers or destroyed at the end of each day.

Upon completion of the work, all staging, scaffolding, and containers shall be removed from the site or destroyed in a manner approved by the Engineer. Paint spots, or stains upon adjacent surfaces shall be removed and the entire job left clean and acceptable to the Engineer.

No smoking shall be permitted in the vicinity where painting is going on.

TOUCH-UP PAINTING

Touch-up painting shall be done with the same paint as used for the original coat. The resulting minimum dry film shall be the same as for the original coat.

Touch-up painting shall include cleaning and painting of field connections, welds and all damaged or defective paint and rusted areas.

During touch-up painting, only loose, cracked, brittle or non-adherent paint shall be removed during cleaning. All exposed edges shall be feathered. Touch-up painting shall be performed in a manner which will minimize damage to sound paint. Rust spots shall be thoroughly cleaned and edges of the existing paint shall be scraped back to sound material.

DRYING

1. No primer or paint shall be forced to be dried under conditions which will cause cracking, wrinkling, blistering, formation of pores which would detrimentally affect the condition of the paint.

2. No drier shall be added to the paint unless specified in the approved manufacturer's instructions.

3. Painted surfaces shall be protected from dust, dirt, and the elements of the weather until dry to the fullest extent practicable.

4. After drying, any areas of paint damaged from any cause shall be removed, the surface again prepared and then touched-up with the same paint and to the same thickness as the undamaged areas as specified in sub-section 4.14.3.7 above.

HANDLING

1. Precautions shall be taken to minimize damage to paint films resulting from stacking for drying.

2. Paint which is damaged in handling shall be scraped off and touched-up with the same paint and in the same thickness as was previously applied to the damaged area at Contractor's expense.

INSPECTION

1. All works and materials supplied under this Specification shall be subject to inspection by the Engineer.

2. The Contractor shall correct such works or replace such materials found defective under these Specifications at his own expense.

ITEM 17 : FACILITIES AND DEVICE FOR PERSONS WITH DISABILITY

SCOPE OF WORK

The work shall consist of furnishing materials, tools, labor and incidentals necessary for the construction/installation of facilities and device for disabled persons as shown on the Drawings and in accordance with the Implementing Rules and Regulations of Batas Pambansa Bilang 344 and this Specification.

MATERIAL REQUIREMENTS

GRAPHIC SIGNS

Graphic signs like the International Symbol of Access shall be fabricated from plastic materials, white color with either dark blue background. Letters and symbols shall be laminated and raised from the background.

HANDRAILS

Handrail for ramp shall be 50mmØ tubular stainless steel buff finished. It shall be provided with a small hole as of a Braille system.

GRABRAIL

Grab rail shall be manufactured from gauge 18 tubular stainless steel 25mmØ and provided with safety grip finish.

CONCRETE MATERIALS FOR RAMPS

1. Portland cement shall conform with the requirement of "Reinforced Concrete".

2. Aggregates shall conform with the requirements of "Reinforced Concrete".

3. Temperature bars shall have diameter of 10mm conforming with the requirements of "Concrete Works".

EXECUTION

GRAPHIC SIGNS

1. Directional and information signs, indicating the location of the ramp for physically handicapped persons, shall be installed / placed at the front of the main entrance of the Building. The signed board size and dimensions shall be based on DOTr approved Standard Design, schedule 40, sign post and the text and arrow shall be in accordance with the International Symbol of Access "B". Manual (See attached drawings and tabulation).

2. Signs shall be placed at the entrance and exits of the ramps and toilets, installed at conspicuous locations. The signboards shall be based on DOTr approved Standard Design Manual (See attached drawings and tabulation).

   RAMP

   The ramp shall be constructed as shown on the drawings and with a nonskid surface and tactile strips.

ITEM 18 : TOILET PARTITION

GENERAL

General Requirements contain provisions and requirements essential to these Specifications; and apply to this section, whether or not referred to herein.

SCOPE OF WORK

Furnish and install toilet partitions as shown on drawings and as specified herein.

SUBMITTALS

1. Submit shop drawings indicating elevations of partitions, full scale sections, thickness and gauges of metal, fastenings, proposed method of anchoring, the size and spacing of anchors, details of construction, hardware, fittings, mountings, and other related items and installation details.

2. Submit a sample of each item of hardware, fittings, fastening, and each type of panel. The panel sample shall be cross sectioned not less than 150 mm by 150 mm in size and shall show finish on base material and core of the panel.

3. Submit manufacturer's data literature for each item of hardware, fitting, fastening and each type of panel, complete with description of materials, finishes, and anchoring devices, and appurtenances.

4. Submit one sample of each color of partition for verification that products match the color indicated. Where colors are not indicated, submit the manufacturers standard color samples for selection by the Architect.

DELIVERY AND STORAGE

Deliver materials to the site in original sealed containers or packages, bearing the manufacturer's name, brand designation, specification number, type, style and finish as applicable. Store and handle materials in a manner to protect them from damage.

MATERIALS

Toilet compartments/cubicles - comprising 12mm thk intermediate panels, doors, and partitions/compartments (compact laminated phenolic board) including door frame system urinal divider, cubicle divider, hardware and accessories in stainless finish and all other incidentals to complete.

Sizes, dimensions of doors, cubicles and dividers as shown on plans. Color shall be as selected by Architect.

All the accessories shall be heat chemical and bacteria resistant.

All edges of doors and pilasters are chamfered and finish without any metal trimming.

EXECUTION

INSTALLATION

Installation of toilet partitions and urinal screens shall be in accordance with approved shop drawings and manufacturers installation and directions.

ITEM 19 : SIGNAGES AND LOGO

SCOPE OF WORK

Furnish materials and perform labor to include miscellaneous works required for the installation of room identification for the toilets and port office.

SAMPLE AND SHOP DRAWINGS
The Contractor shall submit samples for approval by the Architect. Notify the Architect for any changes, clarifications and discrepancies.
For the room I.D. full size lettering layout and installation method shall be submitted to the Architect for approval before start of work.

MATERIAL REQUIREMENTS

1. PPA LOGO (Motiff Logo Detail)

- Hot dip Build-up 4.50mm thick Metal sheet screwed at the back.
- Hot dip Build-up 12.5mm thk. Metal Sheet screwed at the back for PPA Logo
- Hot dip Build-up 5.00mm thk. Metal sheet screwed at the back for Port Name Logo

2. PPA LOGO (Entrance Logo Detail)

- Hot dip Build-up 4.50mm thick Metal sheet screwed at the back.
- 5mm thk. Colored Acrylic Plastic Sheet screwed at the back for PPA Logo

3. ROOM MARKERS

Black acrylic letters, 38mm (1-1/2") high on white acrylic background, 63mm (2-1/2") high, with clear acrylic cover. Lengths shall be as required by the full notation therein.

EXECUTION

WORKMANSHIP

Workmanship shall be executed in high quality comparable with artworks.

MOUNTING

For all mounted assemblies, appropriate mounting hardware and connectors which are concealed shall be sufficiently used.

Assemblies shall be mounted plumb, straight, level, and at prescribed heights.

INSTALLATION

Installation shall be done in a secure and permanent manner at prescribed heights and/or layout. The backwall shall not be mutilated. After the dowels are positioned, fill with expanding grout, or other approved fillers, and retouch, flashed to the backwall surface.

ITEM 21 : PROJECT BILLBOARD

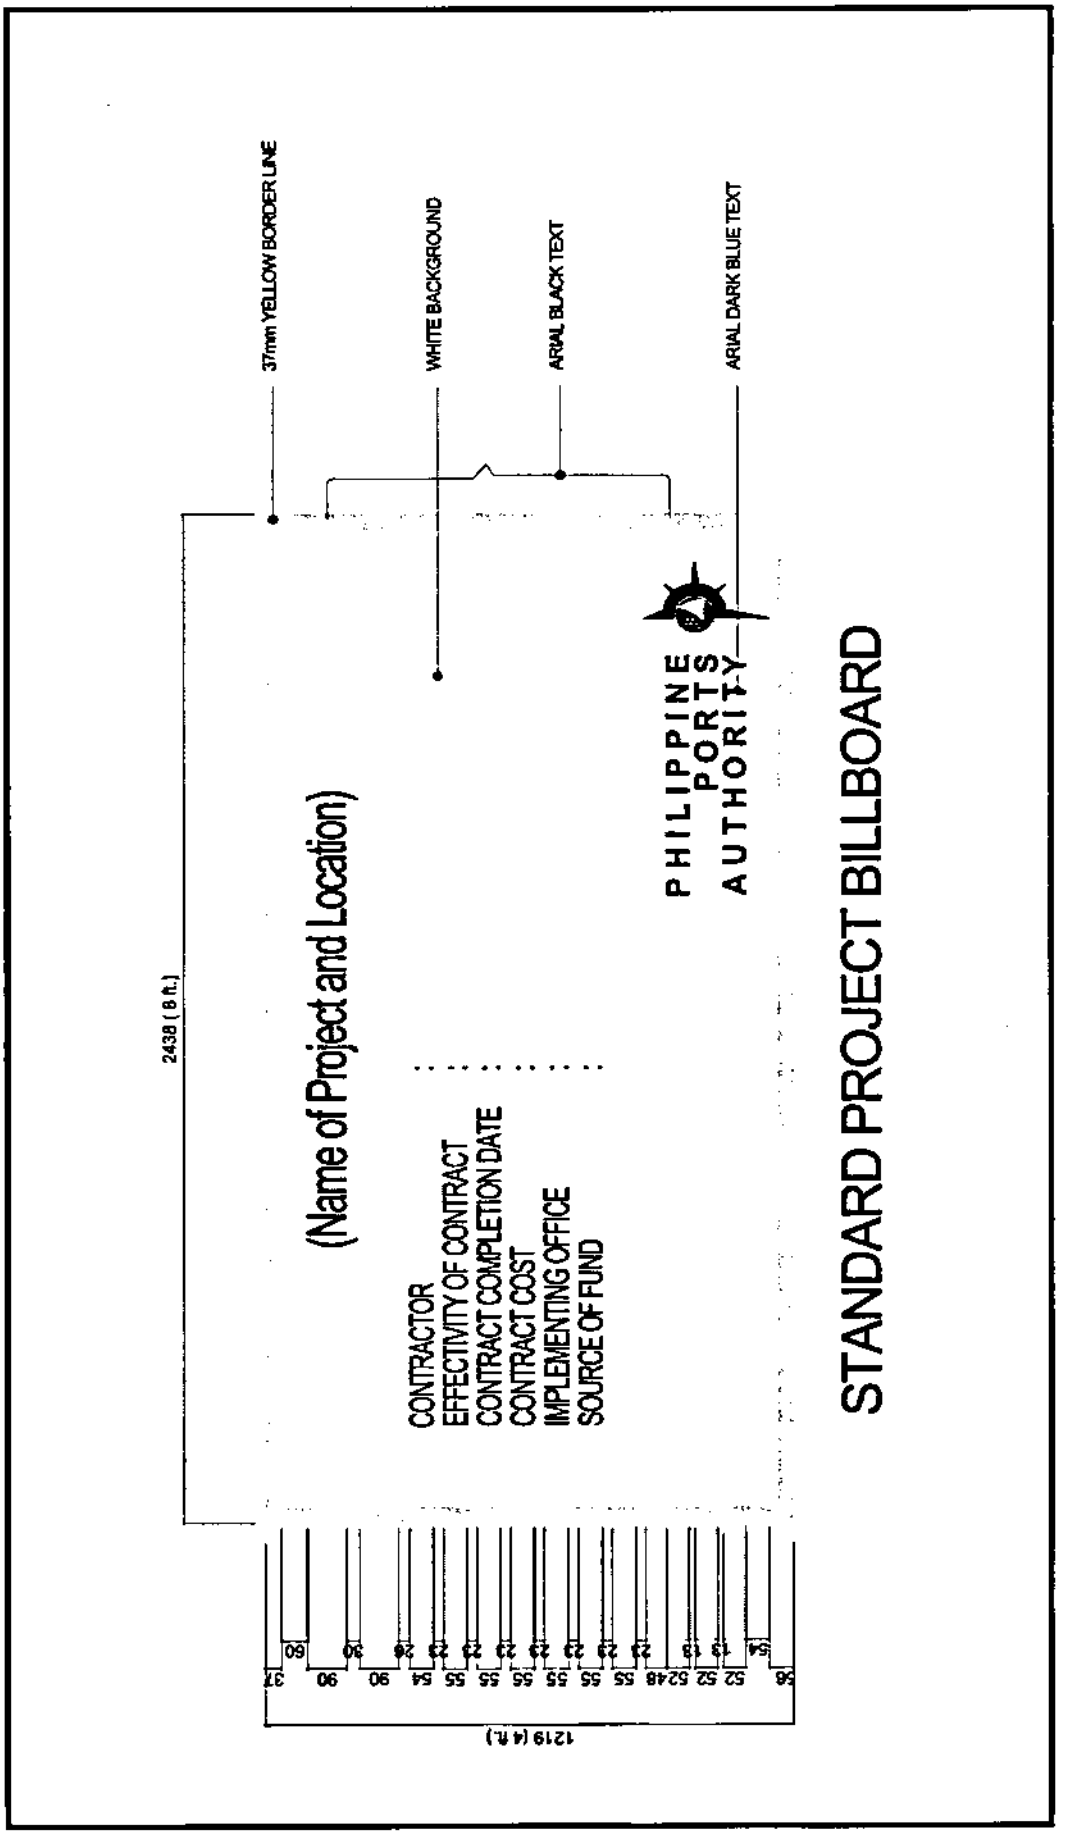
SPECIFICATION

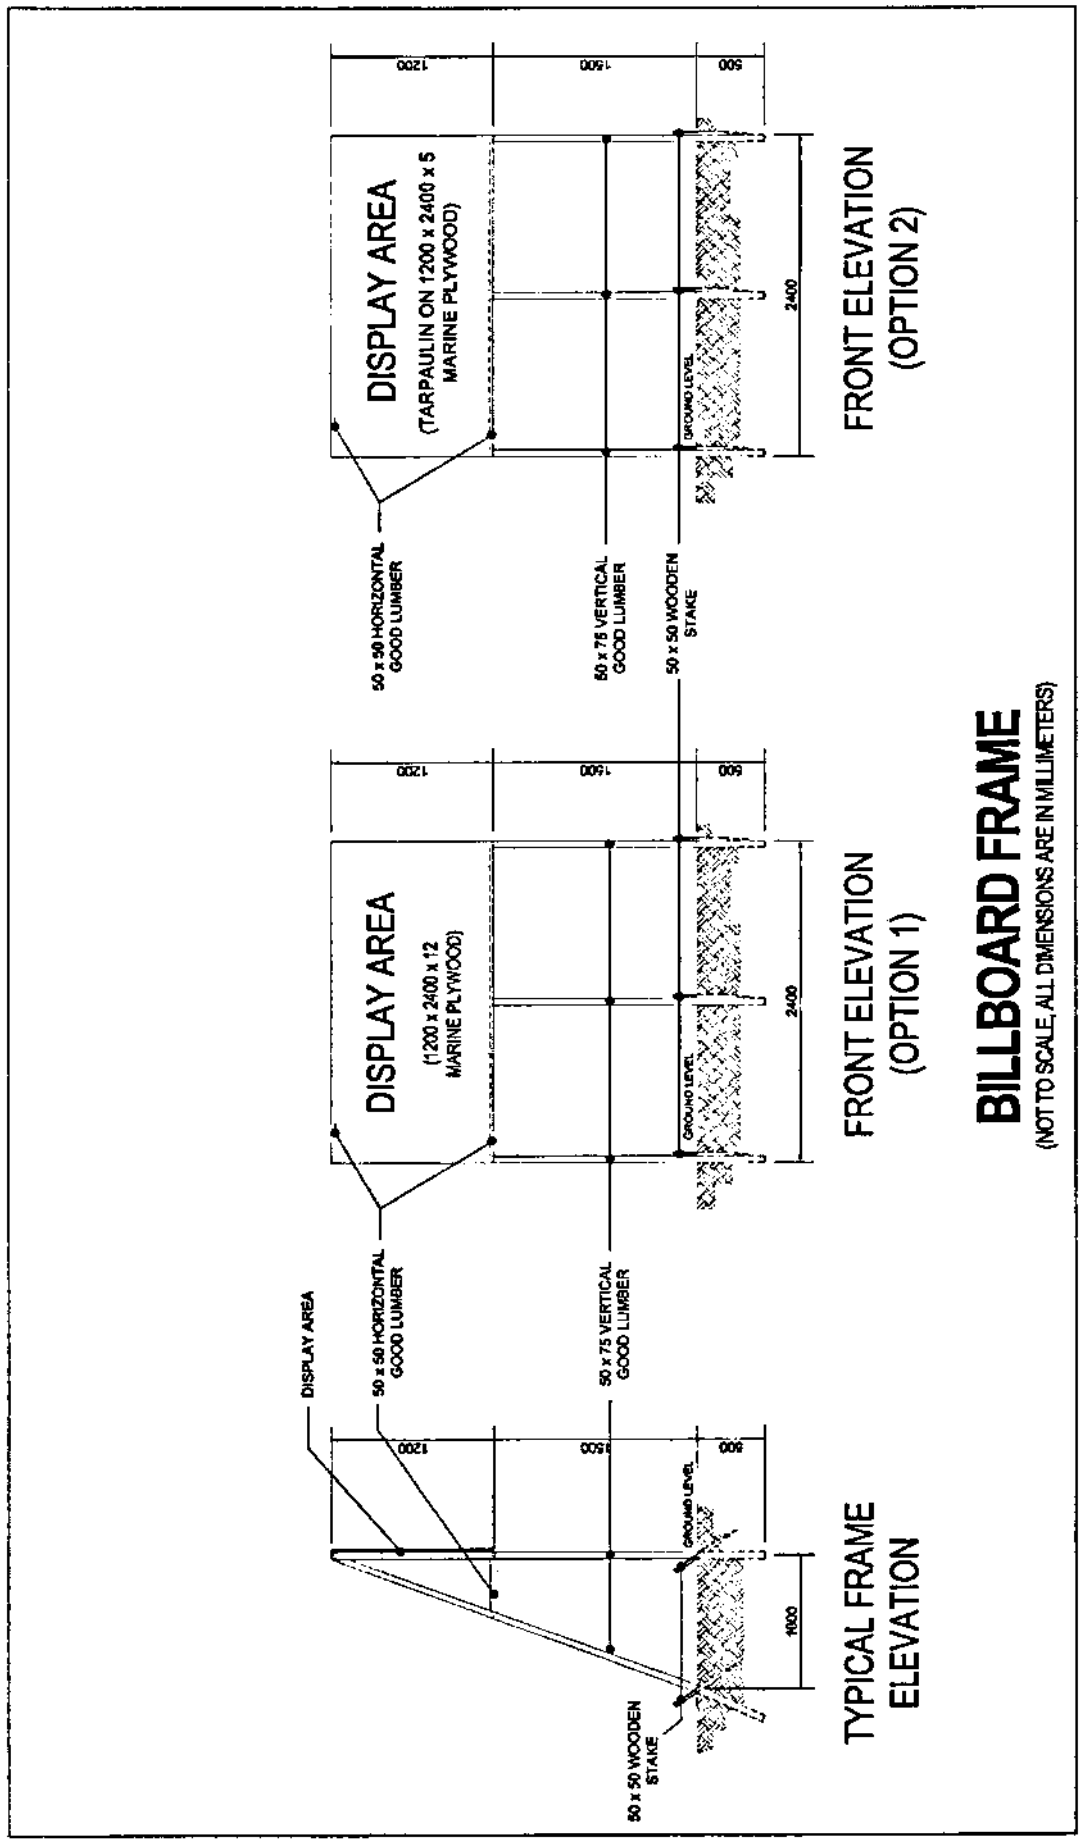
The Project Billboard shall be installed at location(s) designated by the Engineer.

The size and specifications of materials for the standard billboard shall be 4ft. x 8ft. (1,200mm x 2,400mm) using ½ inch (12mm) marine plywood or tarpaulin poster on 3/16 inch (5mm) marine plywood.

Project billboards shall not contain Name(s) and/or picture(s) of any personages.

See attached drawings for further details of the standard billboard.


STANDARD PROJECT BILLBOARD
PHILIPPINE PORTS AUTHORITY
(Name of Project and Location)
CONTRACTOR
EFFECTIVITY OF CONTRACT
CONTRACT COMPLETION DATE
CONTRACT COST
IMPLEMENTING OFFICE
SOURCE OF FUND
37mm YELLOW BORDER LINE
WHITE BACKGROUND
ARIAL BLACK TEXT
ARIAL DARK BLUE TEXT
2438 (8 ft.)
1219 (4 ft.)


BILLBOARD FRAME
(NOT TO SCALE, ALL DIMENSIONS ARE IN MILLIMETERS)
FRONT ELEVATION
(OPTION 2)
DISPLAY AREA
(TARPAULIN ON 1200 x 2400 x 5
MARINE PLYWOOD)
50 x 50 HORIZONTAL
GOOD LUMBER
50 x 75 VERTICAL
GOOD LUMBER
50 x 50 WOODEN
STAKE
GROUND LEVEL
2400
1200
1500
600
FRONT ELEVATION
(OPTION 1)
DISPLAY AREA
(1200 x 2400 x 12
MARINE PLYWOOD)
TYPICAL FRAME
ELEVATION
DISPLAY AREA
1800

ITEM 21 : SAFETY SIGNAGES AND BARRICADES

DESCRIPTION

This work includes the furnishing and installing of safety signages and barricades in accordance with the specifications and to the details shown below in the drawings, or as directed by the Engineer.

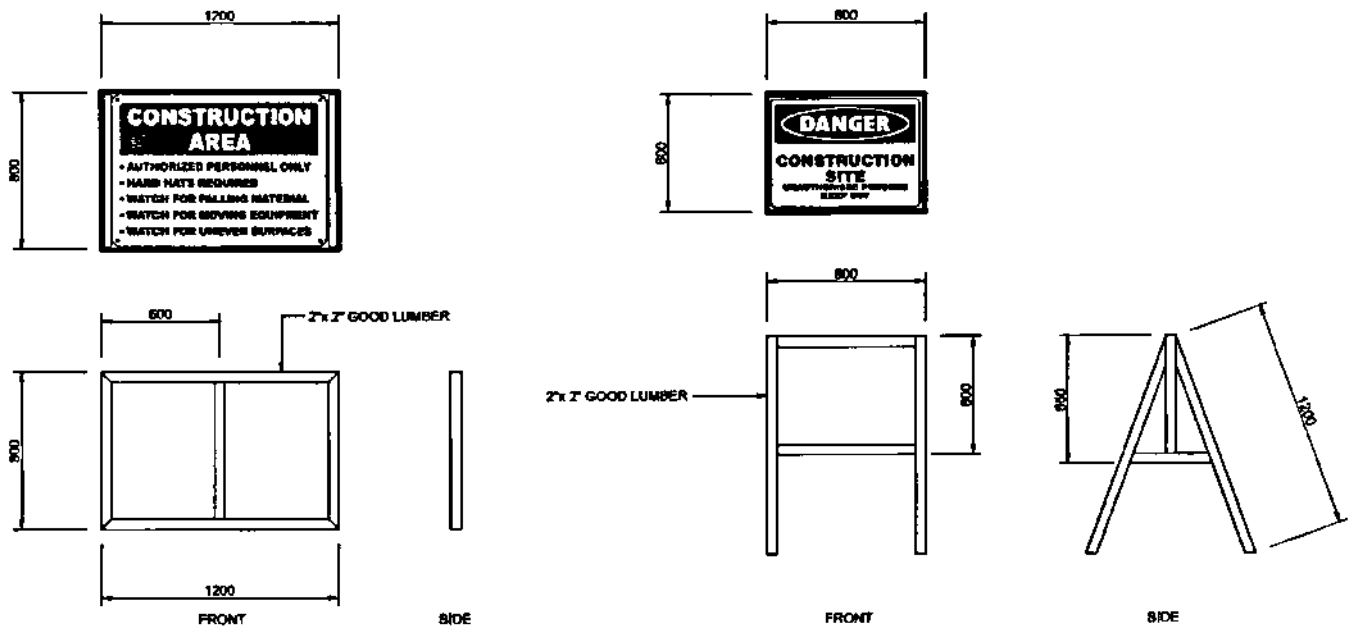
SPECIFICATION

The Signage's and Barricades shall be installed at location(s) designated by the Engineer.

The sizes of the standard signages shall be 2-2/3ft x 4ft (800mm X 1,200mm) for fixed type and 2ft x 2–2/3ft (600mm x 800mm) for mobile type. For barricade standard 2ft x 2–2/3ft (600mm x 800mm) shall be provided.

The materials to be used for signages and barricades are ½ inch (12mm) marine plywood or tarpaulin poster on 2" x 2" (50mm x 50mm) good lumber frame (see drawing below).

The printing or painting shall be the discretion of the Engineer.



FRAMING FOR 0.80m x 1.20m SIGNAGES

FRAMING FOR 0.60m x 0.80m SIGNAGES AND BARRICADES

STANDARD PLAN FOR SIGNAGES AND BARRICADES