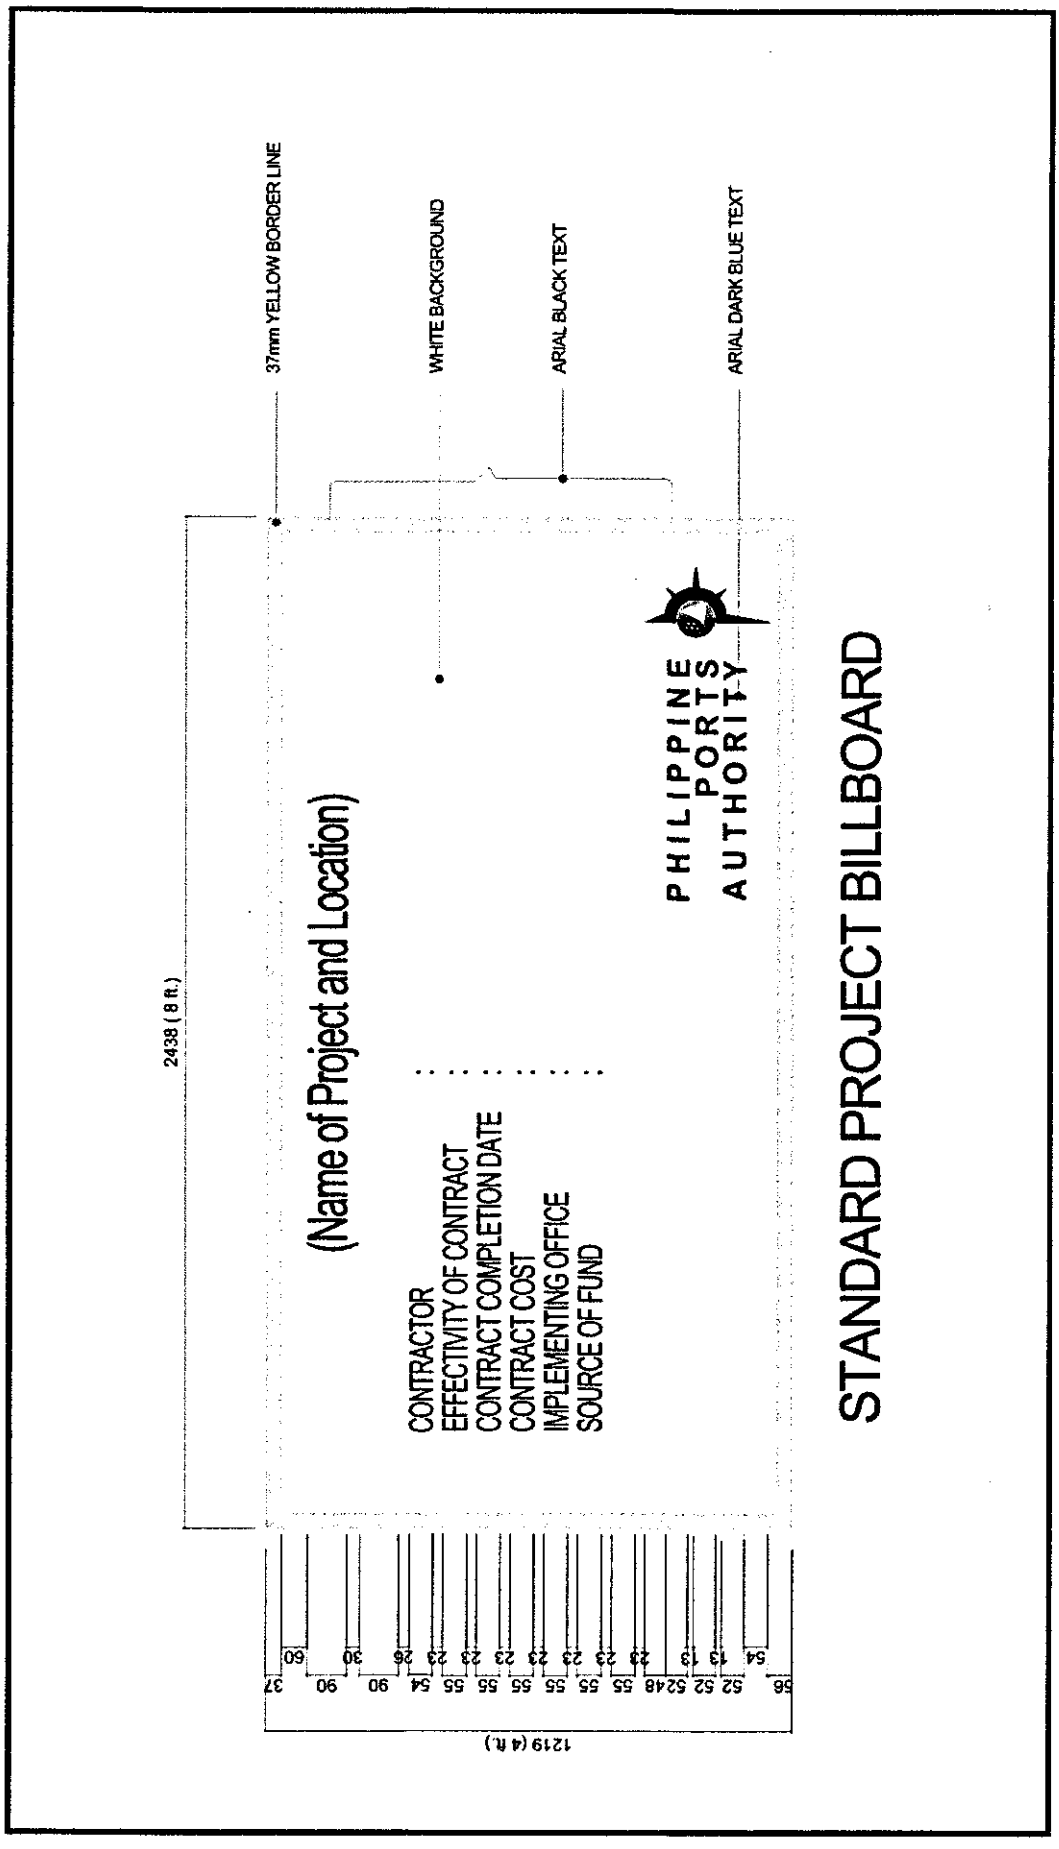
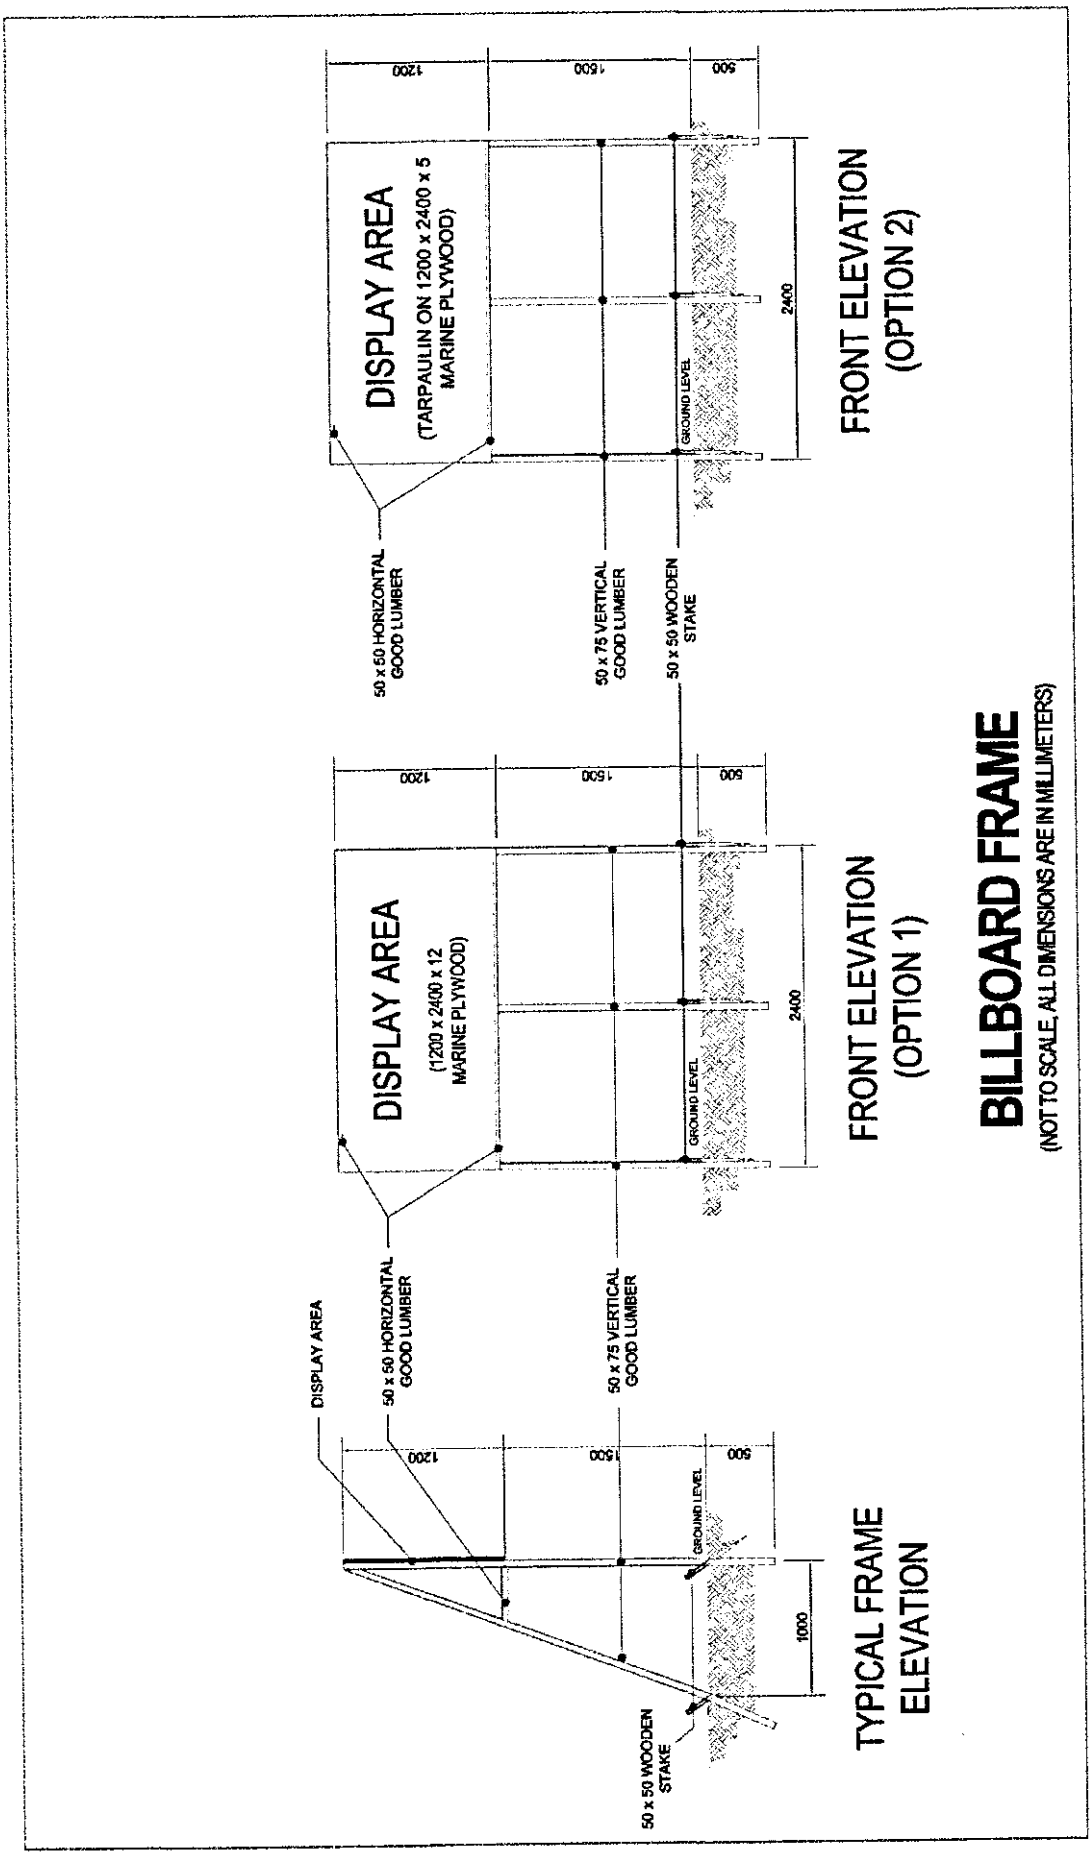

37mm YELLOW BORDER LINE
WHITE BACKGROUND
ARIAL BLACK TEXT
ARIAL DARK BLUE TEXT
2438 (8 ft.)
(Name of Project and Location)
CONTRACTOR
EFFECTIVITY OF CONTRACT
CONTRACT COMPLETION DATE
CONTRACT COST
IMPLEMENTING OFFICE
SOURCE OF FUND
PHILIPPINE PORTS AUTHORITY
STANDARD PROJECT BILLBOARD
1219 (4 ft.)
37 90 90 60 30 26 54 23 55 23 55 23 55


BILLBOARD FRAME
(NOT TO SCALE, ALL DIMENSIONS ARE IN MILLIMETERS)
FRONT ELEVATION
(OPTION 2)
DISPLAY AREA
(TARPAULIN ON 1200 x 2400 x 5
MARINE PLYWOOD)
50 x 50 HORIZONTAL
GOOD LUMBER
50 x 75 VERTICAL
GOOD LUMBER
50 x 50 WOODEN
STAKE
GROUND LEVEL
2400
1200
1500
500
FRONT ELEVATION
(OPTION 1)
DISPLAY AREA
(1200 x 2400 x 12
MARINE PLYWOOD)
TYPICAL FRAME
ELEVATION
DISPLAY AREA
1000

SECTION VII

DRAWINGS (APPROVED PLANS)

DRAWINGS AND APPROVED PLANS
(SEE ISSUED APPROVED PLANS)

LIST OF DRAWINGS:

MARINE STRUCTURES

01 of 06	-	Development Plan, Vicinity Map, General Notes, List of Drawings
02 of 06	-	General Plan
03 of 06	-	Sectional Elevation @ Sta. 0+00, Sectional Elevation @ Sta. 0+20, Sectional Elevation @ Sta. 0+35
04 of 06	-	Sectional Elevation @ Sta. 0+45, Sectional Elevation @ Sta. 0+55, Sectional Elevation @ Sta. 0+65
05 of 06	-	Sectional Elevation A-A, Sectional Elevation B-B, Sectional Elevation C-C
06 of 06	-	Detail of Slotted R.C. Curb, Typical Portland Cement Concrete, Stairlanding Detail, Mooring Cleat Detail

PASSENGER SHED

PS-01 of 13	-	Site Development Plan, Legend, Passenger Shed's Front and Rear Perspective
PS-02 of 13	-	Floor Plan, Reflected Ceiling Plan, Roof Deck Plan, Ground Floor Wall Partition Layout, Roof Deck Wall Partition Layout, Legend
PS-03 of 13	-	Front Elevation, Right Side Elevation, Rear Elevation, Left Side Elevation, Cross Section, Longitudinal Section, Schedule of Doors and Windows
PS-04 of 13	-	Male & Female Toilet Details, Floor Plan, Section A, B, C & D, Flip-Up Bar Details (Typ.), Grab Bar Detail, Mirror Details (Typ.)
PS-05 of 13	-	Ramp Details, Floor Plan, Elevation 1 & 2, Section X & Y, Handrail Connection Detail
PS-06 of 13	-	Foundation Plan, Roof Framing Plan, Detail of Column/ Column Footing, Typical Detail of Section of Beam, Detail of Wall Footing, Detail of Step Up, Detail of Parapet Wall, Reinforcement Slab Detail, Detail of Concrete Bench

PS-07 of 13	-	Site Development Plan, General Notes and Specifications, Material Specification, Schedule of Pipes, Abbreviations & Legends
PS-08 of 13	-	Water Supply Layout Plan, Storm & Drainage Layout Plan, Abbreviations & Legends
PS-09 of 13	-	Storm & Drainage Roof Plan, Water Supply Isometric Layout, Storm & Drainage Isometric Layout, Abbreviations & Legends
PS-10 of 13	-	Details of Septic Tank, Manhole Cover Details, Catch Basin Detail, Urinal Connection Detail, Fixture Mounting Details, Clean Out Detail, Detail of Floor Drain, Typical Detail of Roof Drain, Pipe Penetration on R.C. Wall Detail, Detail of Trenching, Bedding & Backfilling of Pipes
PS-11 of 13	-	Port Lighting Layout, General Notes, Legend, Ductbank
PS-12 of 13	-	Light/ Power Layout Plan, Legend, Load Schedule, Panel Board
PS-13 of 13	-	Integrated Solar Street Light, Specification, Detail of Concrete Pedestal Post

SECTION VIII

BILL OF QUANTITIES and ATTACHMENTS

BID SUMMARY
CONSTRUCTION OF BRGY. PANGAPUYAN COMMUNITY PORT
Pangapuyan Island, Zamboanga City

NO.	DESCRIPTION OF WORK	AMOUNT (PESOS)
BILL NO. 1	GENERAL EXPENSES	
BILL NO. 2	CONSTRUCTION OF BACK UP AREA AND ROCK CAUSEWAY WITH STAIRLANDING	
BILL NO. 3	CONSTRUCTION OF PASSENGER SHED	
BILL NO. 4	REIMBURSABLE ITEM	1,050,000.00
	BID PRICE	

Name of Firm

Name of Bidder/Authorized Representative
Signatory's Legal Capacity

Date

BILL OF QUANTITIES
CONSTRUCTION OF BRGY. PANGAPUYAN COMMUNITY PORT
Pangapuyan Island, Zamboanga City

NO.	DESCRIPTION OF WORK	UNIT	QTY.	UNIT PRICE (Pesos)	AMOUNT (Pesos)
BILL NO.	**1 GENERAL EXPENSES**				
1.01	Mobilization, demobilization and cleaning	lot	1		
1.02	Rental of temporary site office and residence for the Engineer and staff	mo.	13		
1.03	Maintain temporary site office and residence for the Engineer and staff	mo.	13		
1.04	Provide Construction Safety and Health Program in the execution of the project	mo.	13		
	TOTAL FOR BILL NO. 1				

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES
CONSTRUCTION OF BRGY. PANGAPUYAN COMMUNITY PORT
Pangapuyan Island, Zamboanga City

NO.	DESCRIPTION OF WORK	UNIT	QTY.	UNIT PRICE (Pesos)	AMOUNT (Pesos)
BILL NO. 2	CONSTRUCTION OF BACK UP AREA AND ROCK CAUSEWAY WITH STAIRLANDING				
2.01	Remove existing damaged rock causeway including disposal of debris	lot	1		
2.02	Supply and place 50-100 kg./pc core rocks	cu.m.	3,905		
2.03	Supply and place 500 kg/pc armour rocks	cu.m.	2,079		
2.04	Supply and install geotextile filter fabric	sq.m.	1,369		
2.05	Supply and place sand and gravel	cu.m.	2,833		
2.06	Supply, spread and compact aggregate subbase course	cu.m.	596		
2.07	Supply, spread and compact aggregate base course	cu.m.	176		
2.08	Supply, place and compact gravel bedding	cu.m.	2		
2.09	Construct portland cement concrete pavement (250mm thk) including dowel bars	sq.m.	761		
2.10	Supply, fabricate and install steel reinforcements for R.C. curb, stairlanding, lamp post foundation, electrical pedestal and retaining wall	kg.	6,387		
2.11	Supply and place 3,500 psi concrete for R.C. curb, stairlanding, lamp post foundation, and electrical pedestal	cu.m.	143		
2.12	Supply and install mooring cleat including accessories	set	4		
2.13	Supply and install port lighting system	lot	1		
	TOTAL FOR BILL NO. 2				

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES

CONSTRUCTION OF BRGY. PANGAPUYAN COMMUNITY PORT

Pangapuyan Island, Zamboanga City

NO.	DESCRIPTION OF WORK	UNIT	QTY.	UNIT PRICE (Pesos)	AMOUNT (Pesos)
BILL NO.	3 CONSTRUCTION OF PASSENGER SHED				
3.01	Supply, place and compact gravel bedding for building foundation, ramps, step-up and septic vault	cu.m.	16		
3.02	Supply, place and compact aggregate subbase course	cu.m.	24		
3.03	Supply & install steel reinforcement for footing, columns, wall footing, beams, suspended slab, parapet wall, and concrete bench	kg.	8,103		
3.04	Supply & place 3,500 psi concrete for footing, columns, wall footing, beams, suspended slab, parapet wall, and concrete bench	cu.m.	58		
3.05	Construct 3,500 psi concrete slab, step-ups and ramps on-fill including reinforcements	sq.m	136		
3.06	Construct 150 mm thick CHB wall including steel reinforcments	sq.m.	48		
3.07	Construct 100 mm thick CHB wall including steel reinforcements	sq.m.	12		
3.08	Supply and place septic vault	lot	1		
3.09	Supply and place 13 mm thick cement plaster finish (2,500 psi concrete)	sq.m.	138		
3.10	Supply and apply elastomeric paint finish (2-coats)	sq.m.	74		
3.11	Supply and apply flat latex paint (2-coats)	sq.m.	133		
3.12	Supply and apply water proofing	sq.m.	164		
3.13	Supply and apply quick drying enamel paint finish	sq.m.	12		
3.14	Supply and install 0.60 m x 0.60 m unglazed ceramic floor tile finish	sq.m.	119		
3.15	Supply and install 0.30 m x 0.60 m ceramic wall tiles	sq.m.	25		
3.16	Supply and install 12 mm thick synthetic granite	sq.m.	5		

_____

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES

CONSTRUCTION OF BRGY. PANGAPUYAN COMMUNITY PORT

Pangapuyan Island, Zamboanga City

NO.	DESCRIPTION OF WORK	UNIT	QTY.	UNIT PRICE (Pesos)	AMOUNT (Pesos)
3.17	Supply and install 6 mm thick marine plywood on 0.40 mm thick galvanized steel ceiling suspension system @ 0.40m O.C. (Furring), 0.60m O.C. (Carrying Channel) and 1.20 m O.C. B.W. (Suspension Rod) flat enamel paint finish	sq.m.	133		
3.18	Supply and install marine plywood painted with quick drying enamel finish flush door with 900 mm x 300 mm x 2 mm thick stainless steel kickplate satined finish and 7.5 mm braille signage including 150 mm x 50 mm door jamb hinges and lever type lockset (1.1 m x 2.15 m)	lot	1		
3.19	Supply and install 1.5 mm thick aluminum powder coated finish awning window with 8 mm thick reflected tempered glass (1.2 m x 0.6 m)	lot	1		
3.20	Supply and install steel works	set	1		
3.21	Supply and install toilet fixtures and accessories	lot	1		
3.22	Supply and install water line pipes and fittings including accessories	lot	1		
3.23	Supply and install sewerage pipes and fittings including accessories	lot	1		
3.24	Supply and install drainage pipes and fittings including accessories	lot	1		
3.25	Supply and install passenger shed lighting system	lot	1		
	TOTAL FOR BILL NO. 3				

_____

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BILL OF QUANTITIES
CONSTRUCTION OF BRGY. PANGAPUYAN COMMUNITY PORT
Pangapuyan Island, Zamboanga City

NO.	DESCRIPTION OF WORK	UNIT	QTY.	UNIT PRICE (Pesos)	AMOUNT (Pesos)
BILL NO.	4 REIMBURSEABLE ITEM				
4.01	Secure approval of environmental compliance certificate (ECC) including application, clearance and other necessary documentary requirements.	lot	1	1,050,000.00	1,050,000.00
	TOTAL FOR BILL NO. 4				1,050,000.00

Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

BASIS OF PAYMENT FOR WORK ITEMS INCLUDED IN THE PROPOSAL

The work items included in the proposal and the basis of payments are as follows:

BILL NO. 1

GENERAL EXPENSES

Item 1.01 Mobilization, demobilization, and cleaning

The quantity to be paid for shall be the minimum equipment requirement enumerated in the bid documents mobilized, demobilized and cleaning of the site and accepted by the Engineer. The contract lump sum price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to mobilize and demobilize all the minimum equipment requirement enumerated in the bid documents including cleaning of the site. Fifty percent (50%) of the total amount shall be payable after the mobilization activity while the remaining (50%) payable after demobilization and cleaning.

Item 1.02 Rental of temporary site office and residence for the Engineer and staff

The quantity to be paid for shall be the actual rental of site office and residence for the engineer and staff and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary for the provision of temporary site office and residence for the engineer and staff.

Item 1.03 Maintain temporary site office and residence for the Engineer and staff

The quantity to be paid for shall be the actual services rendered in maintaining the site office and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the maintenance of the temporary site office and residence as well as other expenses such as provision for electric power, telephone bill, potable water supply, janitorial and security services.

Item 1.04 Provide construction safety and Health Program in the execution of the project

The quantity to be paid for shall be the actual implementation of construction safety and health program and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the implementation of the Construction Safety and Health Program, as required and approved by the Department of Labor and Employment (DOLE).

BILL NO. 2

CONSTRUCTION OF BACK UP AREA AND ROCK CAUSEWAY WITH STAIRLANDING

Item 2.01 Remove existing damaged rock causeway including disposal of debris

The quantity to be paid for shall be the actual lot of the existing damaged rock causeway to be removed including disposal of debris in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.02 Supply and place 50-100 kg/pc. core rocks

The quantity to be paid for shall be the actual volume in cubic meters of 50-100 kg./pc core rocks to be supplied and placed in accordance with the plans and specifications and accepted by the Engineer. Hydrographic/Topographic Surveys before and after placing of core rocks shall be made to determine the actual elevations along the cross sections and the actual quantities for payment. Volume due to settlement as established using settlement plates shall also be considered for payment. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.03 Supply and place 500 kg/pc armour rocks

The quantity to be paid for shall be the actual volume in cubic meter of 500 kg/pc armour rocks to be supplied and placed in accordance with the plans and specifications and accepted by the Engineer. Hydrographic/Topographic Surveys before and after placing of armour rocks shall be made to determine the actual elevations along the cross sections and the actual quantities for payment. Volume due to settlement as established using settlement plates shall also be considered for payment. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.04 Supply and install geotextile filter fabric

The quantity to be paid for shall be the actual area in square meter of geotextile filter fabric to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.05 Supply and place sand and gravel

The quantity to be paid for shall be the actual volume in cubic meter of sand and gravel to be supplied and placed in accordance with the plans and specifications and accepted by the Engineer. Hydrographic/Topographic Surveys before and after placing of sand and gravel fill shall be made to determine the actual elevations along the cross sections and the actual quantities for payment. Volume due to settlement as established using settlement plates shall also be considered for payment. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.06 Supply, spread and compact aggregate subbase course

The quantity to be paid for shall be the actual volume in cubic meter of aggregate

subbase course to be supplied, spread and compacted in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.07 Supply, spread and compact aggregate base course

The quantity to be paid for shall be the actual volume in cubic meter of aggregate base course to be supplied, spread and compacted in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.08 Supply, place and compact gravel bedding

The quantity to be paid for shall be the actual volume in cubic meter of gravel bedding to be supplied, placed and compacted in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.09 Construct portland cement concrete pavement (250mm thk) including dowel bars

The quantity to be paid for shall be the actual area in square meter of portland cement concrete pavement (250mm thk) including dowel bars to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.10 Supply, fabricate and install steel reinforcements for R.C. curb, stairlanding, lamp post foundation and electrical pedestal

The quantity to be paid for shall be the actual weight in kilogram of steel reinforcements for R.C. curb, stairlanding, lamp post foundation and electric pedestal to be supplied, fabricated and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.11 Supply and place 3,500 psi concrete for R.C. curb, stairlanding, lamp post foundation and electrical pedestal

The quantity to be paid for shall be the actual volume in cubic meter of 3,500 psi concrete for R.C. curb, stairlanding, lamp post foundation and electrical pedestal to be supplied and placed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.12 Supply and install mooring cleat including accessories

The quantity to be paid for shall be the actual set of mooring cleats including accessories to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 2.13 Supply and install port lighting system

The quantity to be paid for shall be the actual lot of port lighting system to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

BILL NO. 3

CONSTRUCTION OF PASSENGER SHED

Item 3.01 Supply, place and compact gravel bedding for building foundation, ramps, step-up and septic vault

The quantity to be paid for shall be the actual volume in cubic meter of gravel bedding for building foundation, ramps, step-up and septic vault to be supplied, placed and compacted in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.02 Supply, place and compact aggregate subbase course

The quantity to be paid for shall be the actual volume in cubic meter of aggregate subbase course to be supplied, place and compacted in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.03 Supply & install steel reinforcement for footing, columns, wall footing, beams, suspended slab, parapet wall, and concrete bench

The quantity to be paid for shall be the actual weight in kilogram of steel reinforcements for footing, columns, wall footing, beams, suspended slab, parapet wall, and concrete bench to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.04 Supply & place 3,500 psi concrete for footing, columns, wall footing, beams, suspended slab, parapet wall and concrete bench

The quantity to be paid for shall be the actual volume in cubic meter of 3,500 psi concrete for footing, columns, wall footing, beams, suspended slab, parapet wall, and concrete bench to be supplied and placed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full

compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.05 Construct 3,500 psi concrete slab, step-ups and ramps on-fill including reinforcements

The quantity to be paid for shall be the actual area in square meters of 3,500 psi. concrete slab and ramp-up including reinforcements to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.06 Construct 150mm thick CHB wall including steel reinforcements

The quantity to be paid for shall be the actual area in square meter of 150mm thick CHB wall including reinforcements to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.07 Construct 100mm thick CHB wall including steel reinforcements

The quantity to be paid for shall be the actual area in square meters of 100mm thick CHB wall including reinforcements to be constructed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.08 Supply and place septic vault

The quantity to be paid for shall be the actual lot of septic vault to be supply and placed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.09 Supply and place 13mm thick cement plaster finish (2,500 psi concrete)

The quantity to be paid for shall be the actual area in square meters of 13mm thick cement Plaster finish (2,500 psi concrete) to be supplied and placed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.10 Supply and apply elastomeric paint finish (2-coats)

The quantity to be paid for shall be the actual area in square meters of elastomeric paint finish (2-coats) to be supplied and applied in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.11 Supply and apply flat latex paint (2-coats)

The quantity to be paid for shall be the actual area in square meters of flat latex paint (2-coats) to be supplied and applied in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for

furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.12 Supply and apply water proofing

The quantity to be paid for shall be the actual area in square meter of water proofing to be supplied and applied in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.13 Supply and apply quick drying enamel paint finish

The quantity to be paid for shall be the actual area in square meters of quick drying enamel paint finish to be supplied and applied in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.14 Supply and install 0.60m x 0.60m unglazed ceramic floor tile finish

The quantity to be paid for shall be the actual area in square meters of 0.60m x 0.60m unglazed ceramic floor tiles finish to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.15 Supply and install 0.30m x 0.60m ceramic wall tiles

The quantity to be paid for shall be the actual area in square meters of 0.30m x 0.60m ceramic wall tiles to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.16 Supply and install 12mm thick synthetic granite

The quantity to be paid for shall be the actual area in square meters of 12mm thick synthetic granite to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.17 Supply and install 6mm thick marine plywood on 0.40mm thick galvanized steel ceiling suspension system @ 0.40m O.C. (Furring), 0.60m O.C. (Carrying Channel) and 1.20m O.C. B.W. (Suspension Rod) flat enamel paint finish

The quantity to be paid for shall be the actual area in square meters of 6mm thick marine plywood on 0.40mm thick galvanized steel ceiling suspension system at 0.40m O.C. (Furring), 0.60m O.C. (Carrying Channel) and 1.20m O.C. B.W. (Suspension Rod) flat enamel paint finish to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.18 **Supply and install marine plywood painted with quick drying enamel finish flush door with 900mm x 300mm x 2mm thick stainless steel kickplate satined finish and 7.5mm braile signage including 150mm x 50mm door jamb hinges and lever type lockset (1.1m x 2.15m)**

The quantity to be paid for shall be the actual lot of marine plywood painted with quick drying enamel finish flush door with 900mm x 300mm x 2mm thick stainless steel kickplate satined finish and 7.5mm braile signage including 150mm x 50mm door jamb hinges and lever type lockset (1.1m x 2.15m) to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.19 **Supply and install 1.5mm thick aluminum powder coated finish awning window with 8mm thick reflected tempered glass (1.2m x 0.6m)**

The quantity to be paid for shall be the actual lot of 1.5mm thick aluminum powder coated finish awning window with 8mm thick reflected tempered glass (1.2m x 0.6m) to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.20 **Supply and install steel works**

The quantity to be paid for shall be the actual set of steel works to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.21 **Supply and install toilet fixtures and accessories**

The quantity to be paid for shall be the actual lot of toilet fixtures and accessories to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.22 **Supply and install water line pipes and fittings including accessories**

The quantity to be paid for shall be the actual lot of water line pipes and fittings including accessories to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.23 **Supply and install sewerage pipes and fittings including accessories**

The quantity to be paid for shall be the actual lot of sewerage pipes and fittings including accessories to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.24 Supply and install drainage pipes and fittings including accessories

The quantity to be paid for shall be the actual lot of drainage pipes and fittings including accessories to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

Item 3.25 Supply and install passenger shed lighting system

The quantity to be paid for shall be the actual lot of passenger shed lighting system to be supplied and installed in accordance with the plans and specifications and accepted by the Engineer. The contract unit price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the work.

BILL NO. 4

REIMBURSABLE ITEMS

Item 4.01 Secure approval of environmental Compliance Certificate (ECC) Application, Clearance and other necessary documentary requirements

Payment for the aforementioned items will be made upon the successful securement of the approved ECC and, if necessary, the Area Clearance for the Construction of Brgy. Pangapuyan Community Port located at Pangapuyan Island, Zamboanga City. These approvals will be issued by the concerned Department of Environment and Natural Resources (DENR).

The contract's lump sum price will serve as full compensation to the Contractor, who is responsible for all activities related to securing the ECC and Area Clearance, whether carried out in-house or through a commissioned consultant. Claims for payment must be accompanied by invoice and/or other supporting documents (e.g., a notarized certificate of completion). The total amount payable shall not exceed the contract's lump sum price.

FACILITIES TO BE PROVIDED FOR THE ENGINEER & HIS STAFF

RENTAL OF SITE OFFICE AND RESIDENCE FOR THE ENGINEER & STAFF

The Contractor shall provide a temporary site office and residence (rental) with an area of at least 48 square meters for use of the Engineer and his staff for the whole duration of the project.

SECURE APPROVAL OF ENVIRONMENTAL COMPLIANCE CERTIFICATE (ECC) APPLICATION AND AREA CLEARANCE (IF NECESSARY)

The Contractor shall be responsible for facilitating the securement of the Environmental Compliance Certificate (ECC) and, if necessary, the Area Clearance prior to the commencement of the project. This process may be carried out through either in-house resources or a commissioned consultant. The Contractor's responsibilities include, but are not limited to:

A. Preparation of the Environmental Impact Assessment (EIA) Report

The Contractor shall prepare the EIA Report in compliance with all applicable laws, policies, and guidelines set forth by the Department of Environment and Natural Resources (DENR).

B. Submission of Required Documents

The Contractor shall submit all necessary documentation to the appropriate DENR Regional Office and coordinate with other government agencies to acquire the ECC and Area Clearance. This includes obtaining any additional clearances or permits that may be required.

C. Technical Expertise

The Contractor shall provide technical expertise throughout the processing of the ECC and Area Clearance applications until the approvals are granted.

D. Facilitation of Related Activities

The Contractor shall facilitate any other activities or undertakings associated with obtaining the necessary approvals.

During the initial stages of the ECC application, the Contractor may seek assistance from the concerned Port Management Office (PMO) for tasks such as identifying necessary documents and navigating the initial application submission process.

MINIMUM MAJOR EQUIPMENT REQUIREMENTS

1	unit/s	Backhoe (0.40 cu.m., 94.30hp, minimum), owned
1	unit	Clamshell, owned
1	unit	Concrete Cutter, owned
2	unit	Concrete Mixer (1 bagger, minimum), owned
1	unit	Concrete Bucket, owned
1	unit	Concrete Screeder, owned
2	unit	Concrete Vibrator (3.5 hp, minimum), owned
1	unit	Crawler Crane (30T, minimum), owned
1	unit	Dump Truck (10T net capacity, minimum), owned
1	unit	Bar Bender (electric, 25mm dia min.), owned
1	unit	Bar Cutter (electric, 25mm dia min.), owned
1	unit	Payloader (1.06 cu.m., 80 hp, minimum), owned
1	unit	Plate Compactor (5 hp, minimum), owned
1	unit	Road Grader (125 hp, minimum), owned
1	unit	Road Roller (10T, vibratory, minimum), owned
1	unit	Water Truck with pump (1,000 gal., minimum), owned
1	unit	Welding Machine (400 amp., minimum), owned
1	unit	Cargo Truck (2T, minimum) , owned

CONSTRUCTION SAFETY AND HEALTH REQUIREMENT

The Contractor shall implement the construction safety and health program in accordance with the applicable provisions of the Occupational Safety and Health Standards (OSHS) of the Department of Labor and Employment (DOLE).

The Contractor, subject to the approval of the Engineer shall provide and maintain throughout the duration of the contract a medical room with at least 15 square meters together with all necessary supplies to be sited in the Contractor's main area.

The Contractor shall provide the following minimum requirements:

L A B O R

1	no.	Safety Engineer / Officer
1	no.	Nurse / Health Officer

EQUIPMENT / MATERIALS

Personnel Protective Equipment

35	pcs.	Hard Hats
35	pair	Gloves (rubberized)
35	pair	Safety Glasses/Goggles (clear)
70	pcs.	Long sleeve T-shirt
35	pair	Safety Shoes

Safety Devices

1	lot	Barricades
1	lot	Warning signs (Signages)
2	unit/s	Fire extinguisher (10kg)

Medical and First Aid System - Thirteen (13) mos.

NOTE:

The Contractor shall provide the above-cited minimum construction safety and health requirements or as required by the Engineer.

PPA MEMORANDUM CIRCULAR
No 02
Series of 2016
Attachment

REVISED SCHEDULE OF MINIMUM TEST REQUIREMENTS OF CONSTRUCTION MATERIALS FOR PPA INFRASTRUCTURE PROJECTS

Materials/Items of Work	*Required Tests*	*Minimum Incremental Frequency of Tests*
I. Construction of Pier/Wharf, Platform and Ramp		
Structural Concrete (SC)		
A Portland Cement	Quality Test	For every 2,000 bags (40kg) or fraction thereof
B Fine Aggregate	Quality Test for Grading, Elutriation (wash), Bulk Specific Gravity, Absorption, Mortar Strength, Soundness, Organic Impurities, Unit Weight, % Clay Lumps and Shale	For every 1,500 cubic meter or fraction thereof
C Coarse Aggregate	Quality Test for Grading, Bulk Specific Gravity, Absorption and Abrasion	For every 1,500 cubic meter or fraction thereof
D Water	Certificate from the Engineer or Quality Test for Density and Chloride Content	One per source
E Steel Bars	Mill Certificate and Quality Test for Chemical Composition and Mechanical Properties	For every 10,000 kg or fraction thereof
F Concrete	Compressive Strength on cylinder samples	1 set consisting of 3 concrete cylinder samples shall be taken from each day's pouring and to represent not more than 75 cu m of concrete or fraction thereof
	Slump Test	For every mix
G Admixture and Concrete Curing Materials	Quality Test	One per shipment
Piling (P)		
A Concrete Piles	Fabrication Report	One per fabrication
1 Concrete	Same test as for SC (F)	Same frequency as SC (F)
2 Steel Bars	Same test as for SC (E)	Same frequency as SC (E)
3 High Tension Strand	Test for Chemical Composition and Mechanical Properties	For every 20000kg or fraction thereof

Materials/Items of Work	Required Tests	Minimum Incremental Frequency of Tests
4 Coarse Aggregates	Same Test as for SC (C)	Same frequency as SC (C)
5 Fine Aggregates	Same Test as for SC (B)	Same frequency as SC (B)
B Steel Pipe Piles	Fabrication Report, Mill Certificate and Quality Test for Chemical and Mechanical properties	One per fabrication
1 Steel	Chemical Composition (refer below)	
	- Under 14" (355 60mm) Outside Diameter	2 from 200 pipe of fraction thereof
	- 14" to 36" (355 6 to 914mm) Outside Dia	2 from 100 pipe or fraction thereof
	- Over 36" (914mm) Outside Diameter	2 from 3000ft (914m) or fraction thereof
	Mechanical/Tensile	One (1) tension test shall be made on one length or fraction thereof of each size, or one piece of skelp representing each lot of 200 lengths or fraction thereof of each size
2 Polyurethane Coating	Mill Certificate and Quality Test	One per fabrication
3 Concrete	Same test as for SC (F)	Same frequency as SC (F)
4 Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)
5 Coarse Aggregate	Same test as for SC (C)	Same frequency as SC (C)
6 Steel Bars	Same Test as SC (E)	Same frequency as SC (E)
7 Water	Same Test as SC (D)	Same frequency as SC (D)
Rubber Dock Fenders (RDF)	Physical Test	All units
	Performance Test for Energy Absorption and Reaction Force	All units
Accessories		
Washer and Fixing Bolt, Anchor Bolt	Physical Test	All units
	Quality Test for Chemical Composition and Mechanical Properties	One per fabrication

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
Mooring Bollard (MB) and Accessories (Hexagon Nuts, Plain Washer, Anchor Ring and Anchor Bolt)	Physical Test Quality Test for Chemical Composition and Mechanical Properties	All Units One per fabrication
II. Construction of Back-Up Area, Causeway and Pavement		
Sheet Piling (SP)		
A Concrete Sheet Piles		
1 Concrete	Same test as for SC (F)	Same frequency as SC (F)
2 Steel Bars	Same test as for SC (E)	Same frequency as SC (E)
3 High Tension Strands	Same test as for P (A 3)	Same frequency as P (A 3)
4 Fine Aggregates	Same test as for SC (B)	Same frequency as SC (B)
5 Coase Aggregates	Same Test as for SC (C)	Same frequency as SC (C)
B Steel Pipe Piles		
1 Steel	Same test as for P (B1)	Same frequency as P (B1)
2 Concrete	Same test as for SC (F)	Same frequency as SC (F)
3 Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)
4 Steel Bars	Same test as for SC (E)	Same frequency as SC (E)

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
Rocks	Test for Apparent Specific Gravity and Abrasion	For every 1,500 cubic meter or fraction thereof
Geotextile Filter	Physical and Mechanical Test	One per batch
	Mill Certificate	One per batch
Sand and Gravel Fill	Quality Test for Organic Impurities and Grading	For every 1,500 cubic meter or fraction thereof
Selected Fill	Quality Test for Grading, Plasticity and Laboratory Compaction Test	For every 1,500 cubic meter or fraction thereof
	Laboratory California Bearing Ratio (CBR)	For every 2,500 cubic meter or fraction thereof
	Field Density Test	For every layer of 150mm of compacted depth at least one group of three In-situ density test for every 500 sq m or fraction thereof
Aggregate Base Course	Quality Test for Grading and Plasticity	For every 300 cubic meter or fraction thereof
	Quality Test for Grading, Plasticity, Abrasion and Laboratory Compaction Test	For every 1,500 cubic meter or fraction thereof
	Laboratory California Bearing Ratio (CBR)	Same frequency as Selected Fill
	Field Density Test	Same frequency as Selected Fill
Portland Cement Concrete Pavement (PCCP)		
A Portland Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)
C Coarse Aggregate	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Steel Bars (Dowels)	Same test as for SC (E)	Same frequency as SC (E)
F Joint Filler	Quality Test	One (1) per shipment

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
G Admixture and Concrete Curing Material	Same test as for SC (G)	Same frequency as SC (G)
H Concrete	Same test as for SC (F)	Same frequency as SC (F)
	Flexural Test	3 beam samples for every 330 sq m or fraction thereof
I Completed Pavement	Core Test	1 set (3 specimen) for every 2,500 sq m and fraction thereof
Interlocking Concrete Blocks		
A Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)
C Coarse Aggregate	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Admixture & Concrete Curing Materials	Same test as for SC (G)	Same frequency as SC (G)
F Completed Blocks	Physical Test and Compressive Strength	6 blocks per day of fabrication
Cement Treated Base Course (CTB)		
A Portland Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine & Coarse Aggregates	Quality Test for Grading, Abrasion and Soundness	For every 1,500 cubic meter or fraction thereof
C Water	Same test as for SC (D)	Same frequency as SC (D)
D Completed CTB	Field Density Test	For every layer of 150mm of compacted depth at least one group of three In-situ density test every 500 sq m or fraction thereof
Retaining Wall/Coping Wall/RC Curb/RC Ditch/Shear Key/Concrete Blocks\Lean Concrete		
A Portland Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregate	Same test as for SC (B)	Same frequency as SC (B)

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
C Coarse Aggregates	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Steel Bars	Same test as for SC (E)	Same frequency as SC (E)
F Admixture and Concrete Curing	Same test as for SC (G)	Same frequency as SC (G)
G Concrete	Same test as for SC (F)	Same frequency as SC (F)
Tie Rod A Steel	Same test as for SC (E)	One per batch
B Assembly	Performance Test (Tension)	One per batch
Tie Bars and Dowels	Same test as for SC (E)	For every 10,000 kg or fraction thereof per Tie bars and Dowels
Pipe Culverts and Storm Drains		
A Pipes	Test for Strength, Absorption and Physical	For every 50 pieces
B Mortar or Joint	Same Test as for SC (A,B and D) Alternative Test Same test as for SC (F) and Inspection Report	For every 25 pieces
Concrete Hollow Blocks		
A Portland Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregates	Same test as for SC (B)	Same frequency as SC (B)
C Water	Same test as for SC (D)	Same frequency as SC (C)
D Concrete	Same test as for SC (F)	Same frequency as SC (F)
E Completed CHB	Quality Test	One for every 500 pieces or fraction thereof
Construction Joints (CJ)		
A Angle Bars	Test for Physical and Mechanical Properties	One per batch
B Steel Bars	Same test as for SC (E)	One per batch
C Zinc (Hot Dip Galvanizing) Coatings	Physical Test for Appearance, Stripping, Weighing, Adherence and Adhesion	All units
	Coating Thickness Magnetic Thickness Measurement	1 set (3 specimen) for every 100,000 sq mm or fraction thereof

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
Sacked Concrete		
A Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregates	Same test as for SC (B)	Same frequency as SC (B)
C Coarse Aggregates	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Concrete	Same test as for SC (F)	Same frequency as SC (F)
F Sack (jute)	Physical Test	One for every 50 pieces
Rubble Concrete		
A Cement	Same test as for SC (A)	Same frequency as SC (A)
B Fine Aggregates	Same test as for SC (B)	Same frequency as SC (B)
C Coarse Aggregates	Same test as for SC (C)	Same frequency as SC (C)
D Water	Same test as for SC (D)	Same frequency as SC (D)
E Concrete	Same test as for SC (F)	Same frequency as SC (F)
F Rocks	Same test as for ROCKS	Same frequency as ROCKS
Earthworks		
A Sub-grade preparation	Grading Test Plasticity Test (LL,PL,PI) Laboratory Compaction Test	For every 1,500 cubic meter or fraction thereof
	Density Test	For every layer of 150mm of compacted depth at least one group of three In-situ density test every 500 sq m or fraction thereof
B Structure Excavation	If excavated materials shall be used as Backfill Grading Test Plasticity Test (LL,PL,PI) Laboratory Compaction Test	For every 1,500 cubic meter or fraction thereof
	Density Test	For every layer of 150mm of compacted depth at least one group of three In-situ density test every 500 sq m or fraction thereof

Materials/Items of Work	***Required Tests***	***Minimum Incremental Frequency of Tests***
III Port Operations Building/Passenger Terminal Building/Transit Shed/Warehouse		
STRUCTURAL WORKS	Refer to Structural Concrete (SC) and Piling Works (P)	
ARCHITECTURAL WORKS		
Ceramic – Filled Liquid Membrane / Water Proofing, Hydrophobic Poreblocking Ingredients with Superplasticizer	Physical Property, Mechanical and Chemical Property, Leak Test / Flood Test	One per shipment
Paint	Quality Test	One 4-L can for every 100 cans or fraction thereof
Ceramic Tile	Inspection and Evaluation Report from the Engineer	One per shipment
Stainless Steel	Inspection and Evaluation Report from the Engineer	One per shipment
Roofing Materials	Inspection and Evaluation Report from the Engineer	One per shipment
Ceiling Materials	Inspection and Evaluation Report from the Engineer	One per shipment
ELECTRICAL AND MECHANICAL WORKS		
Wires / Cables	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per shipment
Electrical Devices	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per shipment
Fire Alarm System	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Wiring Devices	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per shipment

Materials/Items of Work	Required Tests	Minimum Incremental Frequency of Tests
Protective Devices	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per shipment
Telephone System	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
CCTV System	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
CATV System	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Background Music and Paging System	Inspection and Evaluation Report from the Engineer, Testing and Commissioning	One per item
Air Conditioning Units & Ventilation	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Conduit Pipes	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Lighting Fixtures	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
PLUMBING WORKS		
Pipes	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item

PPA MEMORANDUM CIRCULAR
No 02
Series of 2016
Attachment

Materials/Items of Work	Required Tests	Minimum Incremental Frequency of Tests
Fixtures	Inspection and Evaluation Report from the Engineer Testing and Commissioning	One per item
Pipe Culverts	Compression Strength Inspection and Evaluation Report from the Engineer	For every size not more than 25 pipes cast in the field
IV Miscellaneous Materials Fencing A Barbed Wire, Cyclone Wire Mesh, Chain Link B Concrete Post	Physical Test (Dimensions and Coatings) Refer to Superstructure (SC)	One per Batch Refer to Superstructure (SC)
Lamp Post A Structural Steel B Zinc (Hot Dip Galvanizing) Coatings	Physical Test (Dimensions) Same test as for SC (E) Same test as for CJ (C)	All units One per batch
Drainage Steel Grating	Same test as for SC (E) Inspection Report	One (1) batch
Metal Pipe (Cast Iron Galvanized, etc)	Physical Test (Dimensions and Coatings)	1 per delivery
Welding Works	Destructive and Non Destructive Test	One (1) per lot

NOTES
1. **Testing of RDF shall be performed only by an independent Testing Laboratory duly accredited by BRS, DOST and PPA**
2. **Testing of other materials shall be performed only by an independent Testing Laboratory duly accredited by BRS and PPA.**
3. **All other issuances which are otherwise inconsistent herewith are hereby revoked or otherwise amended.**

Approved

RAUL T. SANTOS
Officer-In-Charge,
Office of the General Manager

SECTION IX

CHECKLIST OF TECHNICAL AND FINANCIAL DOCUMENTS

Checklist of Technical and Financial Documents

I. TECHNICAL COMPONENT ENVELOPE

Class "A" Documents

Legal Documents

☐ (a) Valid PhilGEPS Registration Certificate (Platinum Membership) (all pages)

Technical Documents

☐ (b) Statement of the prospective bidder of all its ongoing government and private contracts, including contracts awarded but not yet started, if any, whether similar or not similar in nature and complexity to the contract to be bid; **and**

☐ (c) Statement of the bidder's Single Largest Completed Contract (SLCC) similar to the contract to be bid, except under conditions provided under the rules; **and**

☐ (d) Special PCAB License in case of Joint Ventures;
and registration for the type and cost of the contract to be bid; **and**

☐ (e) Original copy of Bid Security. If in the form of a Surety Bond, submit also a certification issued by the Insurance Commission;
or
Original copy of Notarized Bid Securing Declaration; **and**

(f) Project Requirements, which shall include the following:

☐ a. Organizational chart for the contract to be bid;

☐ b. List of contractor's key personnel (*e.g.*, Project Manager, Project Engineers, Materials Engineers, and Foremen), to be assigned to the contract to be bid, with their complete qualification and experience data;

☐ c. List of contractor's major equipment units, which are owned, leased, and/or under purchase agreements, supported by proof of ownership or certification of availability of equipment from the equipment lessor/vendor for the duration of the project, as the case may be; **and**

☐ (g) Original duly signed Omnibus Sworn Statement (OSS);
and if applicable, Original Notarized Secretary's Certificate in case of a corporation, partnership, or cooperative; or Original Special Power of Attorney of all members of the joint venture giving full power and authority to its officer to sign the OSS and do acts to represent the Bidder.

Financial Documents

☐ (h) The prospective bidder's computation of Net Financial Contracting Capacity (NFCC).

Class "B" Documents

☐ (i) If applicable, duly signed joint venture agreement (JVA) in accordance with RA No. 4566 and its IRR in case the joint venture is already in existence;
or
duly notarized statements from all the potential joint venture partners stating that they will enter into and abide by the provisions of the JVA in the instance that the bid is successful.

II. FINANCIAL COMPONENT ENVELOPE

☐ (j) Original of duly signed and accomplished Financial Bid Form; **and**

Other documentary requirements under RA No. 9184

☐ (k) Original of duly signed Bid Prices in the Bill of Quantities; **and**

☐ (l) Duly accomplished Detailed Estimates Form, including a summary sheet indicating the unit prices of construction materials, labor rates, and equipment rentals used in coming up with the Bid; **and**

☐ (m) Cash Flow by Quarter.

SECTION X

BIDDING FORM

Bid Form for the Procurement of Infrastructure Projects

[shall be submitted with the Bid]

BID FORM

Date : _____
Project Identification No. : _____

To: **Philippine Ports Authority**
PPA Building, Bonifacio Drive,
South Harbor, Port Area, Manila

Having examined the Philippine Bidding Documents (PBDs) including the Supplemental or Bid Bulletin Numbers _____, the receipt of which is hereby duly acknowledged, we, the undersigned, declare that:

a. We have no reservation to the PBDs, including the Supplemental or Bid Bulletins, for the Procurement Project: **Construction of Brgy. Pangapuyan Community Port, Pangapuyan Island, Zamboanga City;**

b. We offer to execute the Works for this Contract in accordance with the PBDs;

c. The total price of our Bid in words and figures, excluding any discounts offered below is: _____;

d. The discounts offered and the methodology for their application are: _____;

e. The total bid price includes the cost of all taxes, such as, but not limited to: *[specify the applicable taxes, e.g. (i) value added tax (VAT), (ii) income tax, (iii) local taxes, and (iv) other fiscal levies and duties],* which are itemized herein and reflected in the detailed estimates,

f. Our Bid shall be valid within the period stated in the PBDs, and it shall remain binding upon us at any time before the expiration of that period;

g. If our Bid is accepted, we commit to obtain a Performance Security in the amount of _____ percent of the Contract Price for the due performance of the Contract, or a Performance Securing Declaration in lieu of the the allowable forms of Performance Security, subject to the terms and conditions of issued GPPB guidelines[1] for this purpose;

h. We are not participating, as Bidders, in more than one Bid in this bidding process, other than alternative offers in accordance with the Bidding Documents;

i. We understand that this Bid, together with your written acceptance thereof

[1] currently based on GPPB Resolution No. 09-2020

included in your notification of award, shall constitute a binding contract between us, until a formal Contract is prepared and executed; and

j. We understand that you are not bound to accept the Lowest Calculated Bid or any other Bid that you may receive.

k. We likewise certify/confirm that the undersigned, is the duly authorized representative of the bidder, and granted full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for the **Construction of Brgy. Pangapuyan Community Port, Pangapuyan Island, Zamboanga City** of the **Philippine Ports Authority**.

l. We acknowledge that failure to sign each and every page of this Bid Form, including the Bill of Quantities, shall be a ground for the rejection of our bid.

Name: _____

Legal Capacity: _____

Signature: _____

Duly authorized to sign the Bid for and behalf of: _____

Date: _____

STATEMENT OF THE BIDDER'S ALL ONGOING GOVERNMENT AND PRIVATE CONTRACTS, INCLUDING CONTRACTS AWARDED BUT NOT YET STARTED

I hereby declare that all ongoing contracts, including awarded contracts yet to be started coinciding with the contract to be bid are listed below:

Name of outstanding Contracts 1]	Owner's Name and Address	Scope of Work 2]	Contractor's Role and Percentage of Participation 3]	Total Contract Amount or Value 4]	Date of Contract and NOA 5]	Value of Outstanding Works 6]	Accomplishment (in percentage, %) 7]		Contract Duration 8]	
							Planned	Actual	Start of Project	Estimated Completion Date
A) Government Contracts i. On-going ii. Awarded but not yet started										
B) Private Contracts i. On-going ii. Awarded but not yet started										

NOTE:

1] As appearing in the contract executed by the parties.
2] With special reference to the Scope of Works of the Project as described/enumerated in the Contract.
3] Indicate the percentage of participation and whether as Sole Contractor, Sub-Contractor or Member in a Joint Venture / Consortium.
4] Indicate the FOREX used if Contract Value is expressed in a currency other than the Philippine Peso.
5] As appearing in the Contract and Notice of Award (NOA).
6] Amount or value of all outstanding or uncompleted portions of the projects under ongoing contracts, including awarded contracts yet to be started coinciding with the contract to be bid.
7] Percentage of Accomplishment as of the preceding month which should not be earlier than two (2) months from the date of bid submission.
8] As appearing in the Notice to Proceed and Contract.

This Statement shall be supported by:

a) Notice of Award
b) Notice to Proceed and Contract

Name of Firm (Signatory's Legal Capacity)	Name of Bidder/Authorized Representative	Date

Revised: September 2021

STATEMENT OF THE BIDDER'S SINGLE LARGEST COMPLETED CONTRACT (SLCC) SIMILAR TO THE CONTRACT TO BE BID

Name of the completed Contract 1]	Owner's Name and Address	Scope of Work 2]	Contractor's Role and Percentage of Participation 3]	Total Contract Value At 4]			Date of Award 5]	Contract Duration 6]	
				Award	Completion	Escalated Value to Present Prices		Start	Completed

NOTE :

1] As appearing in the contract executed by the parties.
2] With special reference to the Scope of Works of the Project as described/enumerated in the Contract.
3] Indicate the percentage of participation and whether as Sole Contractor, Sub-Contractor or Member in a Joint Venture / Consortium.
4] Indicate the FOREX used if Contract Value is expressed in a currency other than the Philippine Peso. Attached the computation for the escalated contract value.
5] As appearing in the Notice of Award.
6] As appearing in the Notice to proceed and Certificate of Completion.

A. The bidder must have an experience of having completed a SLCC that is similar to the contract to be bid equivalent to at least fifty percent (50%) of the ABC, adjusted if necessary, by the Bidder to current prices using the PSA consumer price indices. A contract is considered to be "similar" to the contract to be bid if it has the same Major Categories of Work as stated in the Bid Data Sheet (BDS).
B. This Statement shall be supported by:
   a. Notice of Award, Notice to Proceed and Contract.
   b. Project Owner's Certificate of Final Acceptance issued by the owner and/ or Constructors Performance Evaluation System (CPES) Final Rating, which must be at least Satisfactory. The said Certificate of Acceptance shall contain the following: 1) Name of project owner that issued the certificate, 2) Name of Contractor/ Constructor, 3) Name of Contract, and 4) Contract Duration.
   c. Recapitulation or Final Bill of Quantities.

Name of Firm	Name of Bidder/Authorized Representative (Signatory's Legal Capacity)	Date

Revised: September 2021

STATEMENT OF THE BIDDER'S EXPERIENCE ON MAJOR CATEGORIES OF WORK OF THE SLCC INCLUDING OTHER COMPLETED CONTRACTS SIMILAR TO THE CONTRACT TO BE BID

Major Categories of Work 1]	Unit of Measure 1]	Quantity 1]	SLCC similar to the contract to be bid 2]	Other completed contracts similar to the contract to be bid 2]			Unit of Measure 2]	Quantity 2]
			Name of the contract	Name of the contract	Name of the contract	Name of the contract		
1. Rockworks (50-500 kg/pc.)	cu.m.	2,992						
2. Reinforced Concrete Works	cu.m.	72						
3. Construction of Portland Cement Concrete Pavement	sq.m.	381						
4. Fill materials	cu.m.	1,803						
5. Construction of Building	sq.m	70						

NOTE:
1] As stated in the Bid Data Sheet.
2] As appearing in the Recapitulation and/ or Final Bill of Quantities.
This statement shall be supported by:

a. Notice of Award, Notice to Proceed and Contract.
b. Project Owner's Certificate of Final Acceptance issued by the owner and/ or Constructors Performance Evaluation System (CPES) Final Rating, of at least satisfactory. The said Certificate of Acceptance shall contain the following: 1) Name of project owner that issued the certificate, 2) Name of Contractor/Constructor, 3) Name of Contract, and 4) Contract Duration.
c. Recapitulation and/ or Final Bill of Quantities.

Name of Firm	Name of Bidder/Authorized Representative Signatory's Legal Capacity	Date

Revised: September 2021

FINANCIAL DATA

A. The prospective bidder's audited Financial Statements, showing, among others, the prospective bidder's total and current assets and liabilities, stamped "RECEIVED" by the Bureau of Internal Revenue (BIR), or its duly accredited and authorized institutions, for the preceding calendar year which should not be earlier than two (2) years from the date of bid submission.

	Year
1. Total Assets	
2. Current Assets	
3. Total Liabilities	
4. Current Liabilities	
5. Net worth (1-3)	
6. Net Working Capital (2-4)	

B. The computation of the bidders Net Financial Contracting Capacity (NFCC) must be at least equal to the ABC to be bid, as follows:

NFCC = [(Current assets minus current liabilities) (15)] minus the value of all outstanding or uncompleted portions of the projects under ongoing contracts, including awarded contracts yet to be started coinciding with the contract to be bid.

NFCC = _____

Attached herewith are certified true copies of the audited financial statements stamped received by the BIR or BIR authorized collecting agent for the latest/immediately preceding calendar year.

_____
Name of Firm/Applicant

_____
Authorized Signing Official

Date:_____

NOTES:

If Partnership or Joint Venture, each Partner or Member Firm of Joint venture shall submit separate financial statements.

STATEMENT OF THE BIDDER'S KEY PERSONNEL PLEDGED FOR THE CONTRACT TO BE BID

I hereby declare that the following key personnel are qualified and available for the duration of the contract to be bid:

Position of Key Personnel 1]	Name	No. of Key Personnel	Similar Experience in the Position (Years) 2]	Total Experience in the Position (Years)	Attachment(s)	Annex(es)
Project Manager					PRC License (CE Preferred) Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Project Engineer					PRC License (CE Preferred) Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Materials Engineer I					PRC License Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Construction Safety and Health Officer					PRC License (CE Preferred) Submit Valid and Renewed DPWH Certificate of Accreditation Submit Accreditation Identification Card as Materials Engineer Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Foreman					Certificate of Safety and Health Construction Related Course issued by DOLE Accredited Trainings Complete Qualification and Experience Data Certificate of Commitment	Annex "_"
Other Position(s)					Complete Qualification and Experience Data Certificate of Commitment	Annex "_"

NOTE: 1] As stated in the Bid Data Sheet
2] The number of years of experience of the key personnel shall be as indicated in the qualification and experience data or curriculum vitae.

Minimum qualification requirements: The key personnel must have a work experience that is similar in nature and complexity to the contract to be bid.

Project Manager – Five (5) years
Project Engineer – Three (3) years
Construction Safety and Health Officer – One (1) year
Materials Engineer – One (1) year
Materials Engineer I – for projects costing up to 100M
Foreman - Five (5) years

_____
Name of Firm

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

_____
Date

Revised: September 2021

STATEMENT OF THE BIDDER'S EQUIPMENT PLEDGED FOR THE CONTRACT TO BE BID

I hereby declare that the following equipment are in good operating condition and available for the duration of the contract to be bid:

DESCRIPTION (Type, Model, Make)	No. of Unit(s)	Capacity/ Output 1]	Owned, Leased, and/or under purchased agreement 2]	Proof of Ownership/ Leased/ Under Purchase Agreement (Mark as Annex "A.....Z") 3]	OTHER INFORMATION (As Applicable)				
					Manufacturer	Engine Serial No.	Chassis No./ Name of Vessel	Location	Status

NOTE:

1] The unit of capacity of the pledged equipment shall be as indicated in the Proof of Ownership, i.e. GW (for crane barge), DWT (for deck barge and hopper barge), Ton (for crane, road roller and drop hammer), kg.-m/blow (for diesel hammer), Ton. (for dump truck), hp (for tugboat, road grader, bulldozer and concrete vibrator), cfm (for compressor), gal (for water truck with pump), amp (for welding machine), bagger (for concrete mixer). If the capacity of the pledged equipment is not indicated in the Proof of Ownership/Lease Contract/Purchased Agreement, submit other proof of capacity such as specifications, brochures or other verifiable printouts indicating the model name, model number and other details of the equipment.

2] Indicate if the pledged equipment are owned, leased or under purchase agreement.

3] If the pledged equipment is owned, it should be in the name of the bidder. Submit proof of ownership, i.e. deed of sale, sales invoice, official receipt; For owned Water Truck, Dump Truck, Cargo Truck and Transit Mixer submit LTO Certificate of Registration and valid Official Receipt; For owned barge/tugboat, submit Marina Certificate of Ownership and valid Cargo Ship Safety Certificate.

If the pledged equipment is leased/under purchase agreement, submit the following:

For equipment under lease agreement:

a. certification of availability of equipment from the equipment lessor for the duration of the project
b. duly Notarized copy of lease contract
c. For Water Truck, Dump Truck, Cargo Truck and Transit Mixer submit LTO Certificate of Registration and valid Official Receipt

For equipment under purchase agreement:

a. certification of availability of equipment from the equipment vendor
b. duly Notarized copy of purchase agreement
c. For Water Truck, Dump Truck and Transit Mixer submit LTO Certificate of Registration and valid Official Receipt or copy of conduction sticker, whichever is applicable.

If the pledged barge/tugboat is leased/under purchase agreement, submit certification of availability of barge/tugboat from the equipment lessor/vendor for the duration of the project, and duly Notarized copy of lease contract/purchased agreement together with a copy of the Marina Certificate of Ownership and valid Cargo Ship Safety Certificate.

The Minimum Major Equipment Requirements are listed in Section 8, Annex 3.

_____
Name of Firm

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

_____
Date

Revised: April 2025

Omnibus Sworn Statement for Sole Proprietorship

[shall be submitted with the Bid]

REPUBLIC OF THE PHILIPPINES)
CITY/MUNICIPALITY OF _____) S.S.

AFFIDAVIT

I, _____, of legal age, [Civil Status], [Nationality], and residing at _____, after having been duly sworn in accordance with law, do hereby depose and state that:

1. I am the sole proprietor or authorized representative of _____ with office address at _____;

2. As the owner and sole proprietor, or authorized representative of _____, I have full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for **Construction of Brgy. Pangapuyan Community Port, Pangapuyan Island, Zamboanga City** as shown in the attached duly notarized Special Power of Attorney;

3. [Name of Bidder] is not "blacklisted" or barred from bidding by the Government of the Philippines or any of its agencies, offices, corporations, or Local Government Units, foreign government/foreign or international financing institution whose blacklisting rules have been recognized by the Government Procurement Policy Board, **by itself or by relation, membership, association, affiliation, or controlling interest with another blacklisted person or entity as defined and provided for in the Uniform Guidelines on Blacklisting;**

4. Each of the documents submitted in satisfaction of the bidding requirements is an authentic copy of the original, complete, and all statements and information provided therein are true and correct;

5. [Name of Bidder] is authorizing the Head of the Procuring Entity or its duly authorized representative(s) to verify all the documents submitted;

6. The owner or sole proprietor is not related to the Head of the Procuring Entity, Procurement Agent if engaged, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

7. *[Name of Bidder]* complies with existing labor laws and standards; and

8. *[Name of Bidder]* is aware of and has undertaken the responsibilities as a Bidder in compliance with the Philippine Bidding Documents, which includes:

   a. Carefully examining all of the Bidding Documents;
   b. Acknowledging all conditions, local or otherwise, affecting the implementation of the Contract;
   c. Making an estimate of the facilities available and needed for the contract to be bid, if any; and
   d. Inquiring or securing Supplemental/Bid Bulletin(s) issued for the *[Name of the Project]*.

9. *[Name of Bidder]* did not give or pay directly or indirectly, any commission, amount, fee, or any form of consideration, pecuniary or otherwise, to any person or official, personnel or representative of the government in relation to any procurement project or activity.

10. **In case advance payment was made or given, failure to perform or deliver any of the obligations and undertakings in the contract shall be sufficient grounds to constitute criminal liability for Swindling (Estafa) or the commission of fraud with unfaithfulness or abuse of confidence through misappropriating or converting any payment received by a person or entity under an obligation involving the duty to deliver certain goods or services, to the prejudice of the public and the government of the Philippines pursuant to Article 315 of Act No. 3815 s. 1930, as amended, or the Revised Penal Code.**

IN WITNESS WHEREOF, I have hereunto set my hand this __ day of ___, 20__ at _____, Philippines.

_____
Name of Bidder/ Authorized Representative
(Signatory's Legal Capacity)
AFFIANT

[Jurat]
[Format shall be based on the latest Rules on Notarial Practice]

Omnibus Sworn Statement for Partnership or Cooperative

[shall be submitted with the Bid]

REPUBLIC OF THE PHILIPPINES)
CITY/MUNICIPALITY OF _____) S.S.

AFFIDAVIT

I, _____, of legal age, [Civil Status], [Nationality], and residing at _____, after having been duly sworn in accordance with law, do hereby depose and state that:

1. I am the duly authorized and designated representative of _____ with office address at _____;

2. I am granted full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for **Construction of Brgy. Pangapuyan Community Port, Pangapuyan Island, Zamboanga City** of the **Philippine Ports Authority**, as shown in the attached [state title of attached document showing proof of authorization (e.g., duly notarized Secretary's Certificate, Board/Partnership Resolution, or Special Power of Attorney, whichever is applicable;)];

3. [Name of Bidder] is not "blacklisted" or barred from bidding by the Government of the Philippines or any of its agencies, offices, corporations, or Local Government Units, foreign government/foreign or international financing institution whose blacklisting rules have been recognized by the Government Procurement Policy Board, **by itself or by relation, membership, association, affiliation, or controlling interest with another blacklisted person or entity as defined and provided for in the Uniform Guidelines on Blacklisting;**

4. Each of the documents submitted in satisfaction of the bidding requirements is an authentic copy of the original, complete, and all statements and information provided therein are true and correct;

5. [Name of Bidder] is authorizing the Head of the Procuring Entity or its duly authorized representative(s) to verify all the documents submitted;

6. None of the officers and members of *[Name of Bidder]* is related to the Head of the Procuring Entity, Procurement Agent if engaged, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

7. *[Name of Bidder]* complies with existing labor laws and standards; and

8. *[Name of Bidder]* is aware of and has undertaken the responsibilities as a Bidder in compliance with the Philippine Bidding Documents, which includes:

   a. Carefully examining all of the Bidding Documents;
   b. Acknowledging all conditions, local or otherwise, affecting the implementation of the Contract;
   c. Making an estimate of the facilities available and needed for the contract to be bid, if any; and
   d. Inquiring or securing Supplemental/Bid Bulletin(s) issued for the *[Name of the Project]*.

9. *[Name of Bidder]* did not give or pay directly or indirectly, any commission, amount, fee, or any form of consideration, pecuniary or otherwise, to any person or official, personnel or representative of the government in relation to any procurement project or activity.

10. **In case advance payment was made or given, failure to perform or deliver any of the obligations and undertakings in the contract shall be sufficient grounds to constitute criminal liability for Swindling (Estafa) or the commission of fraud with unfaithfulness or abuse of confidence through misappropriating or converting any payment received by a person or entity under an obligation involving the duty to deliver certain goods or services, to the prejudice of the public and the government of the Philippines pursuant to Article 315 of Act No. 3815 s. 1930, as amended, or the Revised Penal Code.**

IN WITNESS WHEREOF, I have hereunto set my hand this __ day of ___, 20__ at _____, Philippines.

_____
Name of Bidder/ Authorized Representative
(Signatory's Legal Capacity)
AFFIANT

[Jurat]
[Format shall be based on the latest Rules on Notarial Practice]

Omnibus Sworn Statement for Corporation or Joint Venture

[shall be submitted with the Bid]

REPUBLIC OF THE PHILIPPINES)
CITY/MUNICIPALITY OF _____) S.S.

AFFIDAVIT

I, _____, of legal age, [Civil Status], [Nationality], and residing at _____, after having been duly sworn in accordance with law, do hereby depose and state that:

1. I am the duly authorized and designated representative of _____ with office address at _____;

2. I am granted full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for **Construction of Brgy. Pangapuyan Community Port, Pangapuyan Island, Zamboanga City** as shown in the attached [state title of attached document showing proof of authorization (e.g., duly notarized Secretary's Certificate, Board/Partnership Resolution, or Special Power of Attorney, whichever is applicable;)];

3. [Name of Bidder] is not "blacklisted" or barred from bidding by the Government of the Philippines or any of its agencies, offices, corporations, or Local Government Units, foreign government/foreign or international financing institution whose blacklisting rules have been recognized by the Government Procurement Policy Board, **by itself or by relation, membership, association, affiliation, or controlling interest with another blacklisted person or entity as defined and provided for in the Uniform Guidelines on Blacklisting;**

4. Each of the documents submitted in satisfaction of the bidding requirements is an authentic copy of the original, complete, and all statements and information provided therein are true and correct;

5. [Name of Bidder] is authorizing the Head of the Procuring Entity or its duly authorized representative(s) to verify all the documents submitted;

6. None of the officers, directors, and controlling stockholders of *[Name of Bidder]* is related to the Head of the Procuring Entity, Procurement Agent if engaged, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

7. *[Name of Bidder]* complies with existing labor laws and standards; and

8. *[Name of Bidder]* is aware of and has undertaken the responsibilities as a Bidder in compliance with the Philippine Bidding Documents, which includes:

   a. Carefully examining all of the Bidding Documents;
   b. Acknowledging all conditions, local or otherwise, affecting the implementation of the Contract;
   c. Making an estimate of the facilities available and needed for the contract to be bid, if any; and
   d. Inquiring or securing Supplemental/Bid Bulletin(s) issued for the *[Name of the Project]*.

9. *[Name of Bidder]* did not give or pay directly or indirectly, any commission, amount, fee, or any form of consideration, pecuniary or otherwise, to any person or official, personnel or representative of the government in relation to any procurement project or activity.

10. **In case advance payment was made or given, failure to perform or deliver any of the obligations and undertakings in the contract shall be sufficient grounds to constitute criminal liability for Swindling (Estafa) or the commission of fraud with unfaithfulness or abuse of confidence through misappropriating or converting any payment received by a person or entity under an obligation involving the duty to deliver certain goods or services, to the prejudice of the public and the government of the Philippines pursuant to Article 315 of Act No. 3815 s. 1930, as amended, or the Revised Penal Code.**

IN WITNESS WHEREOF, I have hereunto set my hand this __ day of ___, 20__ at _____, Philippines.

_____
Name of Bidder/ Authorized Representative
(Signatory's Legal Capacity)
AFFIANT

[Jurat]
[Format shall be based on the latest Rules on Notarial Practice]

Bid Securing Declaration Form

[shall be submitted with the Bid if bidder opts to provide this form of bid security]

REPUBLIC OF THE PHILIPPINES)
CITY OF _____) S.S.

BID SECURING DECLARATION
Project Identification No.: _____

To: **Philippine Ports Authority**
PPA Building, Bonifacio Drive,
South Harbor, Port Area, Manila

I/We, the undersigned, declare that:

1. I/We understand that, according to your conditions, bids must be supported by a Bid Security, which may be in the form of a Bid Securing Declaration.

2. I/We accept that: (a) I/we will be automatically disqualified from bidding for any procurement contract with any procuring entity for a period of two (2) years upon receipt of your Blacklisting Order; and, (b) I/we will pay the applicable fine provided under Section 6 of the Guidelines on the Use of Bid Securing Declaration, within fifteen (15) days from receipt of the written demand by the procuring entity for the commission of acts resulting to the enforcement of the bid securing declaration under Sections 23.1(b), 34.2, 40.1 and 69.1, except 69.1(f),of the IRR of RA No. 9184; without prejudice to other legal action the government may undertake.

3. I/We understand that this Bid Securing Declaration shall cease to be valid on the following circumstances:

   a. Upon expiration of the bid validity period, or any extension thereof pursuant to your request;
   b. I am/we are declared ineligible or post-disqualified upon receipt of your notice to such effect, and (i) I/we failed to timely file a request for reconsideration or (ii) I/we filed a waiver to avail of said right; and
   c. I am/we are declared the bidder with the Lowest Calculated Responsive Bid, and I/we have furnished the performance security and signed the Contract.

IN WITNESS WHEREOF, I/We have hereunto set my/our hand/s this ____ day of *[month] [year]* at *[place of execution]*.

_____
Name of Bidder/ Authorized Representative
(Signatory's Legal Capacity)
AFFIANT

[Jurat]
[Format shall be based on the latest Rules on Notarial Practice]

CONSTRUCTION METHODOLOGY

Name of Project : _____

Project Description : _____

Location : _____

MINIMUM SCOPE OF CONSTRUCTION METHODOLOGY

A. CONSTRUCTION OF ROCK CAUSEWAY AND BACK UP AREA WITH STAIRLANDING

1. Supply and place 50-100 kg/pc core rocks (3,905 cu.m.) and 500 kg/pc armour rocks (2,079 cu.m.)
2. Supply, spread and compact sand & gravel fill (2,833 cu.m.), aggregate subbase course (596 cu.m.), aggregate base course (176 cu.m.) and geotextile fabric (1,369 sq.m)
3. Construct 250mm thick Portland cement concrete pavement (761 sq.m.) including dowel bars (325.76 kg)
4. Supply and place 3,500 psi concrete for RC curb, stairlanding, and lamp post foundation (143 cu.m.) including steel reinforcements (6,387 kg) and gravel bedding (2 cu.m.)
5. Supply and install mooring cleats including accessories (4 sets)
6. Supply and install port lighting system

B. PASSENGER TERMINAL BUILDING

1. Construction of passenger shed (Area = 141 sq.m.) including structural, architectural, plumbing and sanitary works

NOTES:

The narrative construction method will guide and familiarize the contractor and the PPA on how the project shall be carried out in accordance with the highest standard of workmanship.

The construction method shall be consistent with the Bar Chart / S-Curve Schedule, Equipment Schedule and Manpower Schedule.

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Revised: September 2021

MANPOWER SCHEDULE

Name of Project : _____

Project Description : _____

Location : _____

MANPOWER (Minimum)	CONTRACT DURATION (_____ Calendar Days)												
	MONTHLY												
	1	2	3	4	5	6	7	8	9	10	11	12	13
Project Manager													
Project Engineer													
Materials Engineer I													
Construction Safety and Health Officer													
Foreman													
Carpenter													
Steelman													
Mason													
Electrician													
Rigger													
Others													

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Revised: September 2021

EQUIPMENT UTILIZATION SCHEDULE

Name of Project : _____

Project Description : _____

Location : _____

EQUIPMENT (Minimum)	No. of Units	CONTRACT DURATION (_____ Calendar Days)												
		MONTHLY												
		1	2	3	4	5	6	7	8	9	10	11	12	13

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Revised: September 2021

CASHFLOW BY QUARTER AND PAYMENT SCHEDULE

Name of Project: : _____

Project Description : _____

Location : _____

Project Duration (days or months)	Payment Schedule (Monthly, in Pesos)	Cash flow (Quarterly, in Pesos)
TOTAL		

NOTES

- The cash flow by quarter and payment schedule should be consistent with the Bar Chart and S-curb.
- Payment schedule shall not be more than once a month.

_____
Name of Bidder/Authorized Representative
(Signatory's Legal Capacity)

Revised: September 2021

Contract Agreement Form for the Procurement of Infrastructure Projects (Revised)

[not required to be submitted with the Bid, but it shall be submitted within ten (10) days after receiving the Notice of Award]

CONTRACT AGREEMENT

THIS AGREEMENT, made this _____ day of _____, _____ between **Philippine Ports Authority** with principal office at PPA Building, Bonifacio Drive, South Harbor, Port Area, Manila (hereinafter called the "Entity") and **[name and address of Contractor]** (hereinafter called the "Contractor").

WHEREAS, the Entity is desirous that the Contractor execute **[name and identification number of contract]** (hereinafter called "the Works") and the Entity has accepted the Bid for **[contract price in words and figures in specified currency]** by the Contractor for the execution and completion of such Works and the remedying of any defects therein.

NOW THIS AGREEMENT WITNESSETH AS FOLLOWS:

1. In this Agreement, words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.

2. The following documents as required by the 2016 revised Implementing Rules and Regulations of Republic Act No. 9184 shall be deemed to form and be read and construed as part of this Agreement, *viz.*:

   a. Philippine Bidding Documents (PBDs);
      i. Drawings/Plans;
      ii. Specifications;
      iii. Bill of Quantities;
      iv. General and Special Conditions of Contract;
      v. Supplemental or Bid Bulletins, if any;

   b. Winning bidder's bid, including the Eligibility requirements, Technical and Financial Proposals, and all other documents or statements submitted;

   Bid form, including all the documents/statements contained in the Bidder's bidding envelopes, as annexes, and all other documents submitted (*e.g.*, Bidder's response to request for clarifications on the bid), including corrections to the bid, if any, resulting from the Procuring Entity's bid evaluation;

   c. Performance Security;

   d. Notice of Award of Contract and the Bidder's conforme thereto; and

   e. Other contract documents that may be required by existing laws and/or the Procuring Entity concerned in the PBDs. **Winning bidder agrees that additional contract documents or information prescribed by the GPPB that are subsequently required for submission after the contract execution, such as the Notice to Proceed, Variation Orders, and Warranty Security, shall likewise form part of the Contract.**

3. In consideration for the sum of **[total contract price in words and figures]** or such other sums as may be ascertained, **[Named of the bidder]** agrees to **[state the object of the contract]** in accordance with his/her/its Bid.

4. The **Philippine Ports Authority** agrees to pay the above-mentioned sum in accordance with the terms of the Bidding.

IN WITNESS whereof the parties thereto have caused this Agreement to be executed the day and year first before written.

JAY DANIEL R. SANTIAGO General Manager	**Name of Bidder/ Authorized Representative** (Signatory's Legal Capacity)
for:	for:
Philippine Ports Authority	**Contractor**

Acknowledgment

[Format shall be based on the latest Rules on Notarial Practice]