



## REQUEST FOR QUOTATION (SMALL VALUE PROCUREMENT)

The Philippine Ports Authority, PMO–Zamboanga, Bids and Awards Committee now invites suppliers/contractors to submit price quotations for the following procurement items;

Item	Project Name	Approve Budget for the Contract (ABC)
1	Supply, Installation, Placement and Testing of Electric Kwh Meters, Port of Zamboanga, Zamboanga City	Php997,676.97
2	Repair of Existing Windows and Doors and Dilapidated Ceiling Eaves at Ground Floor PPA Administration Building Port of Zamboanga, Zamboanga City	Php337,312.76

Bids/Quotations received in excess of the ABC (Php997,676.97 and Php337,312.76, respectively) shall be automatically rejected at Bid opening.

Procurement will be conducted in consonance with Section 53.9 (Small Value Procurement) of the Revised Implementing Rules and Regulations Part A (IRR-A) of Republic Act 9184 (R.A. 9184), otherwise known as the “Government Procurement Reform Act”. Only sealed bids/Quotations from eligible bidders will be opened and a contract will only be awarded to the Lowest Calculated Responsive Quotation.

The Opening of Sealed Quotation Envelopes shall be at 10:00 AM, June 20, 2018, Conference Room, 2<sup>nd</sup> Floor PPA Administration Building, Port Area, Zamboanga City.

The PPA, PMO-Zamboanga reserves the right to reject any and all bids, declare a failure of bidding, or not award the contract at any time prior to contract award in accordance with Section 41 of RA 9184 and its IRR, without thereby incurring any liability to the affected bidder or bidders.

For further information, please refer to:

The BAC Secretariat Head  
Administrative Division, 2<sup>nd</sup> Floor PPA Administration Building  
PPA, PMO-Zamboanga, Port Area, Zamboanga City 7000  
Tel Nos. (062) 991-2037, (062) 991-0650; Fax No. (062) 991-2360

  
**ENGR. JOHNSON D. KHO**  
BAC Chairperson  
PPA, PMO-Zamboanga, Port Area, Zamboanga City 7000

PPA website: [www.ppa.com.ph](http://www.ppa.com.ph)  
PhilGEPS Website: [www.philgeps.net](http://www.philgeps.net)  
Date of Publication: June 6-20, 2018  
Project No. (Item 1): RM- 01-2018  
Project No. (Item 2): RM- 02-2018  
Encl.: Canvass Form & Approved Agency Estimate



## CANVASS FORM (FOR ITEM 2)

Date: \_\_\_\_\_

I JO/PR Number: ZAM-304-18(M)

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
(Supplier)

Gentlemen: Please quote your government price/s for the article/s listed hereunder:

Item No.	Qty	Unit	Articles	Unit Cost	Amount
<b>Supply of labor, materials and equipment for Repair of Existing Windows and Doors and Dilapidated Ceiling Eaves at Ground Floor PPA Administration Building Port of Zamboanga, Zamboanga City</b>					
<b>Scope of Work:</b>					
I.a	1	L.s.	101(1): Removal of Existing Casement Windows, Doors and Ceiling		
II.a	2.22	m <sup>3</sup>	900(1)c2: Structural Concrete		
II.b	219.19	Kgs.	902 (1) a1: Reinforcing Steel (Deformed Grade 40)		
II.c	32.23	m <sup>2</sup>	903(2):Formworks and Falseworks		
III.a	15.15	m <sup>2</sup>	1008: Fabricated Aluminum Glass Window (Sliding and Fixed)		
III.b	5.04	m <sup>2</sup>	1010(2)b: Wooden Panel Door		
III.c	1.92	m <sup>2</sup>	1007: Aluminum Glass Door (Swing Type)		
IV.a	29.12	m <sup>2</sup>	1003: Pre-painted Bended Metal Sheet on Metal Frame Ceiling		
IV.b	3	E-Units	SPL. 1: Electrical Works		
V.a	0.82	m <sup>3</sup>	803(1)b.: Structural Excavation		
V.b	1.50	m <sup>3</sup>	804(1)a.: Embankment (From Structure Excavation)		
V.c	4.72	m <sup>2</sup>	1046: CHB Non Load Bearing (Including Reinforcing Steel)		
V.d	0.14	m <sup>2</sup>	1024(1): Pea Gravel Finish		
VI.a	15.26	Ln.m.	401(1)a: Stainless Steel Railings		
<b>Terms and Conditions:</b>					
1. Term of Payment - 100% Payment upon Completion;					
2. Project Duration - 27 Calendar Days;					
3. Performance Security - in accordance with schedule provided under Sect. 39.2 of RA 9184;					
4. Warranty: One (1) year after acceptance;					
5. Quotations should be submitted in a sealed envelope;					
6. Itemized Detailed Cost Estimates.					
<i>x-x-x-Nothing Follows-x-x-x</i>					

16



---

Please submit your sealed quotation envelope on or before 9:30 AM June 20, 2018.

**Chris V. Suano**  
Senior Engineer A  
-----  
Canvasser

Very truly yours,

**JOHNSON D. KHO**  
ESD Manager

The above price/s and/or quotation/s for the article/s you wish to purchase/repair is/are available within \_\_\_\_\_ days from the date of quotation.

---

**AUTHORIZED SIGNATURE**

---

**Name of Supplier/Firm/Company**

Date quoted : \_\_\_\_\_  
Price Valid for : \_\_\_\_\_  
Terms : \_\_\_\_\_





## APPROVED AGENCY ESTIMATE

PROJECT: Repair of Existing Windows and Doors and Dilapidated Ceiling Eaves at Ground Floor PPA Administration Building  
 LOCATION: Port of Zamboanga, Zamboanga City  
 SUBJECT: TOTAL PROJECT COST OF ITEM 2

Item	Description	Unit	Qty	Unit Cost	Amount
<b>Supply of labor, materials and equipment for Repair of Existing Windows and Doors and Dilapidated Ceiling Eaves at Ground Floor PPA Administration Building</b>					
	Materials:				
	1. 40 Kgs. Portland Cement – 24.118 Bags				
	2. Coarse Aggregate G-1 -3 m3				
	3. Fine Aggregate S-1 – 4 m3				
	4. Water – 336 lts.				
	5. 50mm (2") X 50mm (2") X 8'				
	6. Lumber – 85 Pcs				
	7. 12.5mm (1/2") X 1.2m (4') X 2.4m (8')				
	8. Ordinary Plywood – 1 Pcs.				
	9. Reinforcing Steel Bars Deformed Grade 40 – 235.19 Kgs.				
	10. # 16 GI Tie Wire – 5 Kgs				
	11. Sliding Window - Fabricated Powder Coated Frame with 6mm Reflected Glass with Double Jamb and Complete Accessories – 3 Units				
	12. Fixed Window - Fabricated Powder Coated Frame with 6mm Reflected Glass with Double Jamb and Complete Accessories – 5 Units				
	13. Exhaust Frame - Fabricated Powder Coated Frame – 3 Units				
	14. Aluminum Glass Door – 1 Set				
	15. Wooden Panel Door – 3 Pcs.				
	16. Wooden Door Jambs – 3 Set				
	17. Door Knob – 3 Set				
	18. Door Hinges – 9 Pcs.				
	19. Door Closer – 3 Set				
	20. Pre-painted Inverted Minirib/Spandrel – 29.12 m2				
	21. Single Metal Furring (0.4mm X 26mm X 5m) – 11 Pcs.				
	22. Carrying Channel (0.4mm X 37mm X 5m) -15 Pcs.				
	23. Wall Angle (25mm X 3.66m) – 15 Pcs.				
	24. Fascia Cover (16"(400mm) X 1.22m) – 18 Pcs.				
	25. Tee Runner (25.4mm X 38mm X 12m) – 2 Pcs.				
	26. Blind Rivets – 554 Pcs.				
	27. 3.5mm2 Thick Electrical Wire – 10 m				



	28. Octagon Box - 1				
	29. 18 W LED Pinlight – 2 Pcs.				
	30. 100mm Thk. CHB (Non Load Bearing) – 59 Pcs				
	31. Pea Gravel (25Kgs Bag) – 1 Bag				
	32. 1 1/2" (38mm) Ø X 6m 304-Stainless Steel – 3 Pcs.				
	33. Welding Rod – 1 Kgs.				
	34. Plain Steel Bars Grade 40 – 1 Kgs				
A	MOBILIZATION/DEMOBILIZATION				
B	MATERIAL COST				
C	LABOR COST				
D	EQUIPMENT COST				
E	SAFETY AND HEALTH				
F	<b>DIRECT COST; [(A) + (B)]</b>				
G	<b>OCM [up to 15% OF (F)]</b>				
H	<b>PROFIT [up to 10% OF (F)]</b>				
I	<b>12% VAT OF [(F)+(G)+(H)]</b>				
J	<b>TOTAL PROJECT COST; [(F)+(G)+(H)+(I)]</b>				<b>(Php337,312.76)</b>

Note: Based from the approved program of works and drawings.

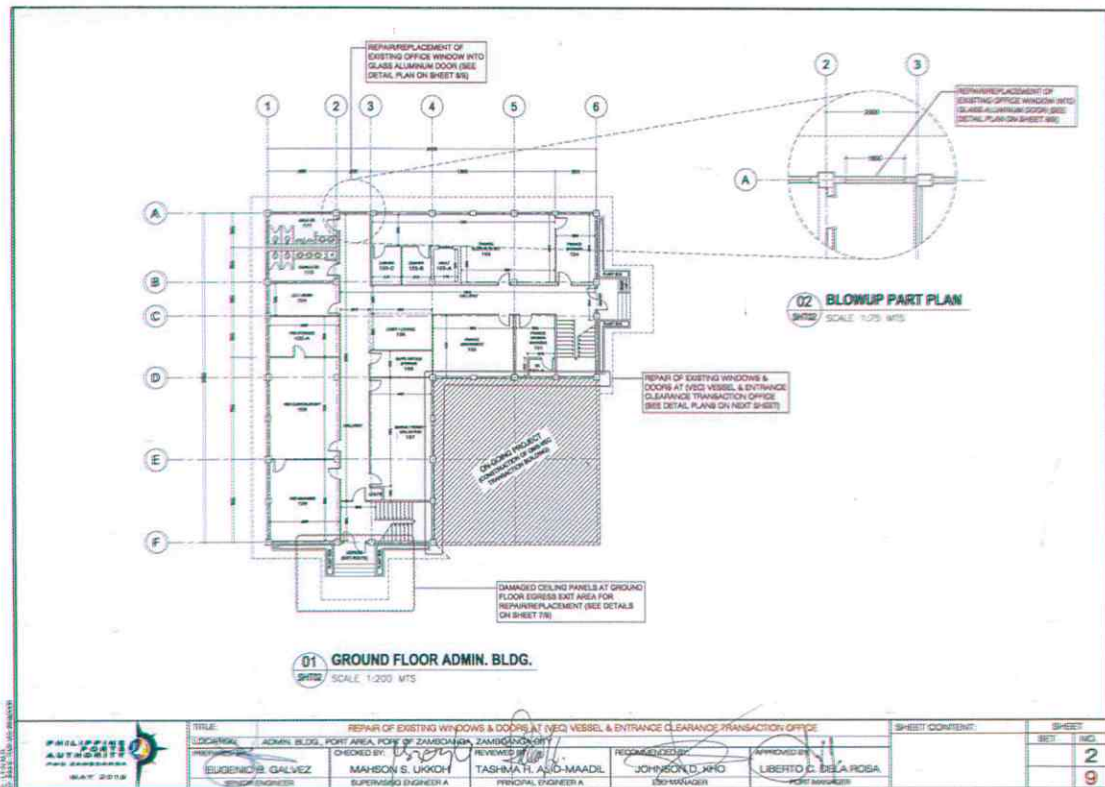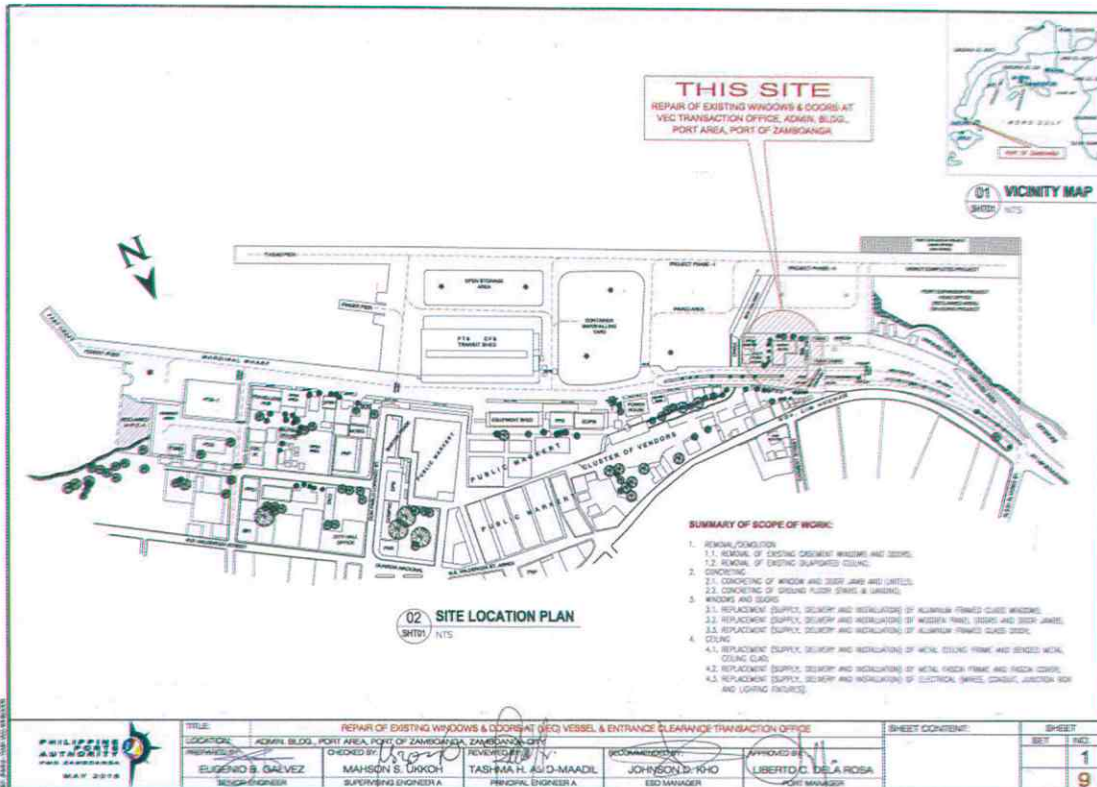


10




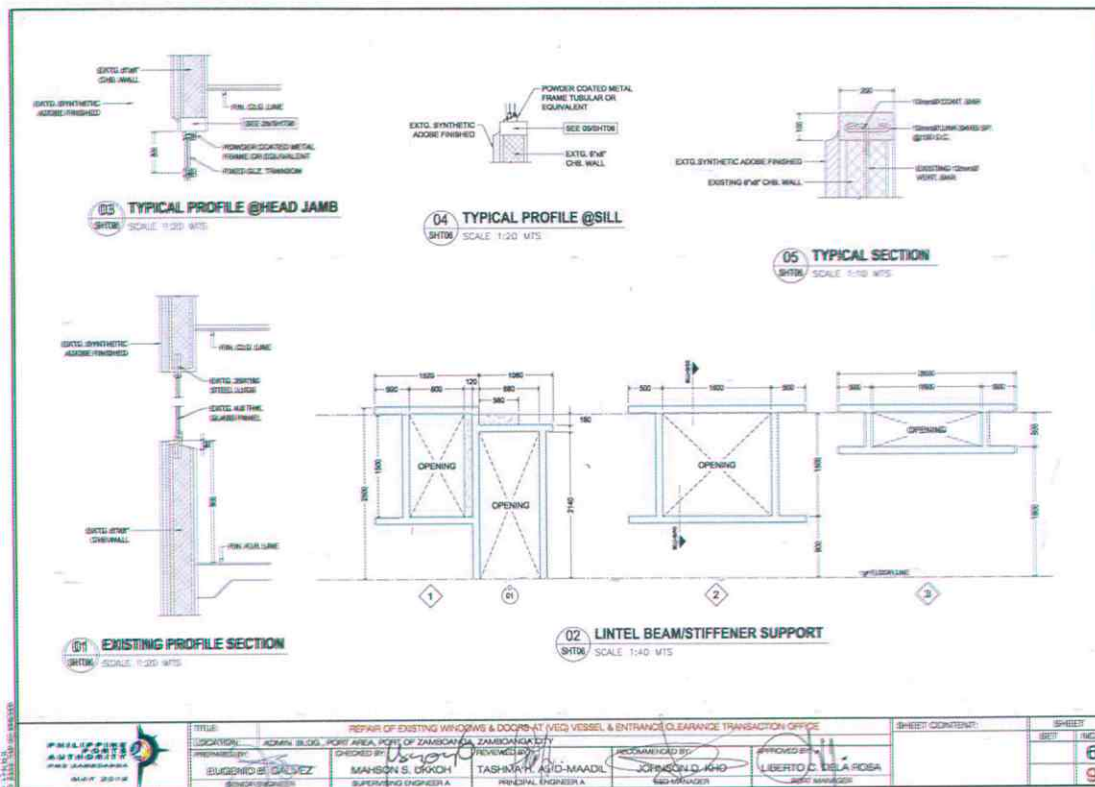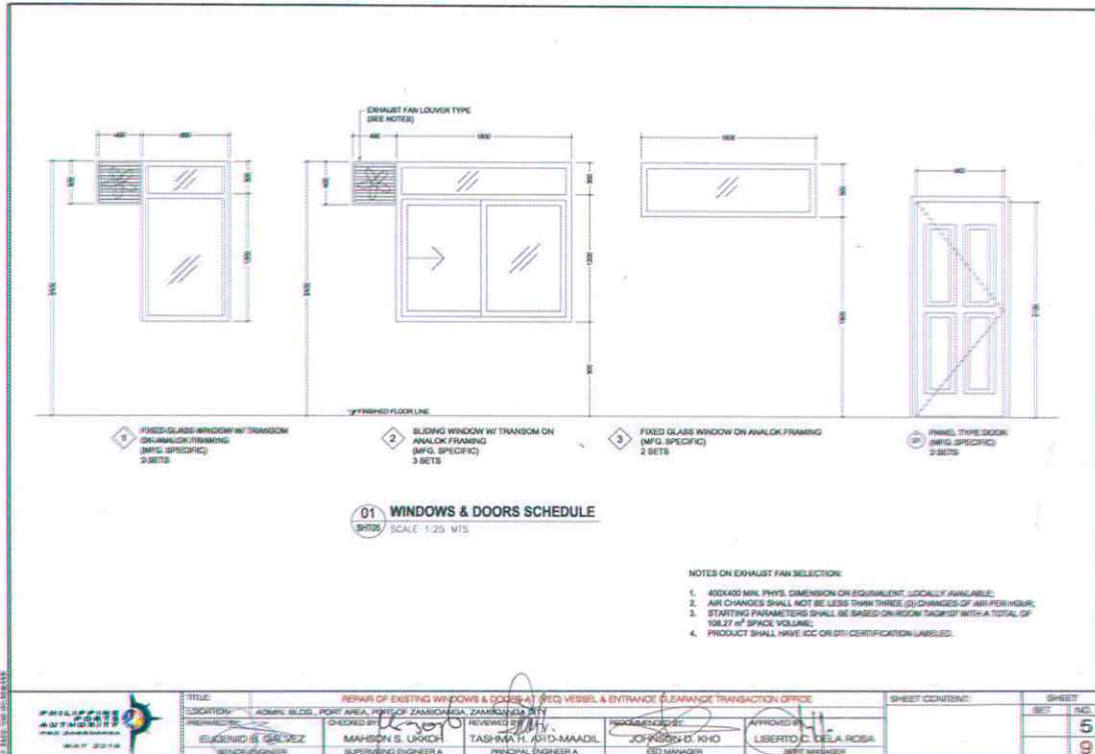


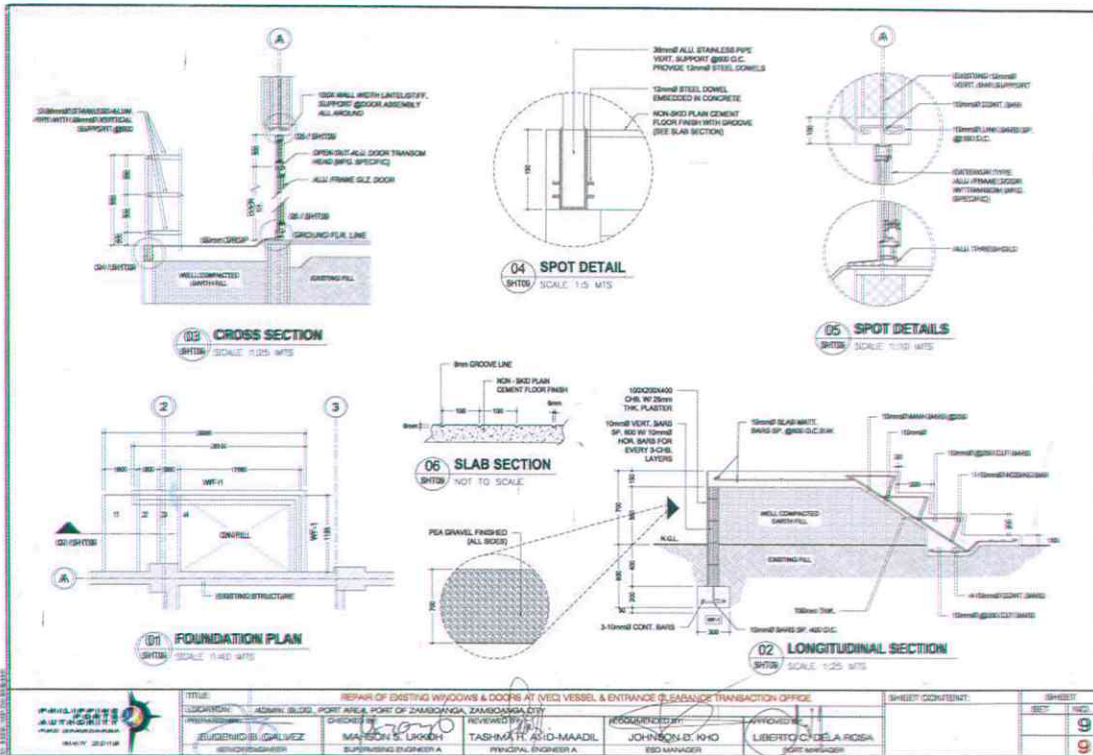


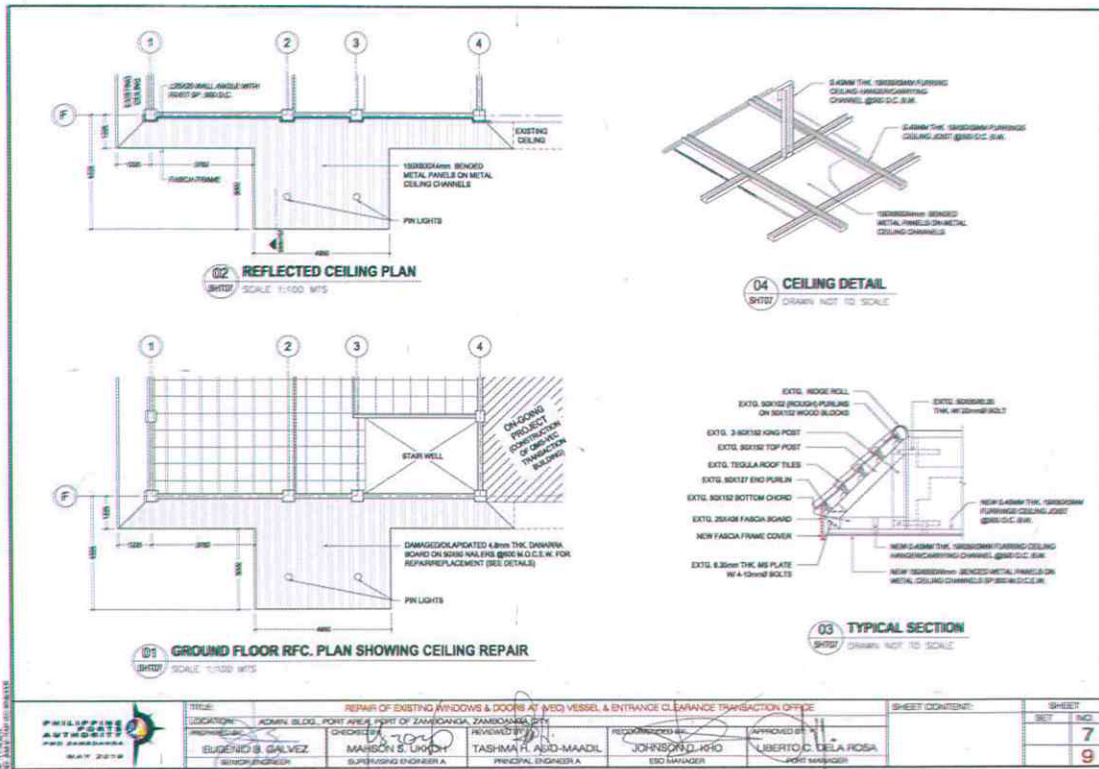

	<b>TITLE:</b> REPAIR OF EXISTING WINDOWS & DOORS AT MEO VESSEL & ENTRANCE CLEARANCE TRANSACTION OFFICE					<b>SHEET CONTENT:</b>		<b>SHEET</b>		
	<b>LOCATION:</b> ADMIN. BLDG., PORT AREA, PORT OF ZAMBOANGA, ZAMBOANGA CITY	<b>DESIGNED BY:</b> EUGENIO B. GALVEZ SUPERVISING ENGINEER	<b>CHECKED BY:</b> MARSON S. UROCH SUPERVISING ENGINEER A	<b>REVIEWED BY:</b> TASHIMA H. ASID-MAADIL PRINCIPAL ENGINEER A	<b>RECOMMENDED BY:</b> JOHNSON D. RHO ESD MANAGER	<b>APPROVED BY:</b> LIBERTO C. DELA ROSA PORT MANAGER	<b>NO.</b> 7	<b>NO.</b> 9		

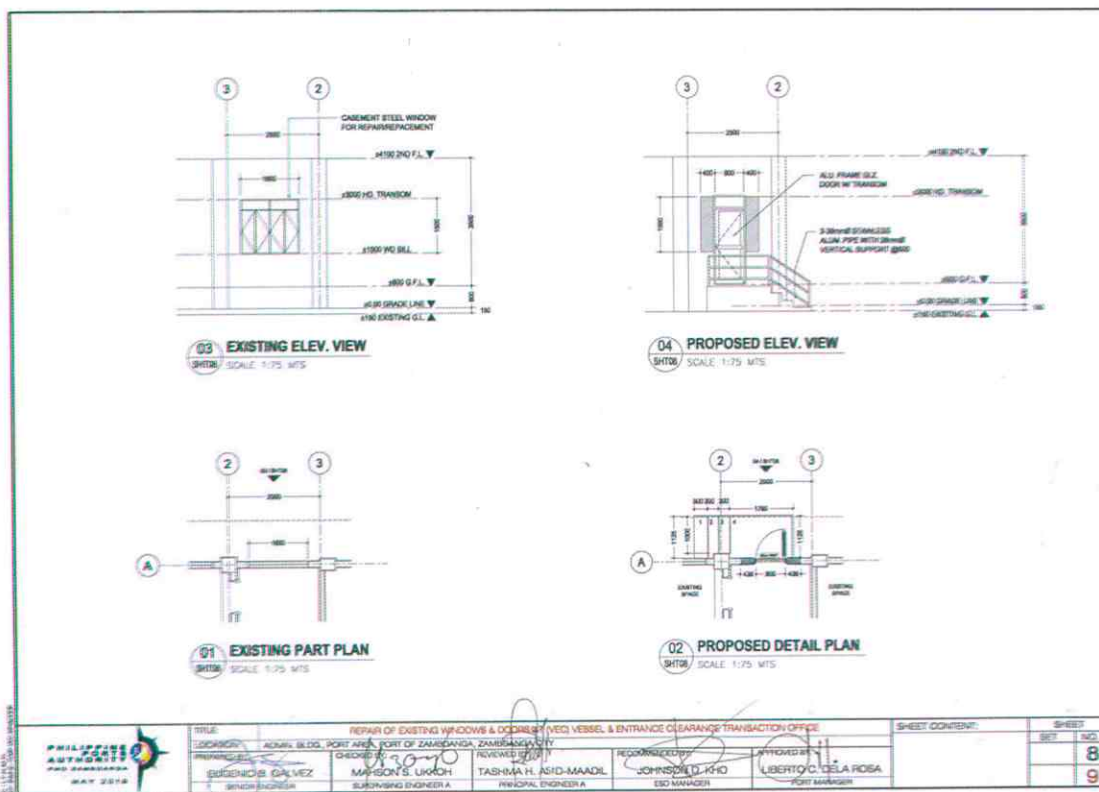

	<b>TITLE:</b> REPAIR OF EXISTING WINDOWS & DOORS AT MEO VESSEL & ENTRANCE CLEARANCE TRANSACTION OFFICE					<b>SHEET CONTENT:</b>		<b>SHEET</b>		
	<b>LOCATION:</b> ADMIN. BLDG., PORT AREA, PORT OF ZAMBOANGA, ZAMBOANGA CITY	<b>DESIGNED BY:</b> EUGENIO B. GALVEZ SUPERVISING ENGINEER	<b>CHECKED BY:</b> MARSON S. UROCH SUPERVISING ENGINEER A	<b>REVIEWED BY:</b> TASHIMA H. ASID-MAADIL PRINCIPAL ENGINEER A	<b>RECOMMENDED BY:</b> JOHNSON D. RHO ESD MANAGER	<b>APPROVED BY:</b> LIBERTO C. DELA ROSA PORT MANAGER	<b>NO.</b> 8	<b>NO.</b> 9		



 <p>PHILIPPINE PORTS AUTHORITY</p>	<p>TITLE: REPAIR OF EXISTING WINDOWS &amp; DOORS AT VESSEL &amp; ENTRANCE (SARALOG TRANSACTION OFFICE)</p>					<p>SHEET CONTENT:</p> <table border="1"> <tr> <td>NO.</td> <td>DESCRIPTION</td> </tr> <tr> <td>1</td> <td>REPAIR OF EXISTING WINDOWS &amp; DOORS AT VESSEL &amp; ENTRANCE (SARALOG TRANSACTION OFFICE)</td> </tr> </table>	NO.	DESCRIPTION	1	REPAIR OF EXISTING WINDOWS & DOORS AT VESSEL & ENTRANCE (SARALOG TRANSACTION OFFICE)
	NO.	DESCRIPTION								
1	REPAIR OF EXISTING WINDOWS & DOORS AT VESSEL & ENTRANCE (SARALOG TRANSACTION OFFICE)									
<p>DESIGNED BY: ALDWIN S. BLOD</p> <p>PREPARED BY: EUGENIO B. GALVEZ</p> <p>CHECKED BY: MARSON S. UKODIN</p>	<p>PORT AREA, PORT OF ZAMBOANGA, ZAMBOANGA CITY</p> <p>DATE: 08/08/2018</p>	<p>REVIEWED BY: TASH-MAT. ASID-MAADIL</p> <p>PRINCIPAL ENGINEER A</p>	<p>RECOMMENDED BY: JOHN NICHOL D. KIO</p> <p>ESD MANAGER</p>	<p>APPROVED BY: LIBERTO C. DELA ROSA</p> <p>PORT SUPERVISOR</p>	<p>DATE: 08/08/2018</p>					

2